



# AS3020: Aerospace Structures

## Module 5: Torsion of Beams


**Instructor: Nidish Narayanaa Balaji**

**Dept. of Aerospace Engg., IIT-Madras, Chennai**


October 9, 2024

# Table of Contents

- 1 Solid Section Torsion
  - Stress Formulation
  - Displacement Formulation
  - Section Moment
  - Membrane Analogy
  - Tutorial: Elliptical Section
  - Rectangular Sections
- 2 Torsion of Thin-Walled Sections
  - Coordinate Transformations
  - Closed Sections
  - Open Sections
  - Combined Cells
- 3 Summary of Final Expressions




Chapter 9 in Sadd [1]



Chapters 3, 17-19  
in Megson [2]

# 1. Solid Section Torsion

## Basic Setup

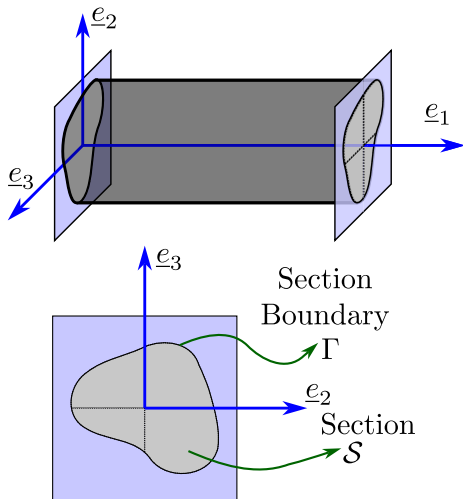

- We assume:

- ① No direct stresses applied:

$$\sigma_{11} = \sigma_{22} = \sigma_{33} = 0$$

- ② Sections “rotate rigidly”:

$$\gamma_{23} = 0 \implies \sigma_{23} = 0.$$

- ③ Body is at equilibrium under constant torque applied at right end.

- We will denote the section by  $S$  and the section-boundary by  $\Gamma$ .

# 1.1. Stress Formulation

## Solid Section Torsion

- Since we assume  $\sigma_{11} = \sigma_{22} = \sigma_{33} = \sigma_{23} = 0$ , the equilibrium equations read,

$$\sigma_{12,2} + \sigma_{13,3} = 0, \quad \sigma_{12,1} = 0, \quad \sigma_{13,1} = 0.$$

- We introduce the **Prandtl Stress Function**  $\phi(X_2, X_3)$  (no dependence on  $X_1$ ) such that

$$\sigma_{12} = \phi_{,3}, \quad \sigma_{13} = -\phi_{,2}.$$

This satisfies equilibrium by definition.

- In terms of strains the above assumptions imply that we only have  $E_{12}$  and  $E_{13}$  active. **Recall** that Strain compatibility is  $\epsilon_{mjk}\epsilon_{nil}E_{ij,mn} = 0$  (see Module 3).
- The non-trivial compatibility equations read,

$$\left. \begin{aligned} E_{12,23} - E_{13,22} &= 0 \\ E_{12,33} - E_{13,23} &= 0 \end{aligned} \right\} \implies \left. \begin{aligned} \phi_{,332} + \phi_{,222} &= 0 \\ \phi_{,333} + \phi_{,322} &= 0 \end{aligned} \right\} \implies \boxed{\nabla^2 \phi = \text{constant}}.$$

- This is known as the **Poisson's problem**. What about Boundary Conditions?

# 1.1. Stress Formulation

## Solid Section Torsion

- Since we assume  $\sigma_{11} = \sigma_{22} = \sigma_{33} = \sigma_{23} = 0$ , the equilibrium equations read,

$$\sigma_{12,2} + \sigma_{13,3} = 0, \quad \sigma_{12,1} = 0, \quad \sigma_{13,1} = 0.$$

- We introduce the **Prandtl Stress Function**  $\phi(X_2, X_3)$  (no dependence on  $X_1$ ) such that

$$\sigma_{12} = \phi_{,3}, \quad \sigma_{13} = -\phi_{,2}.$$

This satisfies equilibrium by definition.

- In terms of strains the above assumptions imply that  $E_{11}$  and  $E_{13}$  are active. **Recall** that Strain compatibility (see Module 3).
- The non-trivial compatibility equations read,



$$\left. \begin{aligned} E_{12,23} - E_{13,22} &= 0 \\ E_{12,33} - E_{13,23} &= 0 \end{aligned} \right\} \implies \left. \begin{aligned} \phi_{,332} + \phi_{,222} &= 0 \\ \phi_{,333} + \phi_{,322} &= 0 \end{aligned} \right\} \implies \nabla^2 \phi = \text{constant}.$$

Kinematic considerations will give us this "constant".

- This is known as the **Poisson's problem**. What about Boundary Conditions?

# 1.1. Stress Formulation

## Solid Section Torsion

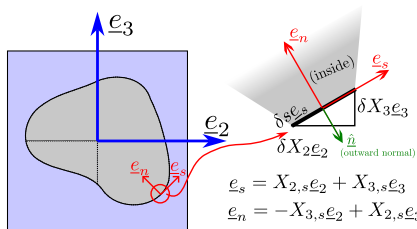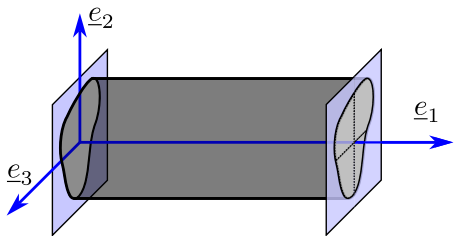

$$\begin{aligned} \underline{e}_s &= X_{2,s} \underline{e}_2 + X_{3,s} \underline{e}_3 \\ \underline{e}_n &= -X_{3,s} \underline{e}_2 + X_{2,s} \underline{e}_3 \end{aligned}$$

- We derive the coordinate transformation on the boundary as follows:

$$dX_2 \underline{e}_2 + dX_3 \underline{e}_3 = ds \underline{e}_s + dn \underline{e}_n$$

$$\Rightarrow \begin{bmatrix} dX_2 \\ dX_3 \end{bmatrix} = \begin{bmatrix} \langle \underline{e}_2, \underline{e}_s \rangle & \langle \underline{e}_2, \underline{e}_n \rangle \\ \langle \underline{e}_3, \underline{e}_s \rangle & \langle \underline{e}_3, \underline{e}_n \rangle \end{bmatrix} \begin{bmatrix} ds \\ dn \end{bmatrix}$$


$$\begin{aligned} \text{and, } \begin{bmatrix} \underline{e}_s \\ \underline{e}_n \end{bmatrix} &= \begin{bmatrix} \langle \underline{e}_2, \underline{e}_s \rangle & \langle \underline{e}_3, \underline{e}_s \rangle \\ \langle \underline{e}_2, \underline{e}_n \rangle & \langle \underline{e}_3, \underline{e}_n \rangle \end{bmatrix} \begin{bmatrix} \underline{e}_2 \\ \underline{e}_3 \end{bmatrix} \\ &= \begin{bmatrix} X_{2,s} & X_{3,s} \\ X_{2,n} & X_{3,n} \end{bmatrix} \begin{bmatrix} \underline{e}_2 \\ \underline{e}_3 \end{bmatrix} \end{aligned}$$

- Considering only Cartesian transformations (inverse has to be transpose), we will also have

$$\begin{bmatrix} \underline{e}_s \\ \underline{e}_n \end{bmatrix} = \begin{bmatrix} X_{3,n} & -X_{2,n} \\ -X_{3,s} & X_{2,s} \end{bmatrix} \begin{bmatrix} \underline{e}_2 \\ \underline{e}_3 \end{bmatrix}.$$

# 1.1. Stress Formulation

## Solid Section Torsion

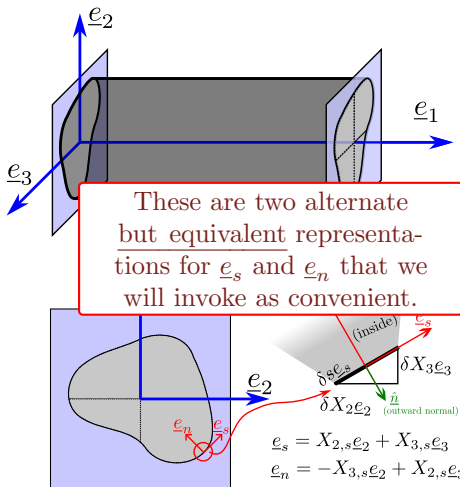

- We derive the coordinate transformation on the boundary as follows:

$$dX_2\underline{e}_2 + dX_3\underline{e}_3 = ds\underline{e}_s + dn\underline{e}_n$$

$$\Rightarrow \begin{bmatrix} dX_2 \\ dX_3 \end{bmatrix} = \begin{bmatrix} \langle \underline{e}_2, \underline{e}_s \rangle & \langle \underline{e}_2, \underline{e}_n \rangle \\ \langle \underline{e}_3, \underline{e}_s \rangle & \langle \underline{e}_3, \underline{e}_n \rangle \end{bmatrix} \begin{bmatrix} ds \\ dn \end{bmatrix}$$

$$\text{and, } \begin{bmatrix} \underline{e}_s \\ \underline{e}_n \end{bmatrix} = \begin{bmatrix} \langle \underline{e}_2, \underline{e}_s \rangle & \langle \underline{e}_3, \underline{e}_s \rangle \\ \langle \underline{e}_2, \underline{e}_n \rangle & \langle \underline{e}_3, \underline{e}_n \rangle \end{bmatrix} \begin{bmatrix} \underline{e}_2 \\ \underline{e}_3 \end{bmatrix}$$

$$= \begin{bmatrix} X_{2,s} & X_{3,s} \\ X_{2,n} & X_{3,n} \end{bmatrix} \begin{bmatrix} \underline{e}_2 \\ \underline{e}_3 \end{bmatrix}$$

- Considering only Cartesian transformations (inverse has to be transpose), we will also have

$$\begin{bmatrix} \underline{e}_s \\ \underline{e}_n \end{bmatrix} = \begin{bmatrix} X_{3,n} & -X_{2,n} \\ -X_{3,s} & X_{2,s} \end{bmatrix} \begin{bmatrix} \underline{e}_2 \\ \underline{e}_3 \end{bmatrix}$$

# 1.1. Derivation of Coordinate Transformation Relationships

## Stress Formulation

- For cartesian transformations, the determinant has to be unity. So the inverse can be written as

$$\underbrace{\begin{bmatrix} X_{2,s} & X_{3,s} \\ X_{2,n} & X_{3,n} \end{bmatrix}}_{\mathbb{T}^{-1}}^{-1} = \underbrace{\begin{bmatrix} X_{3,n} & -X_{3,s} \\ -X_{2,n} & X_{2,s} \end{bmatrix}}_{Adj(\mathbb{T})}.$$

- Also, for cartesian transformations, the inverse has to be the transpose of the matrix. So we have

$$\underbrace{\begin{bmatrix} X_{2,s} & X_{2,n} \\ X_{3,s} & X_{3,n} \end{bmatrix}}_{\mathbb{T}^T} = \underbrace{\begin{bmatrix} X_{3,n} & -X_{3,s} \\ -X_{2,n} & X_{2,s} \end{bmatrix}}_{\mathbb{T}^{-1}}.$$

- So the following equalities make sense:

$$\boxed{\begin{bmatrix} \underline{e}_s \\ \underline{e}_n \end{bmatrix}} = \begin{bmatrix} X_{2,s} & X_{3,s} \\ X_{2,n} & X_{3,n} \end{bmatrix} \begin{bmatrix} \underline{e}_2 \\ \underline{e}_3 \end{bmatrix}, \text{ and } \boxed{\begin{bmatrix} \underline{e}_s \\ \underline{e}_n \end{bmatrix}} = \begin{bmatrix} X_{3,n} & -X_{2,n} \\ -X_{3,s} & X_{2,s} \end{bmatrix} \begin{bmatrix} \underline{e}_2 \\ \underline{e}_3 \end{bmatrix}.$$




$\mathbb{T}^{-T}$



# 1.1. Stress Formulation

## Solid Section Torsion

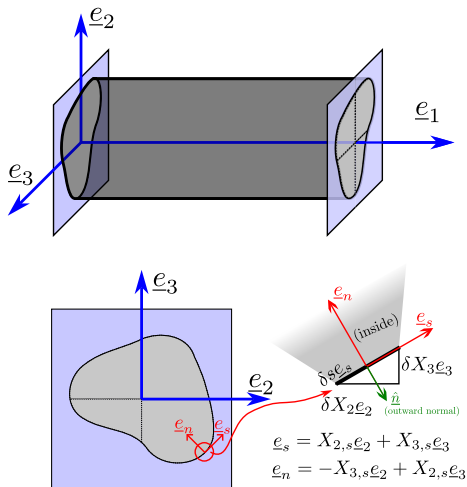

We invoke

$$\underline{e}_n = -X_{3,s}\underline{e}_2 + X_{2,s}\underline{e}_3 \text{ here.}$$

- Enforcing stress-free section boundary condition leads to:

$$\begin{bmatrix} 0 & \sigma_{12} & \sigma_{13} \\ \sigma_{12} & 0 & 0 \\ \sigma_{13} & 0 & 0 \end{bmatrix} \begin{bmatrix} 0 \\ X_{3,s} \\ -X_{2,s} \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$$

$$\implies \sigma_{12}X_{3,s} - \sigma_{13}X_{2,s} = 0$$


$$(\phi_{,3}X_{3,s} + \phi_{,2}X_{2,s}) = \phi_{,s} = 0$$

- That is, on the section-boundary, the stress function is constant, set to 0 w.l.o.g.:

$$\phi = \underline{\text{constant}} \rightarrow 0 \text{ on } \Gamma.$$

## 1.2. Displacement Formulation

### Solid Section Torsion

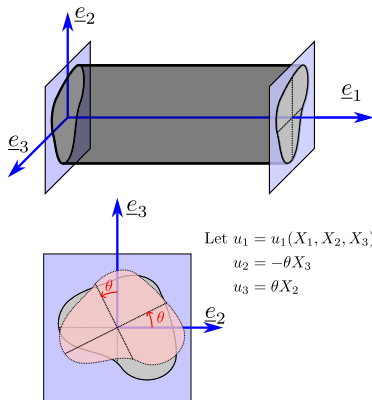

- The strains are,

$$E_{11} = u_{1,1} = 0$$

$$E_{22} = -\theta_{,2} X_3 = 0$$

$$E_{33} = \theta_{,3} X_2 = 0$$

$$2E_{23} = \theta - \theta = 0$$

$$2E_{12} = u_{1,2} - \theta_{,1} X_3 = \frac{\sigma_{12}}{G} = \frac{\phi_{,3}}{G}$$

$$2E_{13} = u_{1,3} + \theta_{,1} X_2 = \frac{\sigma_{13}}{G} = -\frac{\phi_{,2}}{G}$$


- Differentiating the strain expressions for  $\sigma_{12}$  and  $\sigma_{13}$  above allows us to write:

$$\phi_{,kk} = -2G\theta_{,1},$$

which gives us the “constant” required for the Poisson problem from before (along with the B.C.  $\phi = 0$  on  $\Gamma$ ).

# 1.3. Section Moment

## Solid Section Torsion

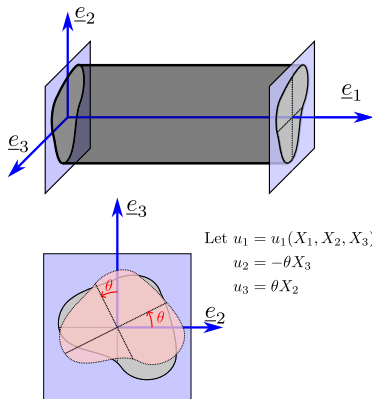

- The non-trivial shear strains are:

$$\sigma_{12} = \phi_{,3} = G(u_{1,2} - X_3\theta_{,1})$$

$$\sigma_{13} = -\phi_{,2} = G(u_{1,3} + X_2\theta_{,1})$$

- The moment about  $\underline{e}_1$  is



$$M_1 = \int_S (X_2\sigma_{13} - X_3\sigma_{12})dA.$$

- Since  $\sigma_{12}$  and  $\sigma_{13}$  are expressed in terms of **kinematic quantities** as well as the **stress function**  $\phi$ , we will write down relationships with both before proceeding.
- It is also obvious that  $\phi_{,kk} = -2G\theta_{,1}$  implies

$$u_{1,kk} = 0.$$

# 1.3. Section Moment

## Solid Section Torsion

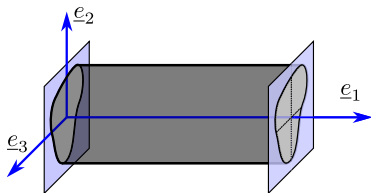

$$\begin{aligned} \text{Let } u_1 &= u_1(X_1, X_2, X_3) \\ u_2 &= -\theta X_3 \\ u_3 &= \theta X_2 \end{aligned}$$

This is the governing equation in terms of the section-axial displacement field.

- The non-trivial shear strains are:

$$\sigma_{12} = \phi_{,3} = G(u_{1,2} - X_3\theta_{,1})$$

$$\sigma_{13} = -\phi_{,2} = G(u_{1,3} + X_2\theta_{,1})$$

- The moment about  $\underline{e}_1$  is

$$M_1 = \int_S (X_2\sigma_{13} - X_3\sigma_{12})dA.$$

- Since  $\sigma_{12}$  and  $\sigma_{13}$  are expressed in terms of **kinematic quantities** as well as the **stress function**  $\phi$ , we will write down relationships with both before proceeding.
- It is also obvious that  $\phi_{,kk} = -2G\theta_{,1}$  implies

$$u_{1,kk} = 0.$$

# 1.3. Section Moment

## Solid Section Torsion

### In terms of stress function

$$\begin{aligned}
 M_1 &= \int_S (X_2 \sigma_{13} - X_3 \sigma_{12}) dA \\
 &= - \int_S (\phi_{,2} X_2 + \phi_{,3} X_3) dA
 \end{aligned}$$

$$M_1 = 2 \int_S \phi dA .$$

### In terms of kinematic description

$$\begin{aligned}
 M_1 &= G \int_S (X_2 u_{1,3} - X_3 u_{1,2}) dA \\
 &\quad + G \underbrace{\int_S (X_2^2 + X_3^2) dA}_{I_{11}} \theta_{,1}
 \end{aligned}$$

$$\begin{aligned}
 &= G I_{11} \theta_{,1} + G \int_S \epsilon_{ijk} X_j u_{1,k} dA \\
 &= G I_{11} \theta_{,1} + G \int_S \epsilon_{ijk} (X_j u_1)_{,k} dA \\
 &\quad - G \int_S \epsilon_{ijk} \delta_{jk} u_1 dA
 \end{aligned}$$

$$M_1 = G I_{11} \theta_{,1} + G \int_{\Gamma} \epsilon_{1jk} X_j n_k u_1 d|s|$$

$$M_1 = G I_{11} \theta_{,1} + G \int_{\Gamma} (\underline{X} \times \underline{n})_1 u_1 d|s| .$$

# 1.3. Section Moment

## Solid Section Torsion

### In terms of stress function

$$M_1 = \int_S (X_2 \sigma_{13} - X_3 \sigma_{12}) dA$$

$$= - \int_S (\phi_{,2} X_2 + \phi_{,3} X_3) dA$$

$$M_1 = 2 \int_S \phi dA .$$

### In terms of kinematic description

$$M_1 = G \int_S (X_2 u_{1,3} - X_3 u_{1,2}) dA$$

$$+ G \underbrace{\int_S (X_2^2 + X_3^2) dA}_{I_{11}} \theta_{,1}$$

$$= G I_{11} \theta_{,1} + G \int \epsilon_{1jk} X_j u_{1,k} dA$$

This term is clearly zero for a perfectly circular section. What about other types?

$$M_1 = G I_{11} \theta_{,1} + G \int_{\Gamma} \epsilon_{1jk} X_j n_k u_1 d|s|$$

$$M_1 = G I_{11} \theta_{,1} + G \int_{\Gamma} (\underline{X} \times \underline{n})_1 u_1 d|s| .$$

# 1.3. Section Moment

## Solid Section Torsion

### In terms of stress function

$$M_1 = \int_S (X_2 \sigma_{13} - X_3 \sigma_{12}) dA$$

$$= - \int_S (\phi_{,2} X_2 + \phi_{,3} X_3) dA$$

$$M_1 = 2 \int_S \phi dA .$$

### In terms of kinematic description

$$M_1 = G \int_S (X_2 u_{1,3} - X_3 u_{1,2}) dA$$

$$+ G \underbrace{\int_S (X_2^2 + X_3^2) dA}_{I_{11}} \theta_{,1}$$

$$= G I_{11} \theta_{,1} + G \int \epsilon_{1jk} X_j u_{1,k} dA$$

This term is clearly zero for a perfectly circular section. What about other types?

**Not zero in the general case.**

$$M_1 = G I_{11} \theta_{,1} + G \int_{\Gamma} (\underline{X} \times \underline{n})_1 u_1 d|s| .$$

## 1.3. Section Moment: St. Venant's Warping Function

### Solid Section Torsion

- For a “pure twist” condition, due to **translational symmetry**,  $u_1$  can not depend on  $X_1$ . It also makes sense that  $u_1$  has to be proportional to the twist  $\theta$  somehow.
- Since  $\theta$  depends on  $X_1$ , but  $\theta_{,1}$  is a constant, St. Venant introduced a warping function  $\psi(X_2, X_3)$  such that

$$u_1 = \theta_{,1} \psi(X_2, X_3).$$

- Under this definition, the effective moment  $M_1$  can be given as,

$$M_1 = G \underbrace{\left( I_{11} + \int_{\Gamma} (\underline{X} \times \underline{n})_1 \psi d|s| \right)}_J \theta_{,1} = GJ\theta_{,1}.$$

- Alternatively,  $J$  can also be written as,

$$J = I_{11} + \int_{\mathcal{S}} X_2 \psi_{,3} - X_3 \psi_{,2} dA$$



## 1.3. Section Moment: St. Venant's Warping Function

### Solid Section Torsion

- For a “pure twist” condition, due to **translational symmetry**,  $u_1$  can not depend on  $X_1$ . It also makes sense that  $u_1$  has to be proportional to the twist  $\theta$  somehow.
- Since  $\theta$  depends on  $X_1$ , but  $\theta_{,1}$  is a constant, St. Venant introduced a warping function  $\psi(X_2, X_3)$  such that

$$u_1 = \theta_{,1} \psi(X_2, X_3).$$

- Under this definition, the effective moment  $M_1$  can be given as,

$$M_1 = G \underbrace{\left( I_{11} + \int_{\Gamma} (\underline{X} \times \underline{n})_1 \psi d|s| \right)}_J \theta_{,1} = GJ \theta_{,1}.$$

- Also, The product  $GJ$  is also known as **Torsional Rigidity**

$$J = I_{11} + \int_{\mathcal{S}} X_2 \psi_{,3} - X_3 \psi_{,2} dA$$

## 1.4. Membrane Analogy

### Solid Section Torsion

- The governing equations in terms of Prandtl Stress function is

$$\phi_{,kk} + 2G\theta_{,1} = 0, \quad \phi = 0 \text{ on } \Gamma,$$

along with  $M_1 = 2 \int_S \phi dA$ .

# 1.4. Membrane Analogy

## Solid Section Torsion

- The governing equations in terms of Prandtl Stress function is

$$\phi_{,kk} + 2G\theta_{,1} = 0, \quad \phi = 0 \text{ on } \Gamma,$$

$$\text{along with } M_1 = 2 \int_S \phi dA.$$

### Transverse Deflections of a Membrane under Isotropic Linear Tension Density $T$ and Uniform Planar Load Density $P$

- The displacement field


$$u_1 = 0, \quad u_2 = 0, \quad u_3 = w(X_1, X_2)$$

- The strain Field

$$E_{11} = \frac{w_{,1}^2}{2}, \quad E_{22} = \frac{w_{,2}^2}{2}, \quad 2E_{12} = w_{,1}w_{,2}$$

- The Stress Field

$$\sigma_{11} = \frac{1}{t}T, \quad \sigma_{22} = \frac{1}{t}T.$$



## 1.4. Membrane Analogy

### Solid Section Torsion

- The governing equations in terms of Prandtl Stress function is

$$\phi_{,kk} + 2G\theta_{,1} = 0, \quad \phi = 0 \text{ on } \Gamma,$$

$$\text{along with } M_1 = 2 \int_S \phi dA.$$

### Transverse Deflections of a Membrane under Isotropic Linear Tension Density $T$ and Uniform Planar Load Density $P$

- The displacement field

$$u_1 = 0, \quad u_2 = 0, \quad u_3 = w(X_1, X_2)$$

- The strain Field

$$E_{11} = \frac{w_{,1}^2}{2}, \quad E_{22} = \frac{w_{,2}^2}{2}, \quad 2E_{12} = w_{,1}w_{,2}$$

- The Stress Field

$$\sigma_{11} = \frac{1}{t}T, \quad \sigma_{22} = \frac{1}{t}T.$$

- Strain Energy Density  
(Integrated over thickness)

$$\mathcal{U} = \frac{1}{2} (w_{,1}^2 + w_{,2}^2) T + Pw$$

- Equations of Motion <sup>a</sup>:

$$\frac{\partial}{\partial X_k} \frac{\partial \mathcal{U}}{\partial w_{,k}} - \frac{\partial \mathcal{U}}{\partial w} = 0:$$

$$T(w_{,11} + w_{,22}) - P = 0$$

<sup>a</sup>Euler-Ostrogradsky

## 1.4. Membrane Analogy

### Solid Section Torsion

- The governing equations in terms of Prandtl Stress function is

$$\phi_{,kk} + 2G\theta_{,1} = 0, \quad \phi = 0 \text{ on } \Gamma,$$

$$\text{along with } M_1 = 2 \int_S \phi dA.$$

### Transverse Deflections of a Membrane under Isotropic Linear Tension Density $T$ and Uniform Area-load $P$

- The displacement

$$u_1 = 0, \quad u_2 = 0$$

- The strain Field

$$E_{11} = \frac{w_{,1}^2}{2}, \quad E_{22} = \frac{w_{,2}^2}{2}, \quad 2E_{12} = w_{,1}w_{,2}$$

- The Stress Field

$$\sigma_{11} = \frac{1}{t}T, \quad \sigma_{22} = \frac{1}{t}T.$$

The governing equations, therefore, are identical to that of a membrane undergoing deformation under the action of a uniform area-load  $P$ .

Energy Density (integrated over thickness)

$$= \frac{1}{2} (w_{,1}^2 + w_{,2}^2) T + Pw$$

- Equations of Motion <sup>a</sup>:

$$\frac{\partial}{\partial X_k} \frac{\partial U}{\partial w_{,k}} - \frac{\partial U}{\partial w} = 0:$$

$$T(w_{,11} + w_{,22}) - P = 0$$

<sup>a</sup>Euler-Ostrogradsky

# 1.4. Membrane Analogy: Governing Equations of $u_1$ (Warping)

## Solid Section Torsion

- The governing equations in terms of  $u_1$  is the **Laplace equation**:

$$u_{1,kk} = 0,$$

and its boundary conditions (**Neumann B.C.s**) are written as (again based on zero traction at free end:

$$\begin{aligned} G \langle (u_{1,2} - X_3 \theta_{,1}) \underline{e}_2 + (u_{1,3} + X_2 \theta_{,1}) \underline{e}_3, \underline{e}_n \rangle &= 0 \\ \implies \langle u_{1,2} \underline{e}_2 + u_{1,3} \underline{e}_3, X_{2,n} \underline{e}_2 + X_{3,n} \underline{e}_3 \rangle & \\ - \theta_{,1} \langle X_3 \underline{e}_2 - X_2 \underline{e}_3, -X_{3,s} \underline{e}_2 + X_{2,s} \underline{e}_3 \rangle &= 0 \\ \implies \boxed{u_{1,n} = -\frac{\theta_{,1}}{2} \frac{d}{ds} (X_2^2 + X_3^2)} &= -\theta_{,1} \left( \underbrace{X_3}_{-n_2} X_{2,n} - X_2 \underbrace{X_{3,n}}_{-n_3} \right). \end{aligned}$$

# 1.4. Membrane Analogy: Governing Equations of $u_1$ (Warping)

Solid Section Torsion

- The governing equation

**Note:** We have used two different representations of  $\underline{e}_n$  here:

$$\underline{e}_n = X_{2,n}\underline{e}_2 + X_{3,n}\underline{e}_3, \text{ and}$$

$$\underline{e}_n = -X_{3,s}\underline{e}_2 + X_{2,s}\underline{e}_3.$$

and its boundary condition based on zero traction

Also, we are representing the **outward normal** as

$$\hat{n} = n_2\underline{e}_2 + n_3\underline{e}_3 = -\underline{e}_n.$$

boundary equation:

are written as (again

$$\begin{aligned} & G \langle (u_{1,2} - \theta_{,1} X_{3,s} e_2 - X_{2,s} e_3, -X_{3,s} e_2 + X_{2,s} e_3) \rangle = 0 \\ \Rightarrow \langle u_{1,2} e_2 + \theta_{,1} (X_{3,s} e_2 - X_{2,s} e_3), -X_{3,s} e_2 + X_{2,s} e_3 \rangle &= 0 \end{aligned}$$

$$\Rightarrow u_{1,n} = -\frac{\theta_{,1}}{2} \frac{d}{ds} (X_2^2 + X_3^2) = -\theta_{,1} \left( \underbrace{X_3}_{-n_2} X_{2,n} - X_2 \underbrace{X_{3,n}}_{-n_3} \right).$$

# 1.4. Membrane Analogy

## Solid Section Torsion

### Equations in the Stress Function

$$\begin{aligned}\nabla^2 \phi &= -2G\theta_{,1}, \\ \phi &= 0 \text{ on } \Gamma, \\ M_1 &= 2 \int_S \phi dA.\end{aligned}$$

### Equations in Warping

$$\begin{aligned}\nabla^2 u_1 &= 0, \\ \frac{\partial u_1}{\partial n} &= \theta_{,1} (X_3 n_2 - X_2 n_3) \text{ on } \Gamma. \\ M_1 &= GJ\theta_{,1}\end{aligned}$$

### Relating the two

- Once we find  $\phi$ , we can integrate the following to get  $u_1$ :

$$\begin{aligned}\frac{1}{G}\phi_{,3} &= u_{1,2} - X_3\theta_{,1} \\ -\frac{1}{G}\phi_{,2} &= u_{1,3} + X_2\theta_{,1}\end{aligned}$$



# 1.4. Membrane Analogy

Solid Section Torsion

## Equations in the Stress Function

$$\begin{aligned}\nabla^2 \phi &= -2G\theta_{,1}, \\ \phi &= 0 \text{ on } \Gamma, \\ M_1 &= 2 \int_S \phi dA.\end{aligned}$$

## Equations in Warping

$$\begin{aligned}\nabla^2 u_1 &= 0, \\ \frac{\partial u_1}{\partial n} &= \theta_{,1} (X_3 n_2 - X_2 n_3) \text{ on } \Gamma. \\ M_1 &= GJ\theta_{,1}\end{aligned}$$

## Relating the two

- Once we find  $\phi$ , we can integrate the following to get  $u_1$ :

$$\begin{aligned}\frac{1}{G}\phi_{,3} &= u_{1,2} - X_3\theta_{,1} \\ -\frac{1}{G}\phi_{,2} &= u_{1,3} + X_2\theta_{,1}\end{aligned}$$

If interested, you can see the FreeFem scripts in the website for numerical implementations of these. You need to know just a little bit about weak forms to understand the code, it is very straightforward.

(not for exam)

## 1.5. Tutorial: Elliptical Section

### Solid Section Torsion

- Let us consider an elliptical section and choose the stress function as

$$\phi = C \left( \frac{X_2^2}{a^2} + \frac{X_3^2}{b^2} - 1 \right).$$

- The Laplacian of  $\phi$  evaluates as,

$$\nabla^2 \phi = 2C \left( \frac{1}{a^2} + \frac{1}{b^2} \right) = -2G\theta_{,1} \implies C = -G\theta_{,1} \frac{a^2 b^2}{a^2 + b^2}.$$

- Let us first compute the total resultant twisting moment  $M_1$  that this represents:

$$M_1 = 2 \int_S \phi = 2C \left( \frac{1}{a^2} \int_S \overbrace{X_2^2}^{\frac{\pi a^3 b}{4}} dA + \frac{1}{b^2} \int_S \overbrace{X_3^2}^{\frac{\pi a b^3}{4}} dA - \int_S \overbrace{dA}^{\pi ab} \right) = -C\pi ab$$

$$M_1 = G \frac{\pi a^3 b^3}{a^2 + b^2} \theta_{,1}.$$

## 1.5. Tutorial: Elliptical Section

### Solid Section Torsion

- Let us consider an elliptical section and choose the stress function as

$$\phi = C \left( \frac{X_2^2}{a^2} + \frac{X_3^2}{b^2} - 1 \right).$$

- The Laplacian of  $\phi$  evaluates as,

$$\nabla^2 \phi = 2C \left( \frac{1}{a^2} + \frac{1}{b^2} \right) = -2G\theta_{,1} \implies C = -G\theta_{,1} \frac{a^2 b^2}{a^2 + b^2}.$$

- Let us first compute the total resultant twisting moment  $M_1$  that this represents:

$$M_1 = 2 \int_S \phi = 2C \left( \frac{1}{a^2} \int_S \overbrace{X_2^2}^{\frac{\pi a^3 b}{4}} dA + \frac{1}{b^2} \int_S \overbrace{X_3^2}^{\frac{\pi a b^3}{4}} dA - \int_S \overbrace{dA}^{\pi ab} \right) = -C\pi ab$$

The torsional rigidity reads,

$$M_1 = G \frac{\pi a^3 b^3}{a^2 + b^2} \theta_{,1}$$

$$GJ = G \frac{\pi a^3 b^3}{a^2 + b^2}$$

# 1.5. Tutorial: Elliptical Section

## Solid Section Torsion

- For the axial deflection we have two equations (by equating shear stress expressions),

$$u_{1,2} = \theta_{,1}\psi_{,2} = -\frac{2a^2}{a^2 + b^2}\theta_{,1}X_3 + \theta_{,1}X_3 = -\frac{a^2 - b^2}{a^2 + b^2}\theta_{,1}X_3$$

$$u_{1,3} = \theta_{,1}\psi_{,3} = \frac{2b^2}{a^2 + b^2}\theta_{,1}X_2 - \theta_{,1}X_2 = -\frac{a^2 - b^2}{a^2 + b^2}\theta_{,1}X_2$$

- Integrating them separately we have,

$$u_1 = -\frac{a^2 - b^2}{a^2 + b^2}\theta_{,1}X_2 + f_1(X_3)$$

$$= -\frac{a^2 - b^2}{a^2 + b^2}\theta_{,1}X_2 + f_2(X_2)$$


- $f_1$  and  $f_2$  **have to be constant**. Setting it to zero we have,

$$u_1 = -\frac{a^2 - b^2}{a^2 + b^2}\theta_{,1}X_2X_3 = -\frac{a^2 - b^2}{G\pi a^3 b^3}M_1X_2X_3.$$


# 1.5. Tutorial: Elliptical Section

Solid Section Torsion

## Stress Function

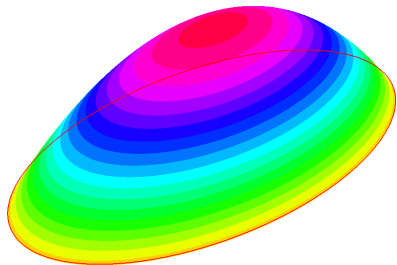


## Section Warping




# 1.5. Tutorial: Elliptical Section

## Solid Section Torsion

### Stress Function

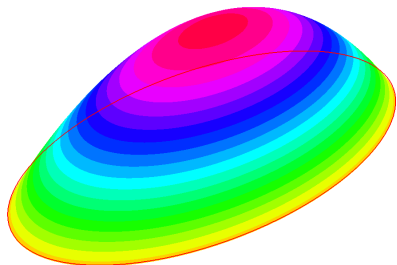

### Section Warping




## General Sections

- Torsion is amenable to analysis when the solid section boundary can be expressed in closed form **AND** its Laplacian evaluates to a constant. (See Chapter 9 in [1])
- Every assumed form of  $\phi$  will give us a warping field. For an application wherein the section warping is also constrained, **this solution is not exact**. (St. Venant's principle can be invoked, however).
- Several analytical techniques exist (check [1] and references therein).
- Fully numerical approaches are also possible, see the FreeFem scripts in the website.

# 1.5. Tutorial: Elliptical Section: Results in 3D

Solid Section Torsion

Here is a 3D FE Result.  
(Salome\_Meca HDF Files in website)

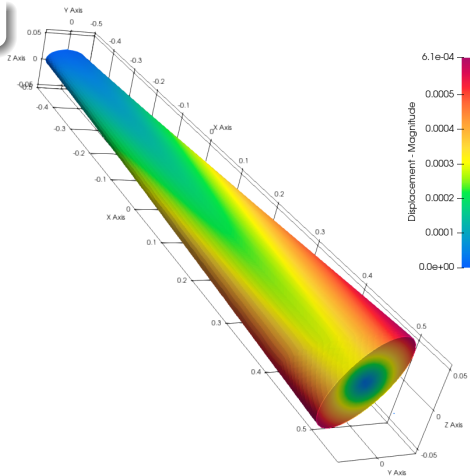



**CODE aster**  
salome\_meca 2023

# 1.5. Tutorial: Elliptical Section: Results in 3D

Solid Section Torsion

Here is a 3D FE Result.  
(Salome\_Meca HDF Files in website)

## Mid-Section Warping

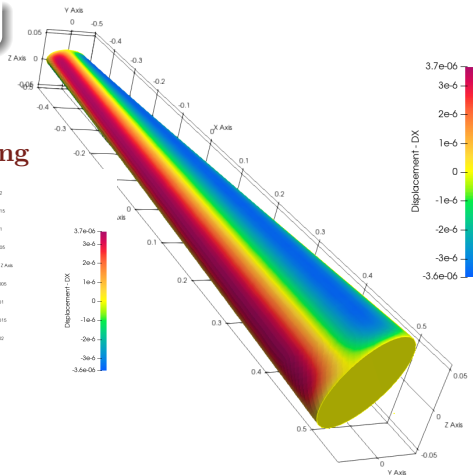


CODE aster  
salome\_meca 2023




# 1.5. General Sections

Solid Section Torsion

## Square Section

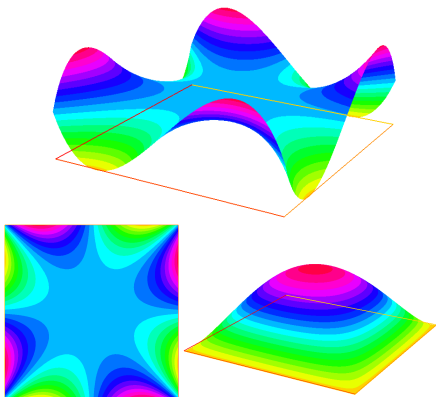


## Triangular Section

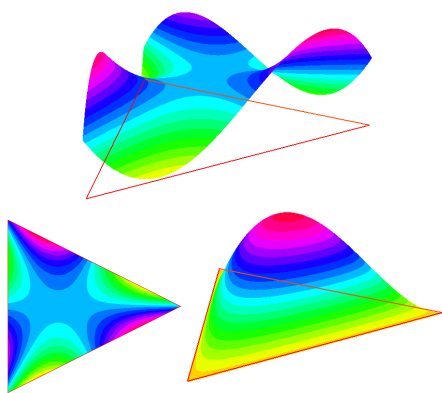


# 1.5. General Sections

Solid Section Torsion


Square Section

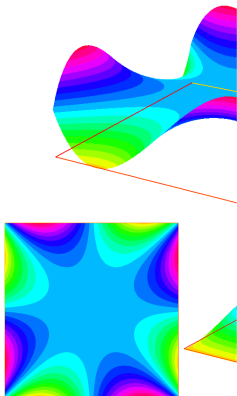

An Arbitrary Hand-drawn Section

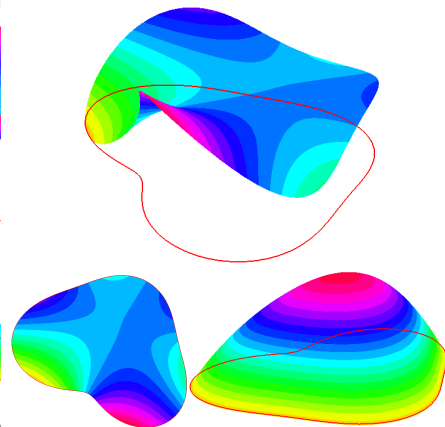

on







# 1.5. General Sections

## Solid Section Torsion

### Sections with Holes

#### Square Sec


The validity of the governing equations extend beyond singly connected sections. Nothing stops us from applying it for multiply connected sections also for the warping formulation. (Some additional considerations necessary for the stress function, see sec. 9.3.3 in [1]).



# 1.6. Rectangular Sections

## Solid Section Torsion


- Rectangular sections are slightly more involved, in general. But an important simplification is achieved for thin sections.
- Let us look at some numerical results for motivation (FreeFem code `b_rectangle.edp`).

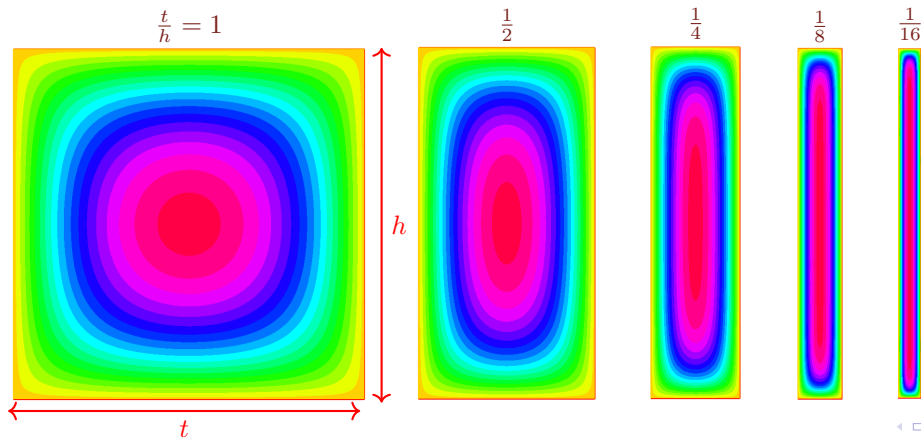


# 1.6. Rectangular Sections


## Solid Section Torsion

- Rectangular sections are an important case
- Let us look at the shear stress distribution in a rectangular section
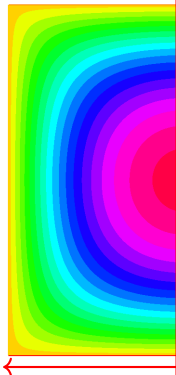
$$\frac{t}{h}$$


For the thin cases, we will approximate the shear function as



$$\approx$$


This will form the basis for the study of thin sections.

But an

Fem code

$$\frac{1}{8}$$


$$\frac{1}{16}$$


# 1.6. Rectangular Sections: Thin Strip Idealization

## Solid Section Torsion

- Idealizing the rectangle as a “strip” ( $t/h$  is very small), we can write the stress function Poisson problem as,

$$\phi_{,22} = -2G\theta', \quad \text{with } \phi = 0 \text{ at } X_2 \in \left\{-\frac{t}{2}, \frac{t}{2}\right\}, X_3 \in \left\{-\frac{h}{2}, \frac{h}{2}\right\},$$

solved by  $\phi(X_2, X_3) = -G\theta' \left( X_2^2 - \left(\frac{t}{2}\right)^2 \right)$ .

- This implies the following shear stress and resultant moment:

$$\sigma_{12} = \overbrace{0}^{\phi_{,3}}, \quad \sigma_{13} = \overbrace{2GX_2\theta'}^{-\phi_{,2}}, \quad M_1 = 2 \int_{\mathcal{S}} \phi dA = G \overbrace{\frac{ht^3}{3}}^J \theta'.$$

- The shear strain is  $\gamma_{13} = u_{1,3} + u_{3,1} = u_{1,3} + X_2\theta_{,1}$ , which implies


$$u_1 = \theta' X_2 X_3 \text{ as the warping field (setting integration constant to zero).}$$

# 1.6. Rectangular Sections: Thin Strip Idealization

## Solid Section Torsion

- Idealizing the rectangle as a “strip” ( $t/h$  is very small), we can write the stress

### Warping Profile

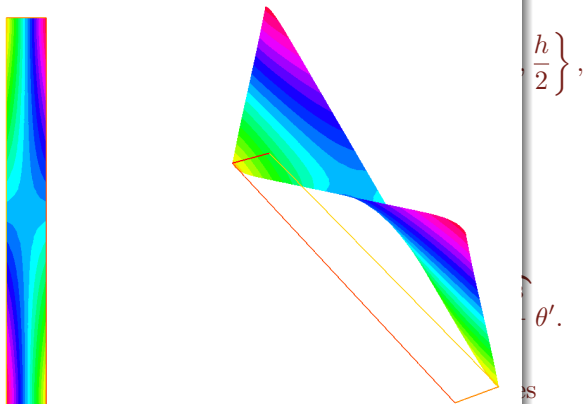

solve

- This

- The

$u_1 = \theta' X_2 X_3$  as the warping field (setting integration constant to zero).

## 2. Torsion of Thin-Walled Sections

- Using the same notation as in Module 4, the equilibrium equations, for a thin-walled section undergoing pure torsion ( $\sigma_{11} = \sigma_{ss} = \sigma_{nn} = \sigma_{sn} = 0$ ) can be written as

$$\cancel{\sigma_{11,1}}^0 + \sigma_{1s,s} = 0, \quad \sigma_{1s,1} = 0.$$

- This implies, when in “pure torsion”,  $\sigma_{1s,s}$  is constant along the section arc.
- Since  $q(s) = \int \sigma_{1s,s} dX_n$ , this shows that **shear flow is constant across the section when it is under pure torsion.**
- The resultant moment of a shear flow distribution  $q(s)$  can be given by

$$M_1 = \int_S \underline{X} \times (q(s) d\underline{s}) = q \int_S p ds,$$

where  $p$  is the perpendicular distance to the point on the skin under consideration.



## 2. Torsion of Thin-Walled Sections

- Using the same notation as in Module 4, the equilibrium equations, for a thin-walled section undergoing pure torsion ( $\sigma_{11} = \sigma_{ss} = \sigma_{nn} = \sigma_{sn} = 0$ ) can be written as

An important simplification occurs when  $\mathcal{S}$  is a *closed section*. This leads to the **Bredt-Batho Formula**:

- This implies,  $\int \sigma_{1s,s} d\mathcal{A}_n = 0$  along the section arc.

$$M_1 = 2\mathcal{A}q.$$

- Since  $q(s) = \int \sigma_{1s,s} d\mathcal{A}_n$ , this shows that **shear flow is constant across the section when it is under pure torsion.**
- The resultant moment of a shear flow distribution  $q(s)$  can be given by

$$M_1 = \int_{\mathcal{S}} \underline{X} \times (q(s) d\mathbf{s}_s) = q \int_{\mathcal{S}} p ds,$$

where  $p$  is the perpendicular distance to the point on the skin under consideration.

## 2.1. Transformation of Displacement Field to Skin-local Coordinates


## Torsion of Thin-Walled Sections

We will consider the bending-torsion combined displacement field:

$$u_2 = v - X_3\theta$$

$$u_3 = w + X_3\theta,$$

and transform this to the **skin local coordinate system**.



- The section displacement field transforms as,

$$\begin{aligned} \begin{bmatrix} u_s \\ u_n \end{bmatrix} &= \begin{bmatrix} X_{2,s} & X_{3,s} \\ X_{2,n} & X_{3,n} \end{bmatrix} \begin{bmatrix} u_2 \\ u_3 \end{bmatrix} \\ &= \begin{bmatrix} X_{3,n} & -X_{2,n} \\ -X_{3,s} & X_{2,s} \end{bmatrix} \begin{bmatrix} u_2 \\ u_3 \end{bmatrix}. \end{aligned}$$

- The **tangential component** of displacement along the boundary  $\Gamma$  can be written as,

$$\begin{aligned} u_s &= X_{2,s}(v - X_3\theta) + X_{3,s}(w + X_2\theta) \\ &= X_{2,s}v + X_{3,s}w + \theta \underbrace{(X_{3,s}X_2 - X_{2,s}X_3)}_{-X_n=p} \end{aligned}$$

$$\Rightarrow \boxed{u_s = p\theta + vX_{2,s} + wX_{3,s}}$$

## 2.1. Transformation of Displacement Field to Skin-local Coordinates

### Torsion of Thin-Walled Sections

- The transformed displacement field combining bending and torsion is:

$$\left. \begin{aligned} u_1 &= -X_3v' - X_2w' + \theta'\psi \\ u_2 &= v - X_3\theta \\ u_3 &= w + X_2\theta \end{aligned} \right\} \implies \begin{aligned} u_1 &\text{ (unchanged)} \\ u_s &= p\theta + vX_{2,s} + wX_{3,s} \\ u_n &= X_s\theta - vX_{3,s} + wX_{2,s} \end{aligned}$$

- The shear strain along a thin section between the  $\underline{e}_1$ ,  $\underline{e}_s$  directions is

$$\gamma_{1s} = u_{1,s} + u_{s,1} = u_{1,s} + p\theta' + X_{2,s}v' + X_{3,s}w' = \frac{\tau}{G} = \frac{q(s)}{Gt}.$$

- Integrating this over the skin, we get

$$\begin{aligned} \int_0^s \frac{q(x)}{Gt} dx &= (u_1(s) - u_1(0)) + \theta' \int_0^s p dx + v' \int_0^s X_{2,x} dx + w' \int_0^s X_{3,x} dx \\ &= (u_1(s) - u_1(0)) + \theta' 2\mathcal{A}_{O_s}(s) + v'(X_2(s) - X_2(0)) + w'(X_3(s) - X_3(0)). \end{aligned}$$

- Over a **completely closed section** we have,

$$\oint \frac{q(s)}{Gt} ds = 2\mathcal{A}\theta'$$

## 2.2. Closed Sections: Bredt-Batho Theory

### Torsion of Thin-Walled Sections

- For closed sections under *pure torsion*, we will set  $v = w = 0$ .
- So  $q$  is constant over the section and is written with the *Bredt-Batho Formula* based on the resultant twisting moment  $M_1$  as

$$M_1 = 2\mathcal{A}q \implies q = \frac{M_1}{2\mathcal{A}}.$$

- The shear flow integral reads,

$$q \underbrace{\int_0^s \frac{1}{Gt} dx}_{\delta_{Os}(s)} = (u_1(s) - u_1(0)) + \theta' \underbrace{\int_0^s p dx}_{2\mathcal{A}_{Os}(s)}.$$

For the whole section, this becomes

$$q \oint \frac{1}{Gt} ds = \theta' 2\mathcal{A} \implies \theta' = \frac{q}{2\mathcal{A}} \oint \frac{1}{Gt} ds.$$

- So we can write the warping as

$$u_1(s) - u_1(0) = \overbrace{\frac{M_1 \delta}{2\mathcal{A}}}^{q\delta} \left( \frac{\delta_{Os}(s)}{\delta} - \frac{\mathcal{A}_{Os}(s)}{\mathcal{A}} \right)$$

## 2.2. Closed Sections: Bredt-Batho Theory

### Torsion of Thin-Walled Sections

- For closed sections under *pure torsion*, we will set  $v = w = 0$ .
- So  $q$  is constant over the section and is written with the *Bredt-Batho Formula* based on the resultant twisting moment  $M_1$  as

$$M_1 = 2Aa \implies a = \frac{M_1}{2A}$$

- The integration constant  $u_1(0)$  can be found by enforcing  $\sigma_{11} = 0$  on the section after assuming  $\sigma_{11} \propto u_1$ . So  $\oint u_1(s) ds = 0$  in the section, leading to:

$$u_1(0) = \frac{\oint u_{10}(s) t ds}{\oint t ds},$$

F

where  $u_{10}(s)$  is the warping distribution assuming  $u_1(0) = 0$ .

- So we can write the warping as

$$u_1(s) - u_1(0) = \overbrace{\frac{M_1 \delta}{2A}}^{q\delta} \left( \frac{\delta_{Os}(s)}{\delta} - \frac{\mathcal{A}_{Os}(s)}{A} \right)$$

## 2.2. Closed Sections: Bredt-Batho Theory

### Torsion of Thin-Walled Sections

- For closed sections under *pure torsion*, we will set  $v = w = 0$ .
- So  $q$  is constant over the section and is written with the *Bredt-Batho Formula* based on the resultant twisting moment  $M_1$  as

$$M_1 = 2\mathcal{A}q \implies q = \frac{M_1}{2\mathcal{A}}.$$

- The shear flow integral reads,

$$q \underbrace{\int_0^s \frac{1}{Gt} dx}_{\delta_{O_s}(s)} = (u_1(s) - u_1(0)) + \theta' \underbrace{\int_0^s p dx}_{2\mathcal{A}_{O_s}(s)}.$$

For the whole section, this becomes

$$q \oint \frac{1}{Gt} ds = \theta' 2\mathcal{A} \implies \theta' = \frac{q}{2\mathcal{A}} \oint \frac{1}{Gt} ds.$$

- So we can write the warping as

$$u_1(s) - u_1(0) = \overbrace{\frac{M_1 \delta}{2\mathcal{A}}}^{q\delta} \left( \frac{\delta_{O_s}(s)}{\delta} - \frac{\mathcal{A}_{O_s}(s)}{\mathcal{A}} \right)$$

## 2.2. Closed Sections: Bredt-Batho Theory

### Torsion of Thin-Walled Sections

- For closed sections under *pure torsion*, we will set  $v = w = 0$ .

- Combining these two, we get the torsional rigidity: is written with the *Bredt-Batho* twisting moment  $M_1$  as

$$M_1 = 2\mathcal{A}q$$

$$\Rightarrow q = \frac{M_1}{2\mathcal{A}}$$

$$= \frac{4A^2}{\delta}\theta'$$

$$= u_1(0) + \underbrace{\theta' \int_0^s pdx}_{2\mathcal{A}_{O_s}(s)}$$

For constant  $G, t$ , we get,

$$M_1 = \frac{4A^2}{|\Gamma|}Gt\theta' = GJ\theta'$$

$$\Rightarrow \boxed{J = \frac{4tA^2}{|\Gamma|}}$$

$$\Rightarrow \theta' = \frac{q}{2\mathcal{A}} \oint \frac{1}{Gt} ds.$$

$|\Gamma|$  is the section circumference.

$$\left( \frac{\delta_{O_s}(s)}{\delta} - \frac{\mathcal{A}_{O_s}(s)}{\mathcal{A}} \right)$$

## 2.2. Closed Sections: The Neuber Beam

### Torsion of Thin-Walled Sections

- A natural question arises: what should I do if I want to minimize/eliminate warping?
- We want to set  $u_1(s) - u_1(0) = 0, \forall s \in \Gamma$ . This implies:

$$\frac{\delta_{O_s}(s)}{\delta} = \frac{\mathcal{A}_{O_s}(s)}{\mathcal{A}},$$

which is satisfied iff

$$\frac{1}{\delta} \underbrace{\frac{d\delta_{O_s}(s)}{ds}}_1 = \frac{p}{2\mathcal{A}}.$$

- This implies that the quantity  $pGt$  (modulus as well as thickness can vary along section) has to be a constant:

$$pGt = \frac{2\mathcal{A}}{\delta}.$$

- It is known as a **Neuber Beam** if this is satisfied. (eg., circular sections)



## 2.2. Closed Sections: The Shear Center

### Torsion of Thin-Walled Sections

- Based on relating the kinematics to stress (through linear elastic constitutive relationships), we have written the shear flow integral as:

$$\oint \frac{q(s; \xi_2, \xi_3)}{Gt} ds = 2A\theta'$$

- Suppose, for a closed section, we evaluated the shear flow by the approach in Module 4. **Recall** that we required the resultant moment  $M_1$  to be zero for this:

$$\oint p \overbrace{(q_b(s; \xi_2, \xi_3) + q_0(\xi_2, \xi_3))}^{q(s; \xi_2, \xi_3)} ds = 0.$$

- We can not take it for granted that the section does not twist when no moment is applied. So we add this additional consideration in our definition of shear center. We posit that **the resultant twist angle must also be zero** when the shear resultants act along the shear center:

$$\theta' = 0 \implies \oint \frac{q_b(s; \xi_2, \xi_3) + q_0(\xi_2, \xi_3)}{Gt} ds = 0$$

- Considering  $V_2, V_3$  separately, we can get 3 equations in the 3 unknowns and can solve it.

## 2.2. Closed Sections: The Shear Center

### Torsion of Thin-Walled Sections

One possible sequence of analysis is this (for shear):

- ① We choose some convenient point as origin, say  $\mathcal{O}$ .
- ② We first obtain the “baseline” shear flow  $q_b(s)$  using some arbitrary starting point for the shear flow integral.
- ③ We estimate  $q_0$  by requiring zero twist:

$$\oint \frac{q_b(s) + q_0}{Gt} ds = 0 \implies \boxed{q_0 = -\frac{\oint \frac{q_b(s)}{Gt} ds}{\oint \frac{1}{Gt} ds}}$$

- ④ We write down the resultant moment as

$$\oint p(q_b(s) + q_0(s)) ds = V_2(-\xi_3) + V_3(\xi_2).$$

The shear center coordinates  $(\xi_2, \xi_3)$  are estimated by comparing the coefficients of  $V_2$  &  $V_3$  in the above.

## 2.2. Closed Sections: The Shear Center

### Torsion of Thin-Walled Sections

One possible sequence of analysis is this (for shear):

- ① We choose some convenient point as origin, say  $\mathcal{O}$ .
- ② We first obtain the “baseline” shear flow  $q_b(s)$  using some arbitrary starting point for the shear flow integral.
- ③ We estimate  $q_0$

**Question:** We never required the zero twist condition for open sections. Does this mean open sections can undergo twisting even when  $M_1 = 0$ ?

$$\frac{\oint \frac{q_b(s)}{Gt} ds}{\oint \frac{1}{Gt} ds}$$

- ④ We write down the resultant moment as


$$\oint p(q_b(s) + q_0(s)) ds = V_2(-\xi_3) + V_3(\xi_2).$$

The shear center coordinates  $(\xi_2, \xi_3)$  are estimated by comparing the coefficients of  $V_2$  &  $V_3$  in the above.

## 2.2. Closed Sections: Tutorial on Rectangular Closed Sections

### Torsion of Thin-Walled Sections

- Consider this rectangular Section:



- We will write out the warping quantity

$$\frac{1}{2\mathcal{A}\theta'}(u(s) - u(0)) = \frac{\delta_{OS}(s)}{\delta} - \frac{\mathcal{A}_{OS}(s)}{\mathcal{A}} \text{ as a table in the following fashion:}$$

Section	$\delta_{OS}(s)$	$\mathcal{A}_{OS}(s)$	$\frac{\delta_{OS}(s)}{\delta} - \frac{\mathcal{A}_{OS}(s)}{\mathcal{A}}$	$\frac{1}{2\mathcal{A}\theta'}(u_{end} - u_{start})$
A $\rightarrow$ B	$\frac{\frac{a}{2} - X_2}{Gt}$	$\frac{b}{4}\left(\frac{a}{2} - X_2\right)$	$\frac{a-b}{4a(a+b)}\left(\frac{a}{2} - X_2\right)$	$\frac{a-b}{4(a+b)}$
B $\rightarrow$ C	$\frac{\frac{b}{2} - X_3}{Gt}$	$\frac{a}{4}\left(\frac{b}{2} - X_3\right)$	$-\frac{a-b}{4b(a+b)}\left(\frac{b}{2} - X_3\right)$	$-\frac{a-b}{4a(a+b)}$
C $\rightarrow$ D	$\frac{\frac{a}{2} + X_2}{Gt}$	$\frac{b}{4}\left(\frac{a}{2} + X_2\right)$	$\frac{a-b}{4a(a+b)}\left(\frac{a}{2} + X_2\right)$	$\frac{a-b}{4a(a+b)}$
D $\rightarrow$ A	$\frac{\frac{b}{2} + X_3}{Gt}$	$\frac{a}{4}\left(\frac{b}{2} + X_3\right)$	$-\frac{a-b}{4a(a+b)}\left(\frac{b}{2} + X_3\right)$	$-\frac{a-b}{4a(a+b)}$


## 2.2. Closed Sections: Tutorial on Rectangular Closed Section

### Torsion of Thin-Walled Sections

- Letting  $u_A$  be some constant, we have the following:

$$u_B = u_A + 2\mathcal{A}\theta' \frac{a-b}{4(a+b)}, \quad u_C = u_A, \quad u_D = u_A + 2\mathcal{A}\theta' \frac{a-b}{4(a+b)}.$$

- In each member, the warping function is distributed linearly in each member such that the warped shape looks like:



Figures from [2]

- Imposing zero net translation of section we get,

$$\oint u(s)ds = u_A 2(a+b) + \frac{a-b}{4} := 0 \implies u_A = -\frac{a-b}{8(a+b)}.$$


## 2.2. Closed Sections: Tutorial on Rectangular Closed Section

### Torsion of Thin-Walled Sections

- Letting  $u_A$  be some constant, we have the following:

$$u_B = u_A + 2\mathcal{A}\theta' \frac{a-b}{4(a+b)}, \quad u_C = u_A, \quad u_D = u_A + 2\mathcal{A}\theta' \frac{a-b}{4(a+b)}.$$

- In each member, the warping function is distributed linearly in each member such that the warped shape looks like:



Figures from [2]

- Imposing zero net translation of section we get,

$$\oint u(s)ds = u_A 2(a+b) + \frac{a-b}{4} := 0 \implies u_A = -\frac{a-b}{8(a+b)}.$$

## 2.3. Open Sections

### Torsion of Thin-Walled Sections

- We will invoke the thin-strip idealization for this. The main results from the idealization are:

$$\phi = -G\theta' \left( X_2^2 - \frac{t^2}{4} \right); \quad M_1 = G \frac{ht^3}{3} \theta';$$

$$\sigma_{12} = 0, \quad \sigma_{13} = 2GX_2\theta', \quad u_1 = \theta' X_2 X_3.$$

- For general thin-walled sections, the torsion constant  $J$  is generalized as,

$$J = \frac{1}{3} \int_{\mathcal{S}} t^3 ds, \quad \text{s.t.} \quad M_1 = GJ\theta'.$$

## 2.3. Open Sections: Warping

### Torsion of Thin-Walled Sections

- Along the centerline  $\sigma_{1n} = \sigma_{1s} = 0$  (**Note:** shear flow is zero under the idealization!). So we have (on the centerline),

$$\gamma_{1s} = 0 = u_{1,s} + u_{s,1} = u_{1,s} + p\theta',$$

where  $p$  is the perpendicular distance to the point on the skin. This can be integrated to

$$u_1(s) - u_1(0) = -\theta' \int_0^s p ds = -2\theta' \mathcal{A}_{O_s}(s).$$

- $u_1(0)$  can be fixed based on enforcing the zero straight-stress ( $\sigma_{11} = 0$ ,  $\sigma_{11} \propto u_1$ ) assumption which leads to

$$\int_{\Gamma} u_1(s) ds = 0 \implies u_1(0) = \frac{1}{|\Gamma|} 2\theta' \int_{\Gamma} \mathcal{A}_{O_s}(s) ds.$$

$|\Gamma|$  is the total *circumference*.



## 2.3. Open Sections

### Torsion of Thin-Walled Sections

- For points off of the centerline, we consider  $\sigma_{1n} = 0$ , which implies,

$$\gamma_{1n} = u_{1,n} + u_{n,1} = u_{1,n} + s\theta' = 0 \implies u_{1,n} = -s\theta',$$

where  $s$  is the position of the point along the skin (measured relative to the central line).

- This can be integrated to

$$u_1 = -\theta'ns + u_1(n=0),$$

where  $n$  is the position with respect to the centerline along  $\underline{e}_n$ .

- $u_1(n=0) = u_0 - 2\theta' \mathcal{A}_{O_s}(s)$  from the centerline considerations above.

## 2.3. Open Sections

### Torsion of Thin-Walled Sections

- In summary, the warping can be written in terms of section-local coordinates as,

$$u_1 = u_0 - \underbrace{2\mathcal{A}_{O_s}(s)\theta'}_{u_1(n=0)} - \theta'ns .$$

- The first term in the above, representing center-line warping, is known as **primary warping**, and the second term, representing section warping, is known as **secondary warping**.
- For sufficiently thin sections, the latter is usually neglected.

## 2.3. Open Sections

### Torsion of Thin-Walled Sections

- Let us illustrate the above with exact (numerical) results for a C-section.

**Recall the C-Section from Module 4**

$$I_{22} \approx \frac{(h^3 + 6bh^2)t}{12} + \mathcal{O}(t^2)$$

$$q_{BA}(X_2) = -\frac{htV_3}{2I_{22}}(b - X_2)$$

$$q_{AC}(X_3) = -\frac{htV_3}{2I_{22}}\left(b + \frac{h}{4}\right) + \frac{tV_3}{2I_{22}}X_3^2$$

$$q_{CD}(X_2) = -\frac{htV_3}{2I_{22}}(b - X_2)$$



$$M_1 = \oint pqds = -\frac{b^2h^2tV_3}{4I_{22}} := -V_3\xi_s$$

$$\xi_s \approx \frac{3b^2}{h + 6b} + \mathcal{O}(t)$$

## 2.3. Open Sections

### Torsion of Thin-Walled Sections



- Let us illustrate the above with exact (numerical) results for a C-section.

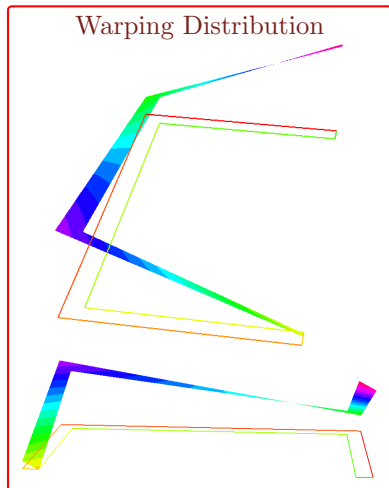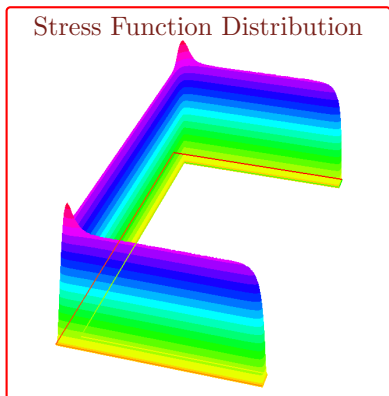

## 2.3. Open Sections

### Torsion of Thin-Walled Sections

- Let us illustrate the above with exact (numerical) results for a C-section.

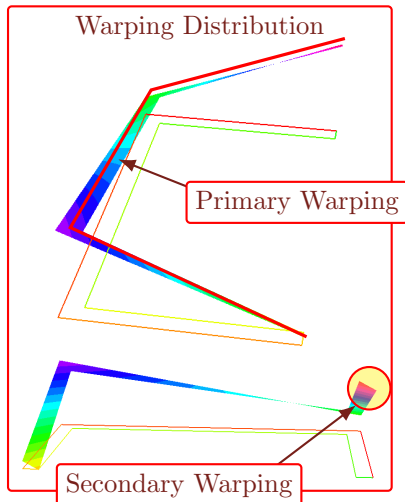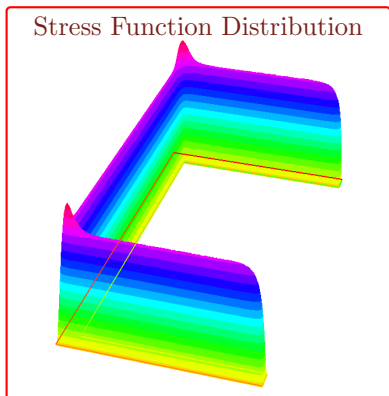

## 2.4. Combined Cells

### Torsion of Thin-Walled Sections

- It is instructive to now take stock of what we have obtained so far. The moment-twist relationship is generically written by

$$M_1 = GJ\theta',$$

with  $J$  being the torsion constant.

#### Solid Sections

$$J = I_{11} + \int_S x_2 \psi_{,3} - x_3 \psi_{,2} dA$$

#### Closed Sections

$$J = \frac{4tA^2}{|\Gamma|}$$

#### Open Sections

$$J = \frac{t^3 |\Gamma|}{3}$$

## 2.4. Combined Cells

### Torsion of Thin-Walled Sections

- It is instructive to now take stock of what we have obtained so far. The moment-twist relationship is generically written by

$$M_1 = GJ\theta',$$

with  $J$  being the torsion constant.

#### Solid Sections

$$J = I_{11} + \int_S x_2 \psi_{,3} - x_3 \psi_{,2} dA$$

#### Closed Sections

$$J = \frac{4tA^2}{|\Gamma|}$$

#### Open Sections

$$J = \frac{t^3 |\Gamma|}{3}$$

Let us consider the implications on a **Circular Section** of radius  $R$ .

**Solid Section**  $J_s = I_{11} = \frac{\pi R^4}{2}$ .

**Closed Section**  $J_c = \frac{4t \times (\pi R^2)^2}{2\pi R} = 2\pi R^3 t$

**Open Section**  $J_o = \frac{t^3}{3} 2\pi R = \frac{2\pi}{3} R t^3$

## 2.4. Combined Cells

### Torsion of Thin-Walled Sections

- It is instructive to now take stock of what we have obtained so far. The moment-twist relationship is generically written by

$$M_1 = GJ\theta',$$

with  $J$  being the torsion constant.

#### Solid Sections

$$J = I_{11} + \int_S x_2 \psi_{,3} - x_3 \psi_{,2} dA$$

#### Closed Sections

$$J = \frac{4tA^2}{|\Gamma|}$$

#### Open Sections

$$J = \frac{t^3 |\Gamma|}{3}$$

Let us consider the implications on a **Circular Section** of radius  $R$ .

**Solid Section**  $J_s = I_{11} = \frac{\pi R^4}{2}$ .

**Closed Section**  $J_c = \frac{4t \times (\pi R^2)^2}{2\pi R} = 2\pi R^3 t$

**Open Section**  $J_o = \frac{t^3}{3} 2\pi R = \frac{2\pi}{3} R t^3$

For  $J_c = J_s$ , we need  
 $t = \frac{1}{4} R = 0.25R$ .



## 2.4. Combined Cells

### Torsion of Thin-Walled Sections

- It is instructive to now take stock of what we have obtained so far. The moment-twist relationship is generically written by

$$M_1 = GJ\theta',$$

with  $J$  being the torsion constant.

#### Solid Sections

$$J = I_{11} + \int_S x_2 \psi_{,3} - x_3 \psi_{,2} dA$$

#### Closed Sections

$$J = \frac{4tA^2}{|\Gamma|}$$

#### Open Sections

$$J = \frac{t^3 |\Gamma|}{3}$$

Let us consider the implications on a **Circular Section** of radius  $R$ .

**Solid Section**  $J_s = I_{11} = \frac{\pi R^4}{2}$ .

**Closed Section**  $J_c = \frac{4t \times (\pi R^2)^2}{2\pi R} = 2\pi R^3 t$

**Open Section**  $J_o = \frac{t^3}{3} 2\pi R = \frac{2\pi}{3} R t^3$

For  $J_o = J_s$ , we need  
 $t = \sqrt[3]{\frac{3}{4}} R \approx 0.91R$ .

## 2.4. Combined Cells

### Torsion of Thin-Walled Sections

- It is instructive to now take stock of what we have obtained so far. The moment-twist relationship is generically written by

$$M_1 = GJ\theta',$$

with  $J$  being the torsion constant.

#### Solid Sections

$$J = I_{11} + \int_S x_2 \psi_{,3} - x_3 \psi_{,2} dA$$

#### Closed Sections

$$J = \frac{4tA^2}{|\Gamma|}$$

#### Open Sections

$$J = \frac{t^3 |\Gamma|}{3}$$

Let us consider the implications on a **Circular Section** of radius  $R$ .

**Solid Section**  $J_s = I_{11} = \frac{\pi R^4}{2}$ .

**Closed Section**  $J_c = \frac{4t \times (\pi R^2)^2}{2\pi R} = 2\pi R^3 t$

**Open Section**  $J_o = \frac{t^3}{3} 2\pi R = \frac{2\pi}{3} R t^3$

For a given thickness,

$$\frac{J_o}{J_c} = \frac{1}{3} \left( \frac{t}{R} \right)^2 = \mathcal{O}(t^2).$$

## 2.4. Combined Cells

### Torsion of Thin-Walled Sections

- It is instructive to now take stock of what we have obtained so far. The moment-twist relationship is generically written by

$$M_1 = GJ\theta',$$

with  $J$  being the torsion constant

So open sections can safely be ignored for torsion calculations in the combined context!

Solid Sections

$$J = I_{11} + \int_S x_2 \psi_{,3} - x_3 \psi_{,2} dA$$

$$J = \frac{4tA^2}{|\Gamma|}$$

Open Sections

$$J = \frac{t^3 |\Gamma|}{3}$$

Let us consider the implications on a **Circular Section** of radius  $R$ .

**Solid Section**  $J_s = I_{11} = \frac{\pi R^4}{2}$ .

**Closed Section**  $J_c = \frac{4t \times (\pi R^2)^2}{2\pi R} = 2\pi R^3 t$

**Open Section**  $J_o = \frac{t^3}{3} 2\pi R = \frac{2\pi}{3} R t^3$

For a given thickness,

$$\frac{J_o}{J_c} = \frac{1}{3} \left( \frac{t}{R} \right)^2 = \mathcal{O}(t^2).$$

## 2.4. Combined Cells

### Torsion of Thin-Walled Sections

- It is instructive to now take stock of what we have obtained so far. The moment-twist relationship is generically written by

$$M_1 = GJ\theta',$$

with  $J$  being the torsion constant

**So open sections can safely be ignored for torsion calculations in the combined context!**

Solid Sections

$$J = I_{11} + \int_S x_2 \psi_{,3} - x_3 \psi_{,2}$$

Let us consider the

**Solid Section**  $J_s = I_{11} = \frac{\pi R^4}{2}$ .

**Closed Section**  $J_c = \frac{4t \times (\pi R^2)^2}{2\pi R} = 2\pi R^3 t$

**Open Section**  $J_o = \frac{t^3}{3} 2\pi R = \frac{2\pi}{3} R t^3$

Open Sections

$$J = \frac{t^3 |\Gamma|}{3}$$

radius  $R$ .

For a given thickness,

$$\frac{J_o}{J_c} = \frac{1}{3} \left( \frac{t}{R} \right)^2 = \mathcal{O}(t^2).$$

### 3. Summary of Final Expressions

#### Solid Sections

$$J = I_{11} + \int_S X_2 \psi_{,3} - X_3 \psi_{,2} dA$$

$$u_1 = \theta' \psi(X_2, X_3)$$

#### Thin Strip Idealization

$$J = \frac{ht^3}{3}$$

$$u_1 = X_2 X_3 \theta'$$

#### Closed Sections

$$GJ = \frac{4A^2}{\delta}$$

$$u_1(s) = u_0 + 2A\theta' \left( \frac{\delta_{O_s}(s)}{\delta} - \frac{A_{O_s}(s)}{A} \right)$$

#### Open Sections

$$GJ = \frac{1}{3} \int_S Gt^3 ds$$

$$u_1(s) = u_0 - 2\theta' A_{O_s}(s) - \theta' ns$$

$$\delta_{O_s}(s) = \int_0^s \frac{1}{Gt} dx; \quad A_{O_s}(s) = \frac{1}{2} \int_0^s p dx$$

# References I

- [1] M. H. Sadd. *Elasticity: Theory, Applications, and Numerics*, 2nd ed. Amsterdam ; Boston: Elsevier/AP, 2009. ISBN: 978-0-12-374446-3 (cit. on pp. 2, 29, 30, 33–35).
- [2] T. H. G. Megson. *Aircraft Structures for Engineering Students*, Elsevier, 2013. ISBN: 978-0-08-096905-3 (cit. on pp. 2, 53, 54).