



AS2070: Aerospace Structural Mechanics (V7)

Module 1: Elastic Stability


Instructor: Nidish Narayanaa Balaji

Dept. of Aerospace Engg., IIT Madras, Chennai


February 11, 2026

Table of Contents

- 1 Introduction
 - Elastic Stability
 - Bifurcation
 - Modes of Stability Loss
- 2 The Principle of Virtual Work
 - A Rigid Column Under Axial Load
- 3 Euler Bernoulli Beam Theory
 - The Axial Deformation Problem
 - The Euler Buckling Problem
 - Equilibrium Equations Through Force Balance
 - The Euler Buckling Problem
 - The Pinned-Pinned Column
 - The Southwell Plot
 - The Clamped-Clamped Column
- 4 Snap-Through Buckling
- 5 Plate Buckling
 - Governing Equations
 - In Plane Deformations
 - Out-of-Plane Deformations
 - Reaction-Kinematics Relationships
 - Uniform Plates Under Uniaxial Compression
- 6 Food For Thought

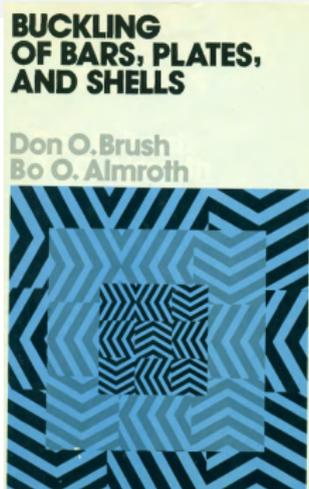

Chapters 1-3 in Brush and Almroth (1975) (also see Appendix A on Variational Methods).

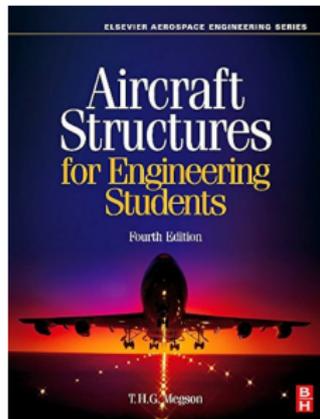


Chapters 7-9 in Megson (2013) (also see chapters 4,5 for principle of virtual work and energy methods)

1. Introduction

Structural Stability: What?


- Consider supporting a mass M on the top of a rod.

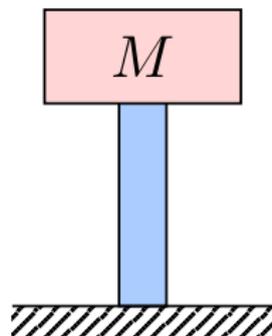


1. Introduction

Structural Stability: What?

- Consider supporting a mass M on the top of a rod.

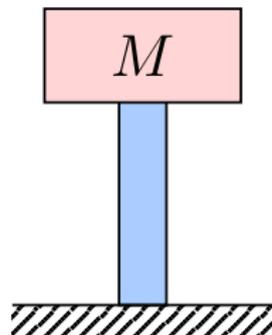



Two Extreme Cases:

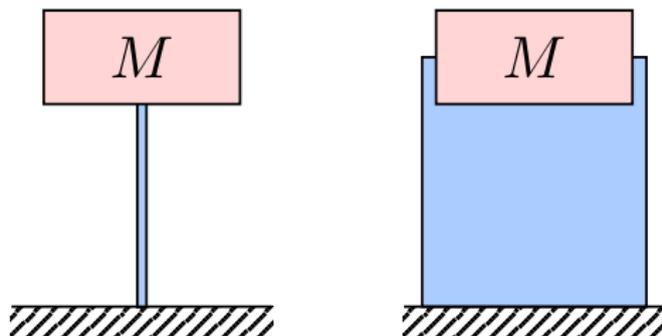



1. Introduction

Structural Stability: What?

- Consider supporting a mass M on the top of a rod.
- Collapse is imminent on at least one!

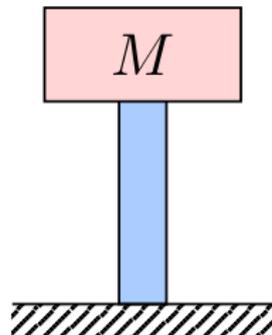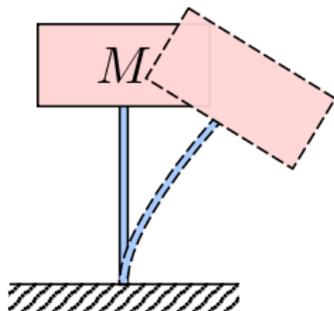



Two Extreme Cases:

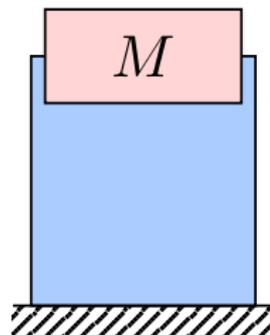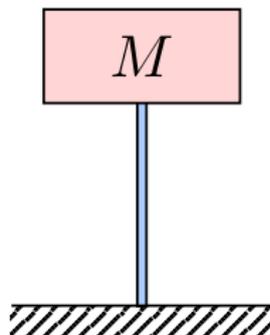



1. Introduction

Structural Stability: What?

- Consider supporting a mass M on the top of a rod.
- Collapse is imminent on at least one!

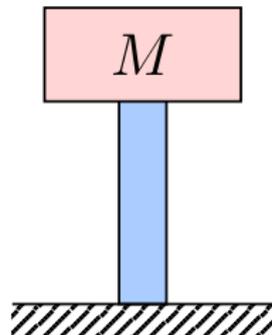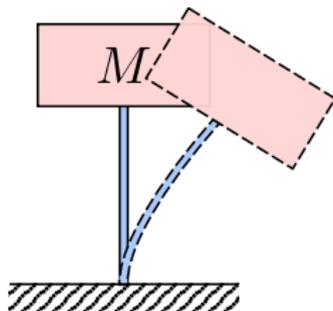

Two Extreme Cases:

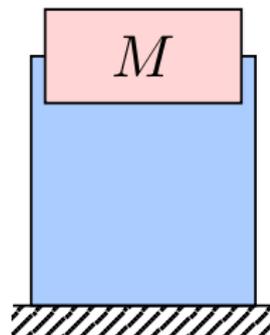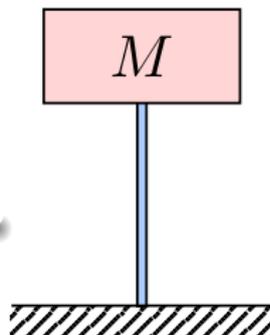

How can we mathematically describe this?

1. Introduction


Structural Stability: Perturbation Behavior

Perturbation Behavior

Key insight we will invoke is behavior under **perturbation**:

How would the system respond if I slightly perturb it?

- Mathematically, by perturbation we mean *any change to the system's configuration*.
- In this case, this could be different deflection shapes.

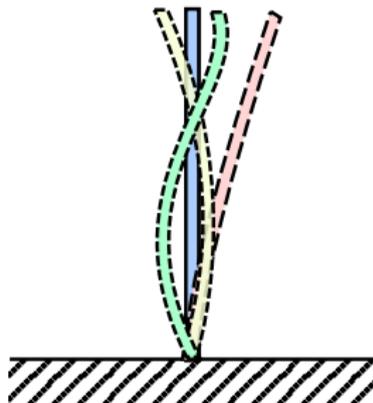

1. Introduction

Structural Stability: Perturbation Behavior

Perturbation Behavior

Key insight we will invoke is behavior under **perturbation**:


How would the system respond if I slightly perturb it?

- Mathematically, by perturbation we mean *any change to the system's configuration*.
- In this case, this could be different deflection shapes.

Question (Slightly more specific)

What will the system tend to do if an arbitrarily small magnitude of perturbation is introduced?

- Will it tend to **return to its original configuration**?
- Will it **blow up**?
- Will it do **something else entirely**?

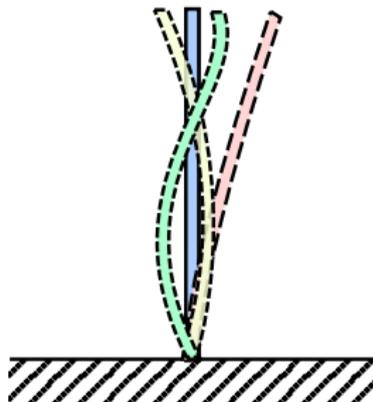

1.1. Elastic Stability

Introduction

What do these words mean?

Elastic \rightarrow Reversible \rightarrow Conservative

Conservative System

- The restoring force of a conservative system can be written using a gradient of a **potential function**:

$$\underline{F} = -\nabla U.$$


Equilibrium

- System achieves equilibrium when $\underline{F} = \underline{0}$, i.e.,

$$\nabla U = 0.$$

1D Example

Consider a system whose configuration is expressed by the scalar x and the potential is as shown.

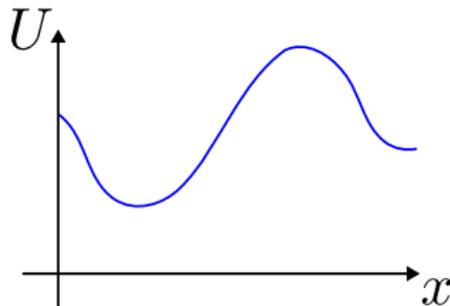

1.1. Elastic Stability

Introduction

What do these words mean?

Elastic \rightarrow Reversible \rightarrow Conservative

Conservative System

- The restoring force of a conservative system can be written using a gradient of a **potential function**:

$$\underline{F} = -\nabla U.$$

Equilibrium


- System achieves equilibrium when $\underline{F} = \underline{0}$, i.e.,

$$\nabla U = 0.$$

1D Example

Consider a system expressed by the scalar potential is as shown.

These are the equilibria

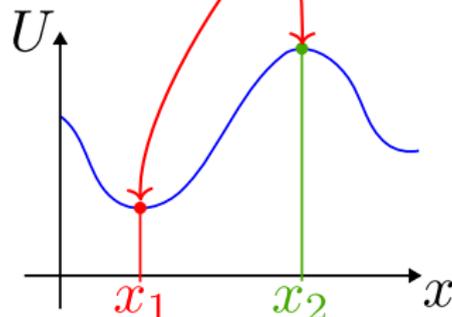

1.1. Elastic Stability

Introduction

What do these words mean?

Elastic \rightarrow Reversible \rightarrow Conservative

Conservative System

- The restoring force of a conservative system can be written using a gradient of a **potential function**:

$$\underline{F} = -\nabla U.$$


Equilibrium

- System achieves equilibrium when $\underline{F} = \underline{0}$, i.e.,

$$\nabla U = 0.$$

1D Example

Consider a system whose configuration is expressed by the scalar x and the potential is as shown.

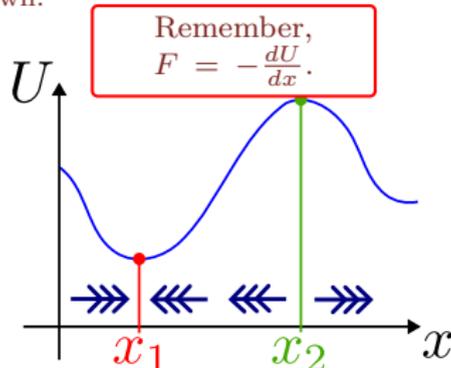

1.1. Elastic Stability

Introduction

What do these words mean?

Elastic \rightarrow Reversible \rightarrow Conservative

Conservative System

- The restoring force of a conservative system can be written using a gradient of a **potential function**:

$$\underline{F} = -\nabla U.$$


Equilibrium

- System achieves equilibrium when $\underline{F} = \underline{0}$, i.e.,

$$\nabla U = 0.$$

1D Example

Consider a system whose configuration is expressed by the scalar x and the potential is as shown.

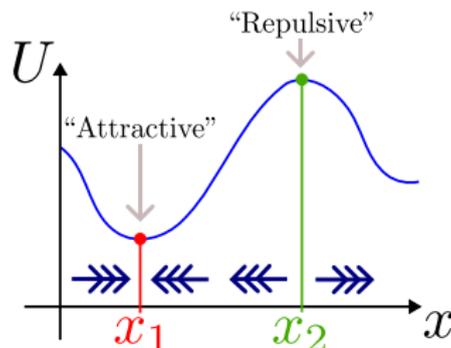

1.1. Elastic Stability

Introduction

What do these words mean?

Elastic \rightarrow Reversible \rightarrow Conservative

Conservative System

- The restoring force of a conservative system can be written using a gradient of a **potential function**:

$$\underline{F} = -\nabla U.$$


Equilibrium

- System achieves equilibrium when $\underline{F} = \underline{0}$, i.e.,

$$\nabla U = 0.$$

1D Example


Consider a system whose configuration is expressed by the scalar x and the potential is as shown.

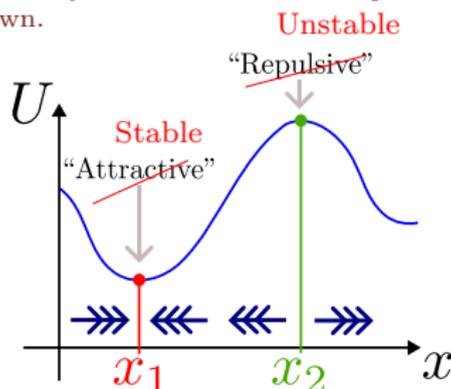

1.2. Bifurcation

Introduction

A system is said to have **undergone a bifurcation** if its state of stability has changed due to the variation of some parameter.

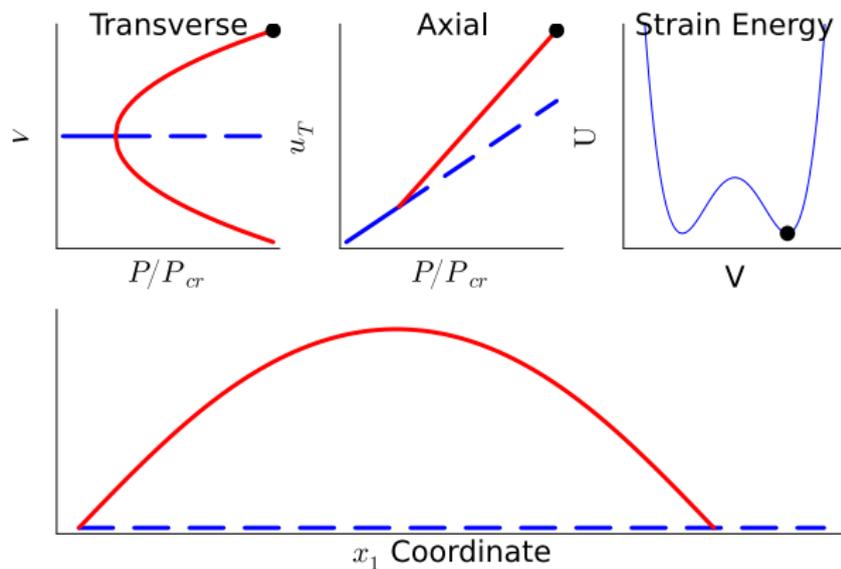


Example: A pinned-pinned beam undergoing axial loading.


1.3. Modes of Stability Loss

Introduction

The **configuration** that a system can assume as it undergoes a bifurcation is the *mode* of the stability loss.

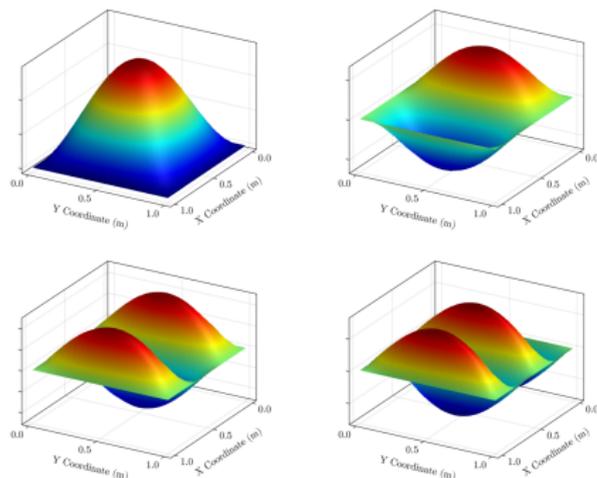

Example: Thin plate (pinned) under axial loading

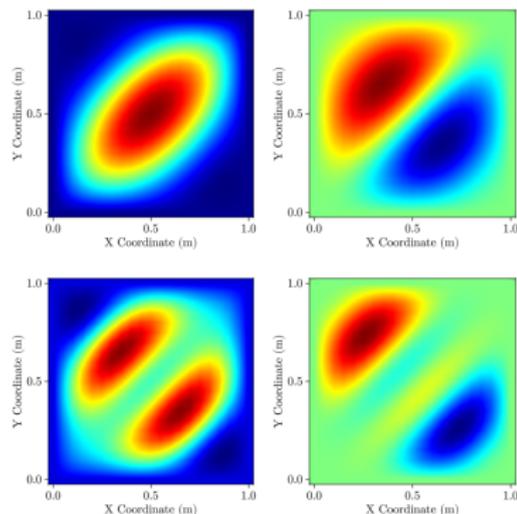

Example: Thin plate (pinned) under shear loading

2. The Principle of Virtual Work

An Optimization Framework for Mechanics



- Let us consider a point supported by a linear spring acted upon by a force.

Kinematics

Assume displacement to be restricted to the \underline{e}_x axis:

$$\underline{u} = u_x \underline{e}_x.$$

Equilibrium Condition

Net forces acting on the object is zero at equilibrium:

$$\sum F_x = F - F_{spring} = 0.$$

Constitutive Modeling

Spring reaction is linearly proportional to displacement.

$$F_{spring} = ku_x.$$

- While the above three already allow us to solve the problem of finding the equilibrium configuration of the system, we turn our attention to what happens in the vicinity of the equilibrium now.
- We define **Virtual Displacement** as an *infinitesimal displacement that is consistent with constraints*. (we read kinematic assumptions as constraints here) And we denote this by $\delta \underline{u}$.
- Since this is infinitesimal by definition, the associated work done, i.e., **Virtual Work** is written as

$$\delta W = \left(\sum F_x \right) \delta u_x = (F - ku_x) \delta u_x.$$

- Being a small quantity, regular calculus rules apply to the $\delta(\cdot)$ if considered as an infinitesimal operator just as they do for $d(\cdot)$, so the above simplifies as:

$$\delta W = \delta \left(Fu_x - \frac{k}{2} u_x^2 \right).$$

2. The Principle of Virtual Work

An Optimization Framework for Mechanics



- Let us consider a point supported by a linear spring acted upon by a force.

Kinematics

Assume displacement to be restricted to the \underline{e}_x axis:

$$\underline{u} = u_x \underline{e}_x.$$

Equilibrium Condition

Net forces acting on the object is zero at equilibrium:

$$\sum F_x = F - F_{spring} = 0.$$

Constitutive Modeling

Spring reaction is linearly proportional to displacement.

$$F_{spring} = ku_x.$$

- While the above three already allow us to solve the problem of finding the equilibrium configuration of the system, we turn our attention to what happens in the vicinity of the equilibrium now.
- We define **Virtual Displacement** as an *infinitesimal displacement that is consistent with constraints*. (with $\delta \underline{u}$) And we denote this by $\delta \underline{u}$.
- Since this is infinitesimal, δW is the work done in taking the system from a kinematic state u_x to a kinematic state $u_x + \delta u_x$. **Virtual Work** is written as

$$\delta W = \left(\sum F_x \right) \delta u_x = (F - ku_x) \delta u_x.$$

- Being a small quantity, regular calculus rules apply to the $\delta(\cdot)$ if considered as an infinitesimal operator just as they do for $d(\cdot)$, so the above simplifies as:

$$\delta W = \delta \left(Fu_x - \frac{k}{2} u_x^2 \right).$$

2. The Principle of Virtual Work

An Optimization Framework for Mechanics



- Let us consider a point supported by a linear spring acted upon by a force.

Kinematics

Assume displacement to be restricted to the \underline{e}_x axis:

$$\underline{u} = u_x \underline{e}_x.$$

Equilibrium Condition

Net forces acting on the object is zero at equilibrium:

$$\sum F_x = F - F_{spring} = 0.$$

Constitutive Modeling

Spring reaction is linearly proportional to displacement.

$$F_{spring} = ku_x.$$

- While the above three already allow us to solve the problem of finding the equilibrium configuration of the system, we turn our attention to what happens in the vicinity of the equilibrium now.
- We define **Virtual Displacement** $\delta \underline{u}$ with constraints. (we require that this is consistent and we denote this by $\delta \underline{u}$.)
- Since this is infinitesimal by definition, the associated work done, i.e., **Virtual Work** is written as

$$\delta W = \left(\sum F_x \right) \delta u_x = (F - ku_x) \delta u_x.$$

- Being a small quantity, regular calculus rules apply to the $\delta(\cdot)$ if considered as an infinitesimal operator just as they do for $d(\cdot)$, so the above simplifies as:

$$\delta W = \delta \left(Fu_x - \frac{k}{2} u_x^2 \right).$$

We have now defined a new quantity: **Work Potential**, with units of energy. This is written as $W = \Pi - U$.

it is consistent and we denote

2. The Principle of Virtual Work

An Optimization Framework for Mechanics



- Let us consider a point supported by a linear spring acted upon by a force.

Kinematics

Assume displacement to be restricted to the \underline{e}_x axis:

$$\underline{u} = u_x \underline{e}_x.$$

Equilibrium Condition

Net forces acting on the object is zero at equilibrium:

$$\sum F_x = F - F_{spring} = 0.$$

Constitutive Modeling

Spring reaction is linearly proportional to displacement.

$$F_{spring} = ku_x.$$

- While the above three already allow us to solve the problem of finding the equilibrium configuration of the system, we turn our attention to what happens in the vicinity of the equilibrium now.

- We define **Virtual Displacement** $\delta \underline{u}$ with constraints. (we require this to be consistent and we denote this by $\delta \underline{u}$.)

We have now defined a new quantity: **Work Potential**, with units of energy. This is written as $W = \Pi - U$.

- Since this is infinitesimal by definition, the associated work done, i.e., **Virtual Work** is written as

$$\delta W = \left(\sum F_x \right) \delta u_x = (F - ku_x) \delta u_x$$

- Being a scalar, the calculus rules apply to the δ operator just as they do for $d(\cdot)$, so the above simplifies as:

Load Contribution $\Pi = \mathbf{F} \mathbf{u}_x$

Elastic Contribution $U = \frac{1}{2} k \mathbf{u}_x^2$

$$\delta W = \delta \left(F u_x - \frac{k}{2} u_x^2 \right).$$

2. The Principle of Virtual Work

An Optimization Framework for Mechanics

- The **Work Potential** is quite a helpful quantity for us because
 - ① **the first derivative $\partial W/\partial u_x$ represents the overall force $\sum F_x$ acting on the system** (static equilibrium is the same as stating $\partial W/\partial u_x = 0$), and
 - ② **the second derivative $\partial^2 W/\partial u_x^2$ at equilibrium represents the surplus force as we move away** from the equilibrium (because this represents $\partial(\sum F_x)/\partial u_x$).
- An equilibrium can be sought by finding u_x for $\partial W/\partial u_x = 0$.
- For classifying the equilibria that have been found, we use the following principles (based on arguments about what is happening to the surplus force as we move away):
 - If $\partial^2 W/\partial u_x^2 < 0$, the equilibrium is stable.
 - If $\partial^2 W/\partial u_x^2 > 0$, the equilibrium is unstable.
 - If $\partial^2 W/\partial u_x^2 = 0$, the equilibrium is neutrally stable (up to second order).
- The above is mathematically identical to an optimization problem posed as

$$\underset{u_x \in \mathbb{R}}{\text{extremize}} \quad W,$$

and the **maxima of this optimization problem are stable equilibria**, the **minima are unstable**, and the **saddles are neutral**.

2. The Principle of Virtual Work

An Optimization Framework for Mechanics

- The **Work Potential** is quite a helpful quantity for us because
 - ① **the first derivative $\partial W/\partial u_x$ represents the overall force $\sum F_x$ acting on the system** (static equilibrium is the same as stating $\partial W/\partial u_x = 0$), and
 - ② **the second derivative $\partial^2 W/\partial u_x^2$ at equilibrium represents the surplus force as we move away from the equilibrium** (because this represents $\partial(\sum F_x)/\partial u_x$).

For the Spring Example,

$$W = Fu_x - \frac{k}{2}u_x^2, \quad \frac{\partial W}{\partial u_x} = F - ku_x, \quad \frac{\partial^2 W}{\partial u_x^2} = -k.$$

- There exists exactly only equilibrium point for fixed F, k : $u_x^* = \frac{F}{k}$, and
- this equilibrium is unconditionally stable (always stable).
- the above is mathematically identical to an optimization problem posed as

$$\underset{u_x \in \mathbb{R}}{\text{extremize}} \quad W,$$

and the **maxima of this optimization problem are stable equilibria**, the **minima are unstable**, and the **saddles are neutral**.

2.1. A Rigid Column Under Axial Load

The Principle of Virtual Work

- Now let us consider a rigid column supported by a pin as shown.
- It is also supported by a torsional spring which is governed by a linear constitutive law ($M_{spring} = k\theta$).
- Let's count the work done by each member (only once per member)


Elastic Contributions

- Rotational angle is the work-conjugate of moment.

$$M_{spring}\delta\theta = k\theta\delta\theta$$

$$= \delta\left(\frac{1}{2}k\theta^2\right),$$

$$\Rightarrow U = \frac{k}{2}\theta^2.$$

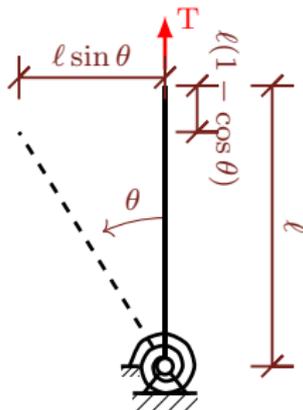

Load Contributions

- The load at the tip is $T\mathbf{e}_y$.
- The displacement of the tip is $l(1 - \cos \theta)\mathbf{e}_y - l \sin \theta \mathbf{e}_x$.

So we have:

$$\Pi = Tl(\cos \theta - 1).$$

- We **do not** count moment contributions separately.

- So the work potential is written as: $\Pi - U = W = Tl(\cos \theta - 1) - \frac{k}{2}\theta^2$.

2.1. A Rigid Column Under Axial Load

The Principle of Virtual Work

Work Potential

$$W = T\ell(\cos\theta - 1) - \frac{k}{2}\theta^2, \quad \frac{\partial W}{\partial\theta} = -(T\ell\sin\theta + k\theta), \quad \frac{\partial^2 W}{\partial\theta^2} = -(T\ell\cos\theta + k).$$

- Under leading term small angle assumptions ($\sin\theta \approx \theta$, $\cos\theta \approx 1$) we have,

$$\theta_{eq} = 0 \quad (\text{always}), \quad \left. \frac{\partial^2 W}{\partial\theta^2} \right|_{\theta_{eq}} = -(T\ell + k).$$

The equilibrium is stable as long as $T > -\frac{k}{\ell}$.

- Our prediction for $T < -\frac{k}{\ell}$ is just that there exists a **trivial equilibrium** ($\theta_{eq} = 0$) **that is unstable**.
- Under two-term small angle assumptions ($\sin\theta \approx \theta - \frac{\theta^3}{6}$, $\cos\theta \approx 1 - \frac{\theta^2}{2}$) we have,

$$\theta_{eq} = 0, \pm\sqrt{6\left(1 + \frac{k}{T\ell}\right)}, \quad \text{with} \quad \frac{\partial^2 W}{\partial\theta^2} = -(T\ell + k), 2(T\ell + k),$$


where we now predict two additional solutions.

- Here we have a more precise prediction for $T < -\frac{k}{\ell}$: the non-trivial θ solutions are stable.

2.1. A Rigid Column Under Axial Load

The Principle of Virtual Work

The "Forced Response Curve" ($k = 1 \text{ N/m}, \ell = 1 \text{ m}$)

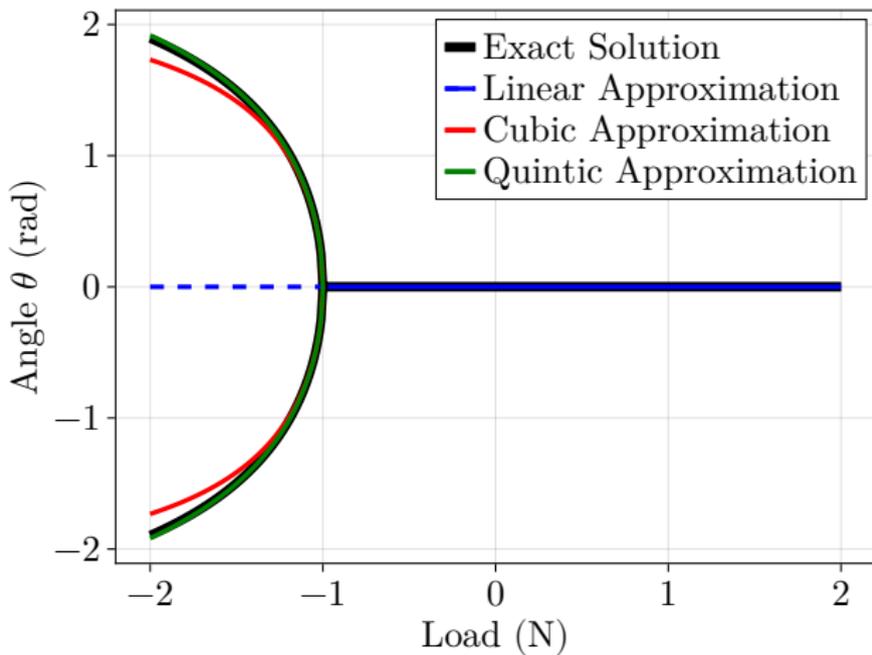

$W :$

- Under l

The equ

- Ou
- tha
- Under t

where w

- Her

$+ k$).

$(\theta_{eq} = 0)$

e have,

),

ons are stable.

3. Euler Bernoulli Beam Theory



Kinematic Assumptions

- 1 Small displacements and rotations
- 2 Plane sections remain planar and do not change shape
- 3 Neutral axis remains perpendicular to the section
- 4 Small strain
- 5 Von Karman strain assumption

- Assumptions 1 and 2 imply that the deformation field can be written as

$$u_x = u(x) - y\theta(x)$$

$$u_y = v(x)$$

- Assumption 3 implies that $\theta = \frac{dv}{dx} = v'$ so we have

$$u_x = u - yv'$$

$$u_y = v$$

- Assumption 4 implies that the axial strain can be written as

$$\varepsilon_x = u'_x + \frac{1}{2} (u'^2_x + u'^2_y)$$


- With assumption 5 we drop the u'^2_x term (as it will certainly be smaller than u'_x , which is small to begin with as of assumption 4). So we have

$$\varepsilon_x = u'_x + \frac{1}{2} u'^2_y$$

Constitutive Assumption

We shall assume that we're looking at a slender beam so plane stress assumptions are applicable and $\sigma_x = E_y \varepsilon_x$ with E_y being the Young's modulus.

3. Euler Bernoulli Beam Theory

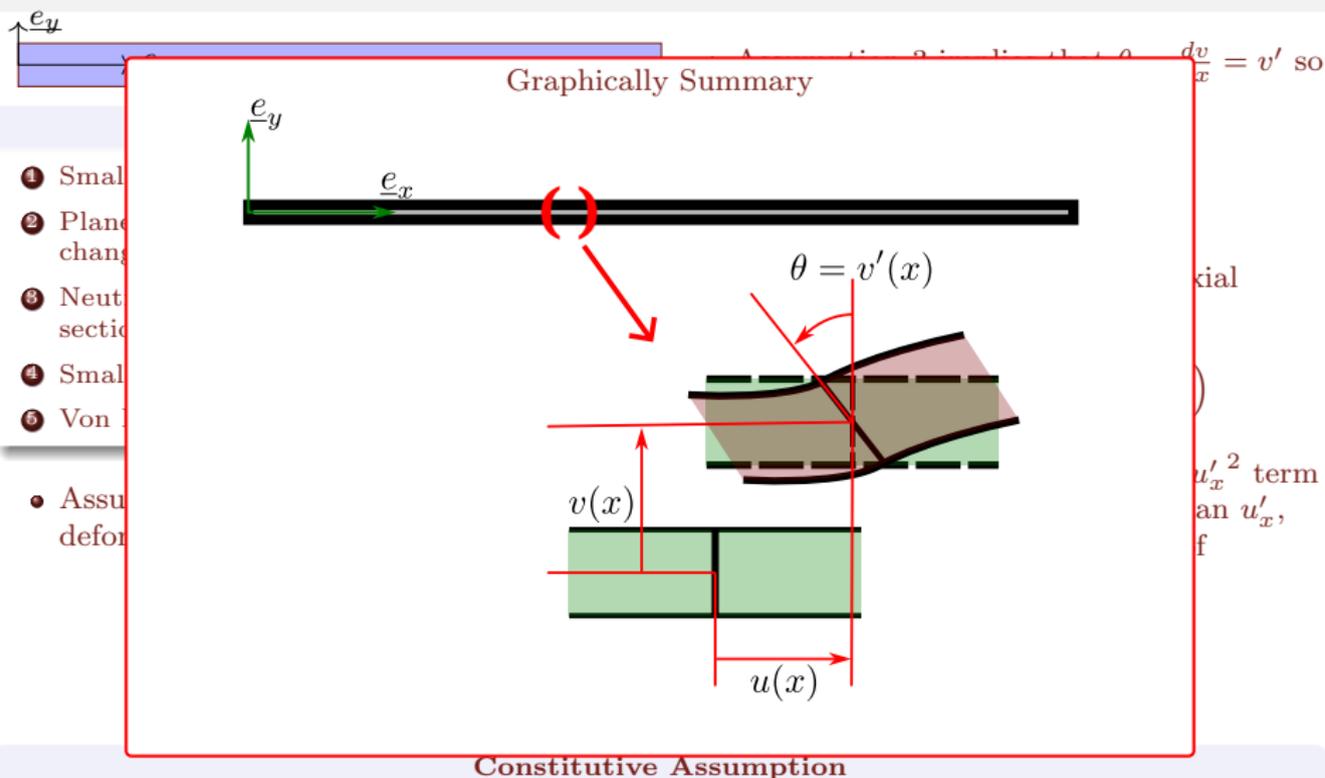

We shall assume that we're looking at a slender beam so plane stress assumptions are applicable and $\sigma_x = E_y \varepsilon_x$ with E_y being the Young's modulus.

3. Euler Bernoulli Beam Theory

Graphically Summary

e_y
 e_x
 $\theta = v'(x)$
 Treating this in the general context might be a little distracting at this stage so let us employ a “piece-meal” approach in applying the principle of virtual work here.
 $u(x)$

Constitutive Assumption

We shall assume that we're looking at a slender beam so plane stress assumptions are applicable and $\sigma_x = E_y \varepsilon_x$ with E_y being the Young's modulus.

3.1. The Axial Deformation Problem

Euler Bernoulli Beam Theory



- Let us first suppose that only axial deformations are present, so $u_x = u(x)$ and $u_y = 0$. So the axial strain is $\boxed{\varepsilon_x = u'}$.
- Let us also suppose that the following boundary conditions are provided:
 - The left face does not deform axially ($u_x = 0$ for $x = 0$), and
 - A load of T is uniformly applied at the right face.

A Note on Virtual Displacements Here

- Unlike the previous examples where the kinematic deformation was just a single scalar, here deformation $u(x)$ is a function of the spatial coordinate x , i.e., a **field**.
- So the virtual displacement is also a **field**, $\delta u(x)$. The virtual work δW is the work done to take the system from deformation state $u(x)$ to deformation state $u(x) + \delta u(x)$.

Load Virtual Work

$$\delta \Pi = T \delta u(x) \Big|_{x=\ell}$$

Elastic Virtual Work

$$\delta U = \int_0^{\ell} \left[\int_{\mathcal{A}} (\sigma_x(x) \delta \varepsilon_x(x)) dA \right] dx$$

3.1. The Axial Deformation Problem

Euler Bernoulli Beam Theory



- Let us first suppose that only axial deformations are present, so $u_x = u(x)$ and $u_y = 0$. So the axial strain is $\varepsilon_x = u'$.
- Let us also suppose that the following boundary conditions are provided:
 - The left face does not deform axially ($u_x = 0$ for $x = 0$), and
 - A load of T is uniformly applied at the right face.

A Note on Virtual

- Unlike the previous examples where the kind of deformation $u(x)$ is a function of the spatial coordinate, here
- So the virtual displacement is also a **field**, and one to take the system from deformation state $u(x)$ to deformation state $u(x) + \delta u(x)$.

This is the **elastic virtual energy density** $\sigma_x \delta \varepsilon_x$. It has to be integrated over the complete 3-dimensional beam to get the energy.

Load Virtual Work


$$\delta \Pi = T \delta u(x) \Big|_{x=l}$$

Elastic Virtual Work

$$\delta U = \int_0^l \left[\int_{\mathcal{A}} \sigma_x(x) \delta \varepsilon_x(x) dA \right] dx$$

3.1. The Axial Deformation Problem

Euler Bernoulli Beam Theory

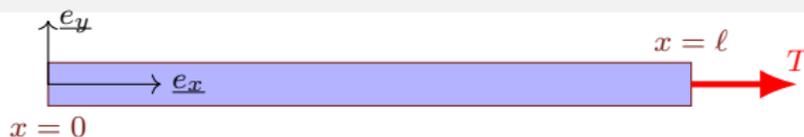

- Let us first suppose that only axial deformations are present, so $u_x = u(x)$ and $u_y = 0$. So the axial strain is $\varepsilon_x = u'$.
- Let us also suppose that the following boundary conditions are provided:
 - The left face does not deform axially ($u_x = 0$ for $x = 0$), and
 - A load of T is uniformly applied at the right face.

A Note on Virtual Displacements Here

- Unlike the previous examples where the kinematic deformation $u(x)$ is a function of the spatial coordinate, here $u(x)$ is a function of the spatial coordinate. This is the integral over the cross section.
- So the virtual displacement is also a **field**, $\delta u(x)$. The virtual work δW is the work done to take the system from deformation state $u(x)$ to deformation state $u(x) + \delta u(x)$.

Load Virtual Work

$$\delta \Pi = T \delta u(x) \Big|_{x=l}$$

Elastic Virtual Work

$$\delta U = \int_0^l \left[\int_{\mathcal{A}} (\sigma_x(x) \delta \varepsilon_x(x)) dA \right] dx$$

3.1. The Axial Deformation Problem

Euler Bernoulli Beam Theory



- Let us first suppose that only axial deformations are present, so $u_x = u(x)$ and $u_y = 0$. So the axial strain is $\boxed{\varepsilon_x = u'}$.
- Let us also suppose that the following boundary conditions are provided:
 - The left face does not deform axially ($u_x = 0$ for $x = 0$), and
 - A load of T is uniformly applied at the right face.

A Note on Virtual Displacements Here

- Unlike the previous examples where the kinematic deformation $u(x)$ is a function of the spatial coordinate, here $u(x)$ is a function of the spatial coordinate. And this is the integral over the span of the beam.
- So the virtual displacement is also a **field**, $\delta u(x)$. The virtual work δW is the work done to take the system from deformation state $u(x)$ to deformation state $u(x) + \delta u(x)$.

Load Virtual Work

$$\delta \Pi = T \delta u(x) \Big|_{x=\ell}$$

Elastic Virtual Work

$$\delta U = \int_0^{\ell} \left[\int_{\mathcal{A}} (\sigma_x(x) \delta \varepsilon_x(x)) dA \right] dx$$

3.1. The Axial Deformation Problem

Euler Bernoulli Beam Theory

Load Virtual Work

$$\delta\Pi = T\delta u(x)\Big|_{x=\ell}$$

Elastic Virtual Work

$$\delta U = \int_0^\ell \left[\int_{\mathcal{A}} (\sigma_x(x)\delta\varepsilon_x(x)) dA \right] dx$$

- From kinematics we have $\varepsilon_x = u'$ and from constitution we have $\sigma_x = E_y\varepsilon_x$, so together we have $\sigma_x = E_y u'$.
- The “inner” integral of the elastic virtual work leads to:

$$\int_{\mathcal{A}} E_y u'(x)\delta u'(x)dA = E_y A u' \delta u',$$

where A is the area of the cross section. (We can do this because $u(x)$ is only a function of x).

- The “outer” integral gets simplified (using chain rule) as

$$\int_0^\ell E_y A u'(x)\delta u'(x)dx = - \int_0^\ell [E_y A u'(x)]' \delta u(x)dx + [E_y A u'(x)]\delta u(x)\Big|_{x=0}^\ell$$

3.1. The Axial Deformation Problem

Euler Bernoulli Beam Theory

Load Virtual Work

$$\delta\Pi = T\delta u(x)\Big|_{x=\ell}$$

Elastic Virtual Work

$$\delta U = \int_0^\ell \left[\int_{\mathcal{A}} (\sigma_x(x)\delta\varepsilon_x(x)) dA \right] dx$$

- From kinematics we have $\varepsilon_x = u'$ and from constitution we have $\sigma_x = E_y\varepsilon_x$, so together we have $\sigma_x = E_y u'$.
- The “inner” integral of the elastic virtual work leads to:

$$\int_{\mathcal{A}} E_y u'(x)\delta u'(x)dA = E_y A u' \delta u',$$

where A is the area of cross-section. This is an integral over the domain $x \in (0, \ell)$ because $u(x)$ is only a function of x .

- The “outer” integral gets simplified (using chain rule) as

$$\int_0^\ell E_y A u'(x)\delta u'(x)dx = - \int_0^\ell [E_y A u'(x)]' \delta u(x)dx + [E_y A u'(x)]\delta u(x)\Big|_{x=0}^\ell$$

3.1. The Axial Deformation Problem

Euler Bernoulli Beam Theory

Load Virtual Work

$$\delta\Pi = T\delta u(x)\Big|_{x=\ell}$$

Elastic Virtual Work

$$\delta U = \int_0^\ell \left[\int_{\mathcal{A}} (\sigma_x(x)\delta\varepsilon_x(x)) dA \right] dx$$

- From kinematics we have $\varepsilon_x = u'$ and from constitution we have $\sigma_x = E_y\varepsilon_x$, so together we have $\sigma_x = E_y u'$.
- The “inner” integral of the elastic virtual work leads to:

$$\int_{\mathcal{A}} E_y u'(x)\delta u'(x)dA = E_y A u' \delta u',$$

where A is the area of the cross section. (We can drop the dA term because it is constant of x).

- The “outer” integral gets simplified (using chain rule) as

$$\int_0^\ell E_y A u'(x)\delta u'(x)dx = - \int_0^\ell [E_y A u'(x)]' \delta u(x)dx + [E_y A u'(x)]\delta u(x)\Big|_{x=0}^\ell$$

These are (2) boundary terms

3.1. The Axial Deformation Problem

Euler Bernoulli Beam Theory

So What IS this Virtual Displacement ?

- We defined it as an **infinitesimal** deformation field that **obeys kinematic constraints exactly**.
- The kinematic constraint in this case is that $u(x) = 0$ for $x = 0$, that's all.
- So δu can be ANY FUNCTION $g(x)$ with $g(x = 0) = 0$.
(More rigorously, we require square integrability, but we can gloss over this for now)
- Distinguish this with $u(x)$, which describes the **physical deformation** of the beam. **As they stand, $\delta u(x)$ and $u(x)$ are two completely different functions.**
- After the virtual displacement is applied (if it is), the system's "total deformation field" will be $u(x) + \delta u(x)$.

We restate **The Principle of Virtual Work:**

The virtual work must be zero for ANY CHOICE of virtual displacement $\delta u(x)$ if physical displacement $u(x)$ corresponds to equilibrium.

$$\int_0^L E_y A u'(x) \delta u'(x) dx = - \int_0^L [E_y A u'(x)]' \delta u(x) dx + [E_y A u'(x)] \delta u(x) \Big|_{x=0}$$

3.1. The Axial Deformation Problem

Euler Bernoulli Beam Theory

- Combining all that we have, we can write

$$\delta W := \delta \Pi - \delta U = \int_0^{\ell} [E_y A u'(x)]' \delta u(x) dx + [T - E_y A u'(x)] \delta u(x) \Big|_{x=\ell} + [E_y A u'(x)] \delta u(x) \Big|_{x=0}$$

- δW has to be zero **FOR ALL CHOICES OF $\delta u(x)$** , as per the principle of virtual work. So we can write

$$\begin{aligned} [E_y A u'(x)]' &= 0, & x \in (0, \ell), \\ E_y A u'(x) &= 0, & x \in \{\ell\}, \\ u(x) &= 0, & x \in \{0\}. \end{aligned}$$

- Since $u(x) = 0$ AND $\delta u(x) = 0$, we trivially satisfy $E_y A u'(x) \delta u(x) \Big|_{x=0} = 0$.
- For the $x = \ell$ boundary condition, $\delta u(x) = 0$ is too restrictive and not valid - so we set the coefficient of $\delta u(x)$ to zero.
- For the integral term we set the integrand to zero at all points in the open domain.

3.1. The Axial Deformation Problem

Euler Bernoulli Beam Theory

Formal Solution

We have

$$[E_y Au'(x)]' = 0, \quad x \in (0, \ell),$$

$$E_y Au'(x) = 0, \quad x \in \{\ell\},$$


$$u(x) = 0, \quad x \in \{0\},$$

which can be solved by

$$E_y Au(x) = Tx, \quad \forall x \in [0, \ell].$$

(Notice that we now have closed brackets above)

- The stress at all points within the domain is $\sigma_x = E_y u' = \frac{T}{A}$.
- The above is a fact we may also have observed through drawing the free-body diagram, so this is not really world shattering news to us.

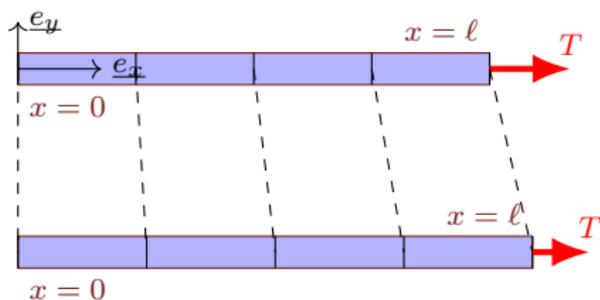

A Visualization of the Solution

3.2. The Euler Buckling Problem

Euler Bernoulli Beam Theory

- Let us now consider the prospect of small transverse deformation **in addition** to an existing axial field due to compression, $u(x)$ (this was $u(x) = \frac{T}{E_y A} x$ previously).
- In general, let the axial restoring force be denoted by $N(x) = E_y A u'(x)$ (this is just the axial stress σ_x integrated over the section), which can be a function of x .
- We shall assume that the transverse deformations are small enough so as not to affect the existing axial field.
- So the strain and stress fields are now written as:

Strain Field

$$\begin{aligned}\varepsilon_x &= u' - yv'' + \frac{v'^2}{2} \\ &= \frac{N}{E_y A} - yv'' + \frac{v'^2}{2}\end{aligned}$$

Stress Field

$$\begin{aligned}\sigma_x &= E_y u' - E_y yv'' + \frac{E_y}{2} v'^2 \\ &= \frac{N}{A} - E_y yv'' + \frac{E_y}{2} v'^2\end{aligned}$$

- When we consider variations on the strain field (we need this for δU), we will keep N fixed - i.e., the axially restoring force. So the **variational strain**, i.e., virtual strain is:

$$\delta\varepsilon_x = -y\delta v'' + v'\delta v'$$

- The virtual elastic work now gets expressed as

$$\delta U = \int_0^\ell \left(\int_{\mathcal{A}} \sigma_x \delta\varepsilon_x dA \right) dx.$$

3.2. The Euler Buckling Problem

Euler Bernoulli Beam Theory

Stress

$$\sigma_x = \frac{N}{A} - E_y y v'' + \frac{E_y}{2} v'^2$$

Virtual Strain

$$\delta \varepsilon_x = -y \delta v'' + v' \delta v'$$

Virtual Elastic Work

$$\delta U = \int_0^\ell \left(\int_{\mathcal{A}} \sigma_x \delta \varepsilon_x dA \right) dx.$$

- The section integral simplifies as:

$$\int_{\mathcal{A}} \sigma_x \delta \varepsilon_x dA = N v' \delta v' + E_y I_y v'' \delta v'' + \mathcal{O}(v^2),$$

where we have not pursued terms that are quadratic or higher order in v or its derivatives. (I show this in the appendix for post buckling)

- Using the above, the span integral can be simplified through the application of chain rule as

$$\begin{aligned} \delta U &= \int_0^\ell N v' \delta v' + E_y I_y v'' \delta v'' dx = \int_0^\ell -(N v')' \delta v - (E_y I_y v'')' \delta v' dx + N v' \delta v \Big|_{x=0}^\ell + E_y I_y v'' \delta v' \Big|_{x=0}^\ell \\ &= \int_0^\ell ((E_y I_y v'')'' - (N v')') \delta v dx + E_y I_y v'' \delta v' \Big|_{x=0}^\ell + (N v' - (E_y I_y v'')') \delta v \Big|_{x=0}^\ell \end{aligned}$$

3.2. The Euler Buckling Problem

Euler Bernoulli Beam Theory

Stress

$$\sigma_x = \frac{N}{A} - E_y y v'' + \frac{E_y}{2} v'^2$$

Virtual Strain

$$\delta \varepsilon_x = -y \delta v'' + v' \delta v'$$

Virtual Elastic Work

$$\delta U = \int_0^\ell \left(\int_{\mathcal{A}} \sigma_x \delta \varepsilon_x dA \right) dx.$$

- The section integral simplifies as:

$$\int_{\mathcal{A}} \sigma_x \delta \varepsilon_x dA = N v' \delta v' + E_y I_y v'' \delta v'' + \mathcal{O}(v^2),$$

where we have not pursued terms that are quadratic or higher order in v or its derivatives. (I show this in the appendix for post buckling)

- This term leads to be simplified through the application of chain

$$(E_y I_y v'')'' - (N v')' = 0, \quad x \in (0, \ell),$$

the general differential equation governing Euler Buckling.

$$\begin{aligned} \delta U &= \int_0^\ell \left((E_y I_y v'')'' - (N v')' \right) \delta v dx + E_y I_y v'' \delta v' \Big|_{x=0}^\ell + N v' \delta v \Big|_{x=0}^\ell + E_y I_y v'' \delta v' \Big|_{x=0}^\ell \\ &= \int_0^\ell \left((E_y I_y v'')'' - (N v')' \right) \delta v dx + E_y I_y v'' \delta v' \Big|_{x=0}^\ell + \left(N v' - (E_y I_y v'')' \right) \delta v \Big|_{x=0}^\ell \end{aligned}$$

3.2. The Euler Buckling Problem

Euler Bernoulli Beam Theory

Stress

$$\sigma_x = \frac{N}{A} - E_y y v'' + \frac{E_y}{2} v'^2$$

Virtual Strain

$$\delta \varepsilon_x = -y \delta v'' + v' \delta v'$$

Virtual Elastic Work

$$\delta U = \int_0^\ell \left(\int_A \sigma_x \delta \varepsilon_x dA \right) dx.$$

- The section integral simplifies as:

$$\int \sigma_x \delta \varepsilon_x dA = N v' \delta v' + E_y I_y v'' \delta v'' + \mathcal{O}(v^2),$$

This term leads to

where we have no higher order in v or its derivatives. (I should be $E_y I_y v'' = 0$ (or) $v' = \text{spec.}, x \in \{0, \ell\}$)

- Using the above, through the application of chain rule as

$$\begin{aligned} \delta U &= \int_0^\ell N v' \delta v' + E_y I_y v'' \delta v'' dx + N v' \delta v \Big|_{x=0}^\ell + E_y I_y v'' \delta v' \Big|_{x=0}^\ell \\ &= \int_0^\ell \left((E_y I_y v'')'' - (N v')' \right) \delta v dx + E_y I_y v'' \delta v' \Big|_{x=0}^\ell + \left(N v' - (E_y I_y v'')' \right) \delta v \Big|_{x=0}^\ell \end{aligned}$$

3.2. The Euler Buckling Problem

Euler Bernoulli Beam Theory

Stress

$$\sigma_x = \frac{N}{A} - E_y y v'' + \frac{E_y}{2} v'^2$$

Virtual Strain

$$\delta \varepsilon_x = -y \delta v'' + v' \delta v'$$

Virtual Elastic Work

$$\delta U = \int_0^\ell \left(\int_A \sigma_x \delta \varepsilon_x dA \right) dx.$$

- The section integral simplifies as:

$$\int_A \sigma_x \delta \varepsilon_x dA = N v' \delta v' + E_y I_y v'' \delta v'' + \mathcal{O}(v^2),$$

where we have not pursued term derivatives. (I show this in the

- Using the above, the span integral rule as

$$\begin{aligned} \delta U &= \int_0^\ell N v' \delta v' + E_y I_y v'' \delta v'' dx = \int_0^\ell \left((N v')' \delta v + (E_y I_y v'')' \delta v \right) dx + N v' \delta v \Big|_{x=0} + E_y I_y v'' \delta v' \Big|_{x=\ell} \\ &= \int_0^\ell \left((E_y I_y v'')'' - (N v')' \right) \delta v dx + E_y I_y v'' \delta v' \Big|_{x=0} + \left(N v' - (E_y I_y v'')' \right) \delta v \Big|_{x=\ell} \end{aligned}$$

This term leads to $(E_y I_y v'')' - N v' = 0$ (or) $v = \text{spec.}, x \in \{0, \ell\}$,
 i.e., either have the shear force equal to $N v'$ or restrict the transverse deformation at the ends.

chain

3.2. The Euler Buckling Problem

Euler Bernoulli Beam Theory

Stress

$$\sigma_x = \frac{N}{A} - E_y y v'' + \frac{E_y}{\rho} v'^2$$

Virtual Strain

$$\delta \varepsilon_x = -y \delta v'' + v' \delta v'$$

Virtual Elastic Work

$$\delta U = \int_0^\ell \left(\int_A \sigma_x \delta \varepsilon_x dA \right) dx.$$

The Final Set of Equilibrium Equations

- The second set of equilibrium equations is derived from the principle of virtual work. Applying the principle of virtual work we finally have

$$(E_y I_y v''')'' - (N v')' = 0, \quad x \in (0, \ell)$$

$$E_y I_y v'' = 0 \text{ (or) } v' = \text{spec.}, \quad x \in \{0, \ell\}$$

$$(E_y I_y v'')' - N v' = 0 \text{ (or) } v = \text{spec.}, \quad x \in \{0, \ell\}.$$


where
deriva

- Using the rule as before, we can write the equilibrium equations as:
 - Our study of buckling will be all about solutions for this with different combinations of boundary conditions.

$$\begin{aligned} \delta U &= \int_0^\ell N v' \delta v' + E_y I_y v'' \delta v'' dx = \int_0^\ell -(N v')' \delta v - (E_y I_y v'')' \delta v' dx + N v' \delta v \Big|_{x=0}^\ell + E_y I_y v'' \delta v' \Big|_{x=0}^\ell \\ &= \int_0^\ell ((E_y I_y v'')'' - (N v')') \delta v dx + E_y I_y v'' \delta v' \Big|_{x=0}^\ell + (N v' - (E_y I_y v'')') \delta v \Big|_{x=0}^\ell \end{aligned}$$

3.3. Equilibrium Equations Through Force Balance

Euler Bernoulli Beam Theory



We may pursue just a simple force balance and derive the equations also.

Equilibrium Equations

$$N' - (V\beta)' = 0$$

$$V' + N\beta' + N'\beta = 0$$


$$M' + V = 0$$

Assumption: $V\beta \ll N$

$$N' = 0$$

$$V' + N\beta' = 0$$

$$M'' - N\beta' = 0$$

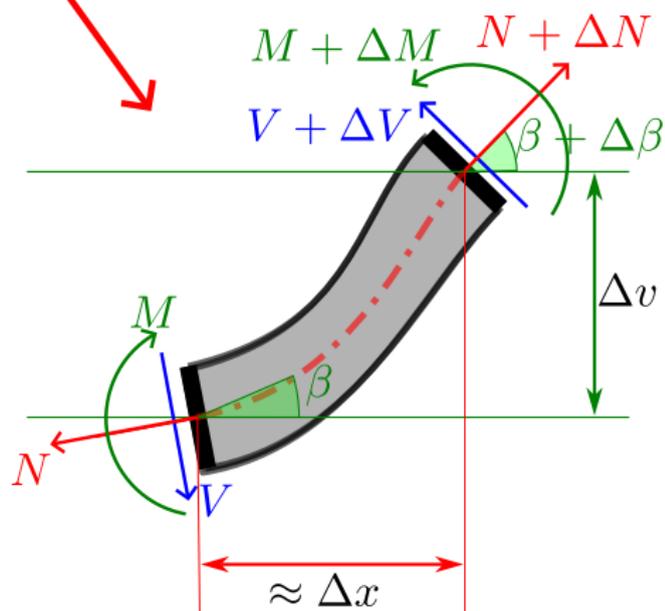

3.4. The Euler Buckling Problem

Euler Bernoulli Beam Theory

- For the Euler buckling problem, we consider a member under uniaxial compression so that $N(x) = -P \quad \forall x \in [0, \ell]$. Let us also assume constant properties ($E_y I_y$ and $E_y A$ do not vary with x).
- The governing equations in the $(0, \ell)$ domain reduce to

$$E_y I_y v'''' + P v'' = 0, \quad \text{with} \quad u(x) = -\frac{P}{E_y A} x \quad (\text{provided } u|_{x=0} = 0).$$

Axial Problem

- Boundary conditions representing axial compression:

$$u(x=0) = 0, \quad E_y A u'(x=\ell) = -P$$

- Solution:

$$u(x) = -\frac{P}{E_y A} x$$

General Solution to the Transverse Problem

- Substituting $N = -P$ we have,

$$v'''' + k^2 v'' = 0, \quad k^2 = \frac{P}{E_y I_y}.$$

- The general solution to this **Homogeneous ODE** are

$$v(x) = A_0 + A_1 x + A_2 \cos kx + A_3 \sin kx$$

- Boundary conditions on the transverse displacement function $v(x)$ are necessary to fix A_0, A_1, A_2, A_3 .

3.4.1. The Pinned-Pinned Column

The Euler Buckling Problem

- For a Pinned-pinned beam we have $v = 0$ on the ends and zero reaction moments at the supports:

$$v = 0, \quad x = \{0, \ell\}$$

$$v'' = 0, \quad x = \{0, \ell\}$$

- So the general solution reduces to

$$v(x) = A_3 \sin kx,$$

with the boundary condition

$$A_3 \sin k\ell = 0.$$

- Apart from the trivial solution ($A_3 = 0$) we have

$$k_{(n)}\ell = n\pi \implies k_n = n\frac{\pi}{\ell}$$

or in terms of the compressive load P ,

$$P_{cr,n} = n^2 \frac{\pi^2 E_y I_y}{\ell^2}$$

- Interpretation:** If $P \neq P_{cr,n}$, $A_3 = 0$ to satisfy boundary conditions. **But for $P = P_{cr,n}$, A_3 CAN BE ANYTHING!**


3.4.1. The Pinned-Pinned Column

The Euler Buckling Problem

- For a Pinned-Pinned column on the ends and the supports:

- So the general

with the bound

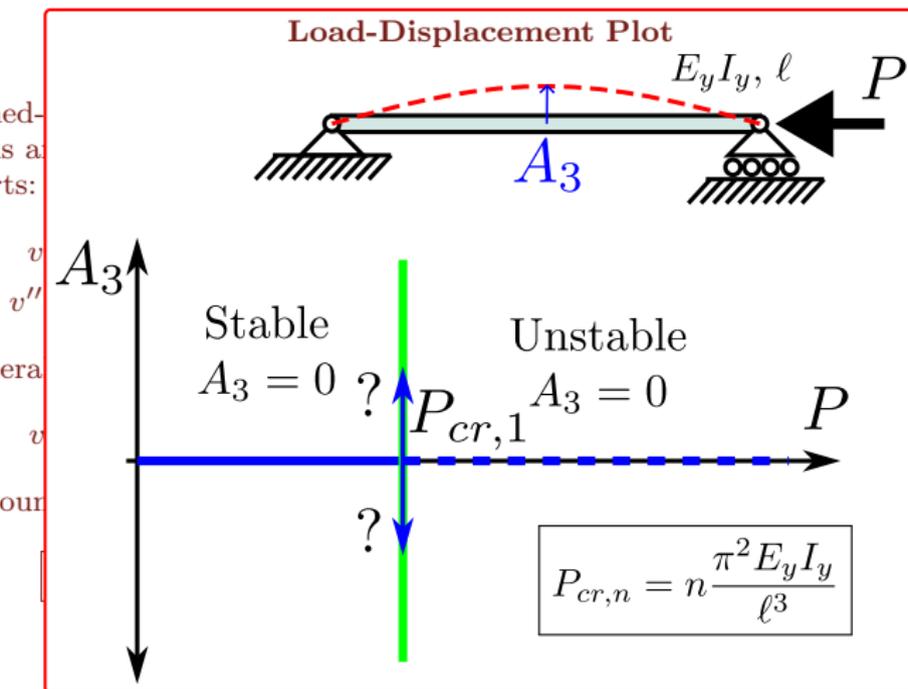

ion ($A_3 = 0$)

$$= n \frac{\pi}{l}$$

ve load P ,

$\frac{I_y}{l^3}$

, n , $A_3 = 0$ to

But for
NOTHING!

3.4.1. The Pinned-Pinned Column: The Imperfect Case I

The Euler Buckling Problem

- Suppose there are initial imperfections in the beam's neutral axis such that the neutral axis can be written as $v_0(x)$. The deformation field and the resulting strain in this case can be written as

$$u_x = u - \overbrace{(y - v_0)}^{\tilde{y}} v', \quad u_y = v, \quad \Longrightarrow \quad \boxed{\varepsilon_x = u' - \tilde{y}v'' + v'_0 v' + \frac{v'^2}{2}}.$$

- Replacing $u' = \frac{N}{E_y A}$, the stress becomes $\sigma_x = \frac{N}{A} - E_y \tilde{y}v'' + E_y v'_0 v' + E_y \frac{v'^2}{2}$. The associated virtual work is written (excluding quadratic and higher order terms) as

$$\begin{aligned} \delta W &= - \int_0^\ell N v'_0 \delta v' + N v' \delta v' + E_y I_y v'' \delta v'' dx \\ &= - \int_0^\ell \left((E_y I_y v'')'' - (N(v'_0 + v'))' \right) \delta v dx - (E_y I_y v'') \delta v' \Big|_{x=0}^\ell \\ &\quad + \left((E_y I_y v'')' - N(v' + v'_0) \right) \delta v \Big|_{x=0}^\ell \end{aligned}$$

Note that we have dropped all terms with $\mathcal{O}(v^2)$, $\mathcal{O}(vv_0)$, $\mathcal{O}(v_0^2)$ and above for this. ◀ ◻ ▶

3.4.1. The Pinned-Pinned Column: The Imperfect Case II

The Euler Buckling Problem

- The governing equations for equilibrium (requiring work stationarity, $\delta W = 0$) can be expressed as

$$(E_y I_y v'')'' - (N(v'_0 + v'))' = 0, \quad x \in (0, \ell)$$

$$E_y I_y v'' = 0 \quad (\text{or}) \quad v' = \text{spec.}, \quad x \in \{0, \ell\}$$

$$(E_y I_y v'')' - N(v' + v'_0) = 0 \quad (\text{or}) \quad v = \text{spec.}, \quad x \in \{0, \ell\}$$

- For the constant parameters compressive case, the differential equation can be expressed as

$$E_y I_y v'''' + P(v'' + v''_0) = 0$$

or, in more convenient notation,

$$v'''' + k^2 v'' = -k^2 v''''.$$

3.4.1. The Pinned-Pinned Column: The Imperfect Case III

The Euler Buckling Problem

- Describing the imperfect neutral axis using an infinite series,

$$v_0 = \sum_n C_n \sin\left(n \frac{\pi x}{\ell}\right) \quad \left(\Rightarrow v_0'' = - \sum_n \left(n \frac{\pi}{\ell}\right)^2 C_n \sin\left(n \frac{\pi x}{\ell}\right) \right),$$

the governing equations become

$$v'''' + k^2 v'' = \sum_n k^2 \left(n \frac{\pi}{\ell}\right)^2 C_n \sin\left(n \frac{\pi x}{\ell}\right).$$

- This is solved by,

$$\begin{aligned} v(x) &= \sum_n \frac{k^2}{\left(n \frac{\pi}{\ell}\right)^2 - k^2} C_n \sin\left(n \frac{\pi x}{\ell}\right) \\ &= \sum_n \frac{P}{\frac{n^2 \pi^2 E_y I_y}{\ell^2} - P} C_n \sin\left(n \frac{\pi x}{\ell}\right) = \sum_n \frac{P}{P_{cr,n} - P} C_n \sin\left(n \frac{\pi x}{\ell}\right) \end{aligned}$$


3.4.1. The Pinned-Pinned Column: The Imperfect Case

The Euler Buckling Problem

- Look carefully at the solution

$$v(x) = \sum_n \frac{P}{P_{cr,n} - P} C_n \sin(n \frac{\pi x}{\ell}).$$

- Clearly $P \rightarrow P_{cr,n}$ are **singularities**. Even for very small C_n , the “blow-up” is huge.

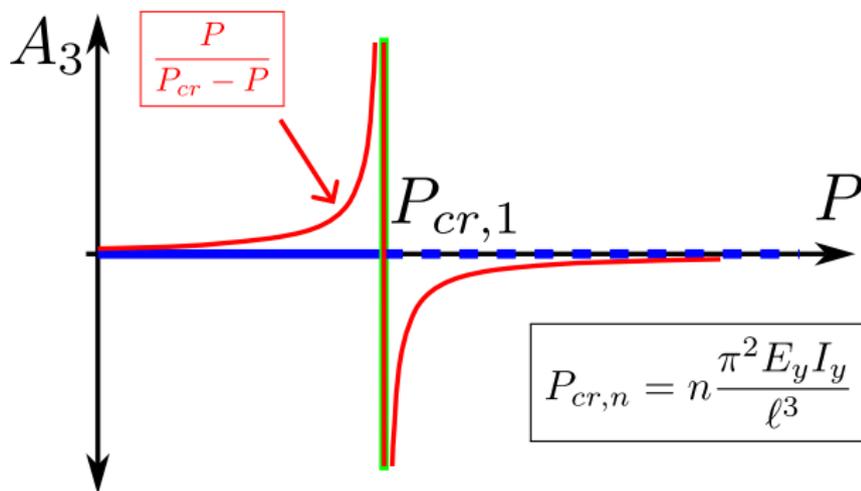

3.4.2. The Southwell Plot

The Euler Buckling Problem


- The deformation amplitude at the mid-point is given as (for $P < P_{cr,1}$),

$$\Delta \approx \frac{P}{P_{cr,1} - P} C_1 = \frac{C_1}{\frac{P_{cr,1}}{P} - 1}$$

$$\Rightarrow \Delta = P_{cr,1} \frac{\delta}{P} - C_1$$


The Southwell Plot

- Plotting Δ vs $\frac{\Delta}{P}$ allows **Non-Destructive Evaluation of the critical load**
- $P_{cr,1}$ is estimated without having to buckle the column

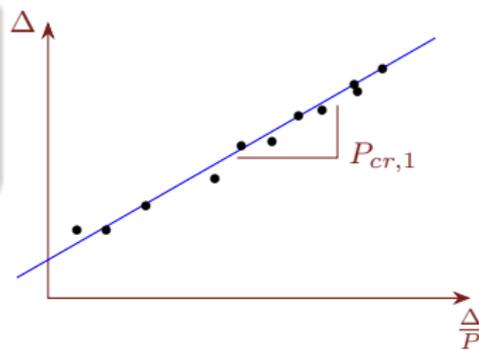

3.4.3. The Clamped-Clamped Column

The Euler Buckling Problem

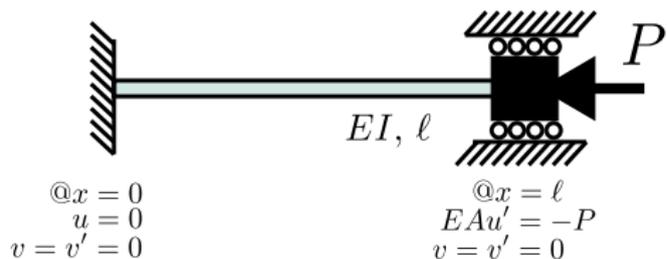

- The axial solution is the same as before:
 $u(x) = -\frac{P}{E_y A} x$.
- The transverse general solution also has the same form but boundary conditions are different.

$$\begin{bmatrix} v(x) \\ v'(x) \end{bmatrix} = \begin{bmatrix} 1 & x & \cos(kx) & \sin(kx) \\ 0 & 1 & -k \sin(kx) & k \cos(kx) \end{bmatrix} \begin{bmatrix} A_0 \\ A_1 \\ A_2 \\ A_3 \end{bmatrix}$$

- The boundary conditions may be expressed as

$$\underbrace{\begin{bmatrix} 1 & 0 & 1 & 0 \\ 0 & 1 & 0 & k \\ 1 & \ell & \cos(k\ell) & \sin(k\ell) \\ 0 & 1 & -k \sin(k\ell) & k \cos(k\ell) \end{bmatrix}}_{\underline{\underline{M}}} \begin{bmatrix} A_0 \\ A_1 \\ A_2 \\ A_3 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}$$

- There can be non-trivial solutions only when $\underline{\underline{M}}$ is singular, i.e., **for choices of k such that $\Delta(\underline{\underline{M}}) = 0$.**

The Eigenvalue Problem

This problem setting of finding k such that $\Delta(\underline{\underline{M}}(k)) = 0$ is known as an **eigenvalue problem**.

3.4.3. The Clamped-Clamped Column

The Euler Buckling Problem



• The boundary conditions may be expressed as

Aside: Eigenvalue Problems ($\underline{\underline{M}} \in \mathbf{R}^{d \times d}$)

Linear Eigenvalue Problem (d eigenvalues)

$$\underline{\underline{M}}(k) = \underline{\underline{M}}_0 + k\underline{\underline{M}}_1$$

Quadratic Eigenvalue Problem ($2d$ eigenvalues)

$$\underline{\underline{M}}(k) = \underline{\underline{M}}_0 + k\underline{\underline{M}}_1 + k^2\underline{\underline{M}}_2$$

• The axial displacement $u(x) = \dots$

• The transverse displacement $v(x)$ and its derivative $v'(x)$ are different at the boundaries.

at $x = 0$
 $u = 0$
 $v = v' = 0$

at $x = L$
 $u = 0$
 $v = 0$

$$\begin{bmatrix} v(x) \\ v'(x) \end{bmatrix} = \begin{bmatrix} 0 & 1 & -k \sin(kx) & k \cos(kx) \end{bmatrix} \begin{bmatrix} A_1 \\ A_2 \\ A_3 \end{bmatrix}$$

problem.

3.4.3. The Clamped-Clamped Column

The Euler Buckling Problem



• The boundary conditions may be expressed as

Aside: Eigenvalue Problems ($\underline{\underline{M}} \in \mathbf{R}^{d \times d}$)

Linear Eigenvalue Problem (d eigenvalues)

$$\underline{\underline{M}}(k) = \underline{\underline{M}}_0 + k\underline{\underline{M}}_1$$

Quadratic Eigenvalue Problem ($2d$ eigenvalues)

$$\underline{\underline{M}}(k) = \underline{\underline{M}}_0 + k\underline{\underline{M}}_1 + k^2\underline{\underline{M}}_2$$

Our matrix $\underline{\underline{M}}(k)$ has k -dependency in terms of k , $\sin(k\ell)$, $\cos(k\ell)$, making this a **Nonlinear Eigenvalue Problem**.

• $\Rightarrow \infty$ eigenvalues here (not always though!)

problem.

• The axial displacement $u(x) = \dots$

• The transverse displacement $v(x)$ and its derivative $v'(x)$ are different at the ends.

Boundary conditions at $x=0$:

$$\begin{aligned} @x = 0 \\ u = 0 \\ v = v' = 0 \end{aligned}$$

Boundary conditions at $x=l$:

$$\begin{bmatrix} v(x) \\ v'(x) \end{bmatrix} = \begin{bmatrix} 0 & 1 & -k \sin(kx) & k \cos(kx) \end{bmatrix} \begin{bmatrix} A_1 \\ A_2 \\ A_3 \end{bmatrix}$$

Boundary conditions at $x=l$ (from the diagram):

$$\begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}$$

Boundary conditions at $x=l$ (from the text):

only choices

that true

3.4.3. The Clamped-Clamped Column I

The Euler Buckling Problem

- We proceed to solve this as,

$$\Delta \left(\begin{bmatrix} 1 & 0 & 1 & 0 \\ 0 & 1 & 0 & k \\ 1 & \ell & \cos(k\ell) & \sin(k\ell) \\ 0 & 1 & -k \sin(k\ell) & k \cos(k\ell) \end{bmatrix} \right) = -k (k\ell \sin(k\ell) + 2 \cos(k\ell) - 2)$$

- We set it to zero through the following factorizations:

$$\begin{aligned} \Delta(\underline{\underline{M}}(k)) &= -k \left(2k\ell \sin\left(\frac{k\ell}{2}\right) \cos\left(\frac{k\ell}{2}\right) - 4 \sin^2\left(\frac{k\ell}{2}\right) \right) \\ &= -2k \sin\left(\frac{k\ell}{2}\right) \left(k\ell \cos\left(\frac{k\ell}{2}\right) - 2 \sin\left(\frac{k\ell}{2}\right) \right) = 0 \\ \implies \boxed{\sin\left(\frac{k\ell}{2}\right) = 0}, \quad (\text{or}) \quad \boxed{\tan\left(\frac{k\ell}{2}\right) = \frac{k\ell}{2}}. \end{aligned}$$

- Two “classes” of solutions emerge:

$$\textcircled{1} \sin\left(\frac{k\ell}{2}\right) = 0 \implies \frac{k_n \ell}{2} = n\pi \implies \boxed{P_n^{(1)} = 4n^2 \frac{\pi^2 EI}{\ell^2}}$$

$$\textcircled{2} \tan\left(\frac{k\ell}{2}\right) = \frac{k\ell}{2} \implies \frac{k_n \ell}{2} \approx 0, 4.49, 7.72, \dots \implies P_1^{(2)} \approx 8.98 \frac{\pi^2 EI}{\ell^2}$$

3.4.3. The Clamped-Clamped Column II

The Euler Buckling Problem

- The smallest critical load is $P_n^{(1)} = 4 \frac{\pi^2 EI}{\ell^2} = \frac{\pi^2 EI}{(\frac{\ell}{2})^2}$.

Concept of “Effective Length”

- **Question:** If the beam were simply supported, what would be the length such that it also has the same first critical load?
- Here it comes out to be $\ell_{eff} = \frac{\ell}{2}$.
- The column clamped on both ends can take the same buckling load as a column that is pinned on both ends with half the length.

3.4.3. The Clamped-Clamped Column III

The Euler Buckling Problem

Boundary conditions	Critical load P_{cr}	Deflection mode shape	Effective length KL
Simple support– simple support	$\frac{\pi^2 EI}{L^2}$		L
Clamped-clamped	$4 \frac{\pi^2 EI}{L^2}$		$\frac{1}{2}L$
Clamped–simple support	$2.04 \frac{\pi^2 EI}{L^2}$		$0.70L$
Clamped-free	$\frac{1}{4} \frac{\pi^2 EI}{L^2}$		$2L$

Effective lengths of beams with different boundary conditions (Figure from Brush and Almroth 1975)

Self-Study

- Derive the effective length for the clamped-simply supported and clamped-free columns.

3.4.3. The Clamped-Clamped Column: The Mode-shape

The Euler Buckling Problem

- Let us substitute $k_1 = \frac{2\pi}{\ell}$ into the matrix $\underline{\underline{M}}(k_1)$ so that the boundary conditions now read as

$$\begin{bmatrix} 1 & 0 & 1 & 0 \\ 0 & 1 & 0 & \frac{2\pi}{\ell} \\ 1 & \ell & 1 & 0 \\ 0 & 1 & 0 & \frac{2\pi}{\ell} \end{bmatrix} \begin{bmatrix} A_0 \\ A_1 \\ A_2 \\ A_3 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}.$$

- This implies the following:

$$A_1 = 0, \quad A_3 = 0, \quad A_2 = -A_0.$$

- So, if $k = k_1$, the solution has to be the following to satisfy the boundary conditions:

$$v = A_0 \left(1 - \cos \left(\frac{2\pi x}{\ell} \right) \right) \equiv A_0 \sin^2 \left(\frac{\pi x}{\ell} \right)$$

Note: $\sin^2 \left(\frac{\pi x}{\ell} \right)$ is also referred to as the **eigenfunction** corresponding to the eigenvalue $k_1 = \frac{2\pi}{\ell}$.

3.4.3. The Clamped-Clamped Column: The Mode-shape

The Euler Buckling Problem

- Let us substitute $k_1 = \frac{2\pi}{\ell}$ into the matrix $\underline{\underline{M}}(k_1)$ so that the boundary conditions now read as


$$\begin{bmatrix} 1 & 0 & 1 & 0 \\ 0 & 1 & 0 & \frac{2\pi}{\ell} \\ 1 & \ell & 1 & 0 \end{bmatrix} \begin{bmatrix} A_0 \\ A_1 \\ A_2 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}.$$

Buckling mode-shape

- This implies

- So, if $k =$

$$\begin{aligned} @x = 0 \\ u = 0 \\ v = v' = 0 \end{aligned}$$

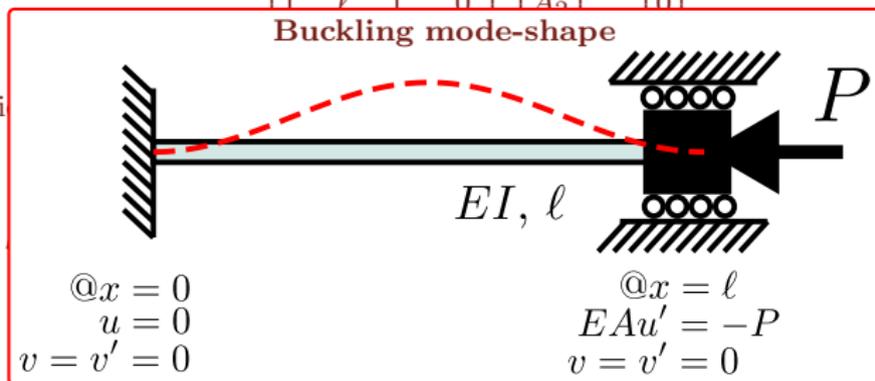

$$\begin{aligned} @x = \ell \\ EAu' = -P \\ v = v' = 0 \end{aligned}$$

boundary conditions:

Note: $\sin^2\left(\frac{\pi x}{\ell}\right)$ is also referred to as the **eigenfunction** corresponding to the eigenvalue $k_1 = \frac{2\pi}{\ell}$.


4. Snap-Through Buckling

- Let's try out the principle of virtual work on a slightly more complicated example now.
- We will consider the SDoF model to the right (from Wiebe et al. 2011).
- The strain energy on the springs (two) is

$$U(v) = 2 \frac{k}{2} \Delta x^2 = k \left(\sqrt{L^2 - v_0^2} - \sqrt{L^2 - v^2} \right)^2.$$

- The work done by the applied load is given by,

$$\Pi(v) = Fv.$$

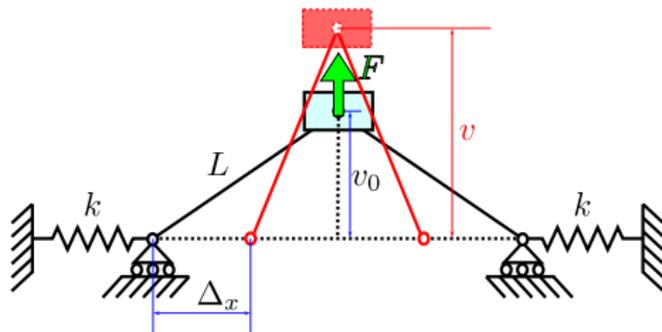


Setting $\frac{dW}{dv} = 0$ we get

$$F = -2kv \left(1 - \sqrt{\frac{L^2 - v_0^2}{L^2 - v^2}} \right).$$


4. Snap-Through Buckling

- Instead of an analytical treatment, we will use **Graphical Inspection** to understand this function.

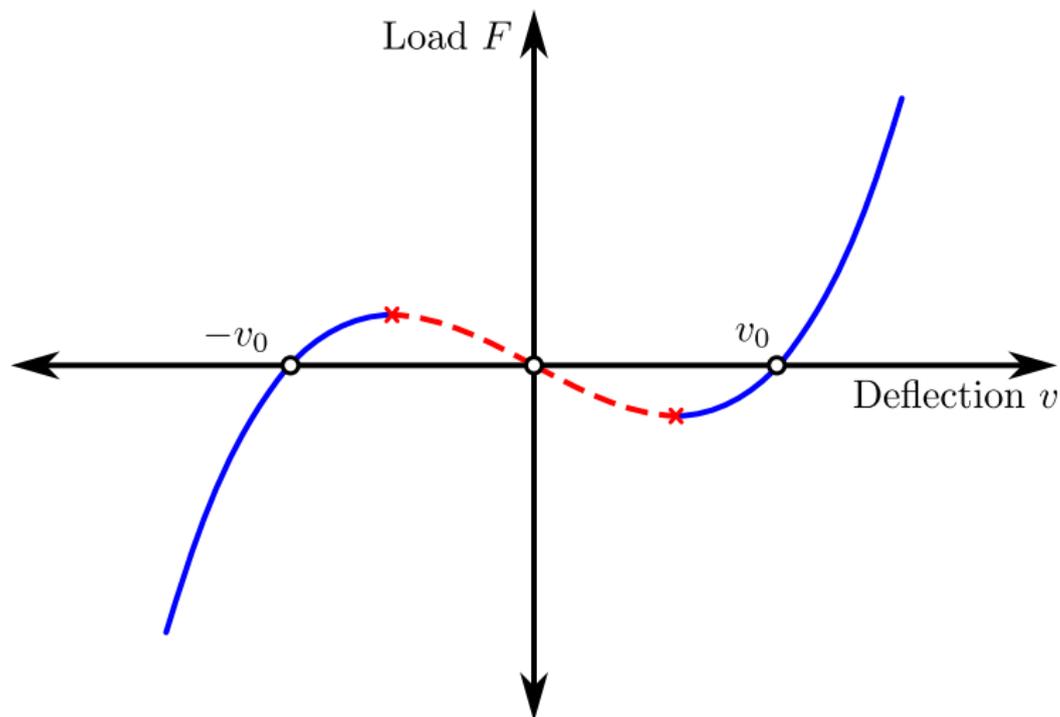


4. Snap-Through Buckling

- Instead of an analytical treatment, we will use **Graphical Inspection** to understand this function.

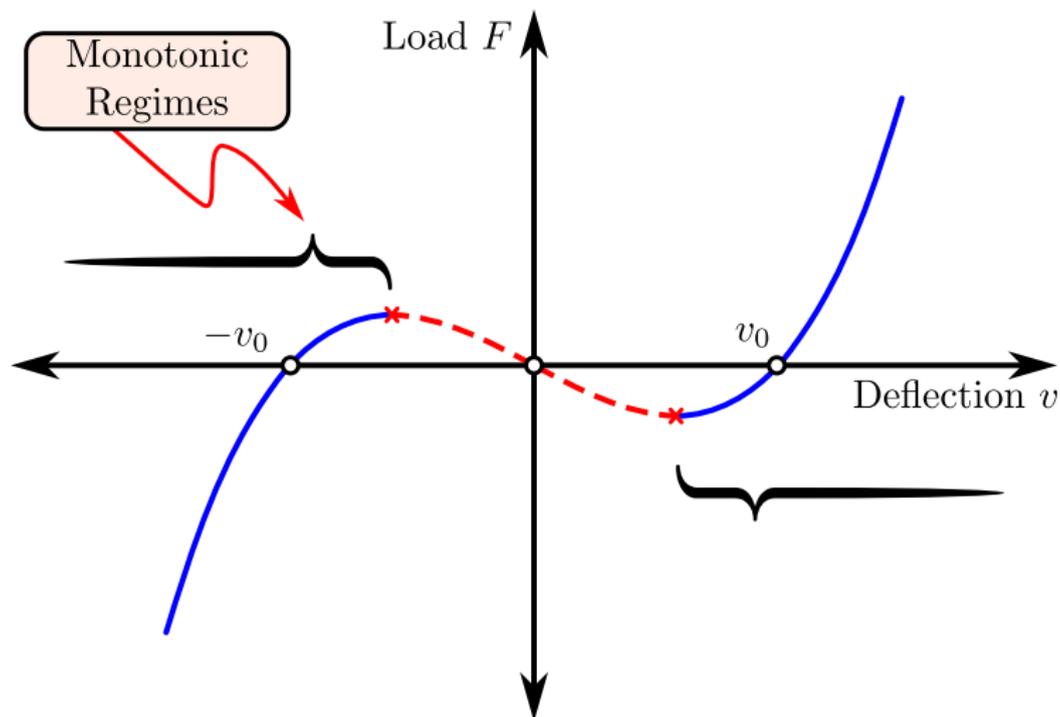


4. Snap-Through Buckling

- Instead of an analytical treatment, we will use **Graphical Inspection** to understand this function.

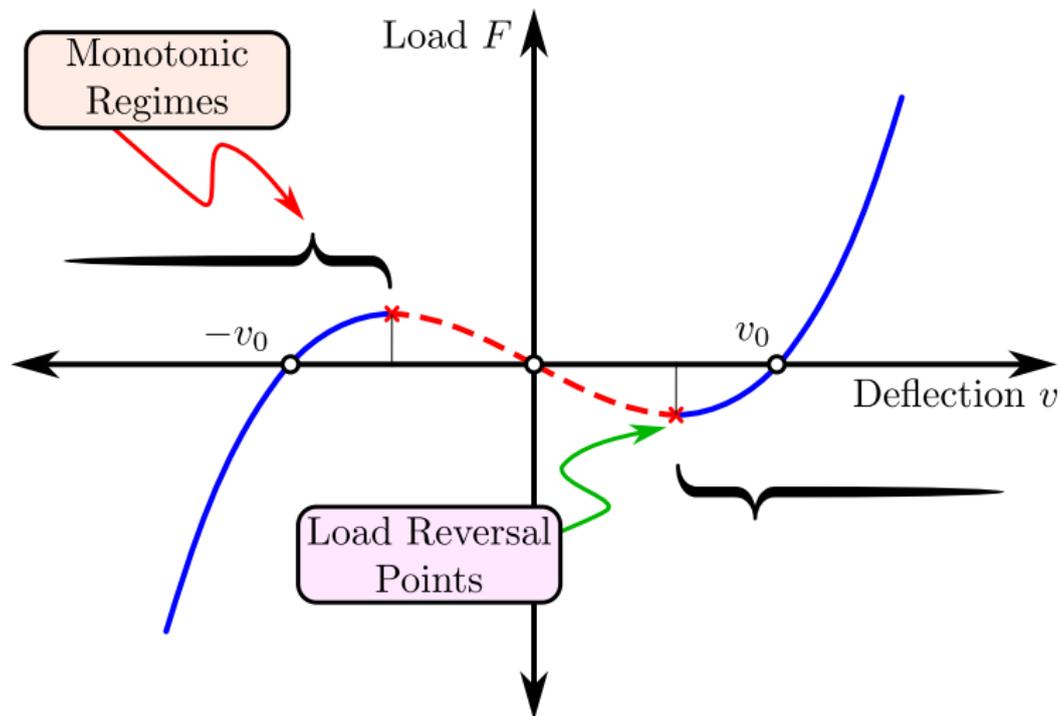


4. Snap-Through Buckling

- Instead of an analytical treatment, we will use **Graphical Inspection** to understand this function.

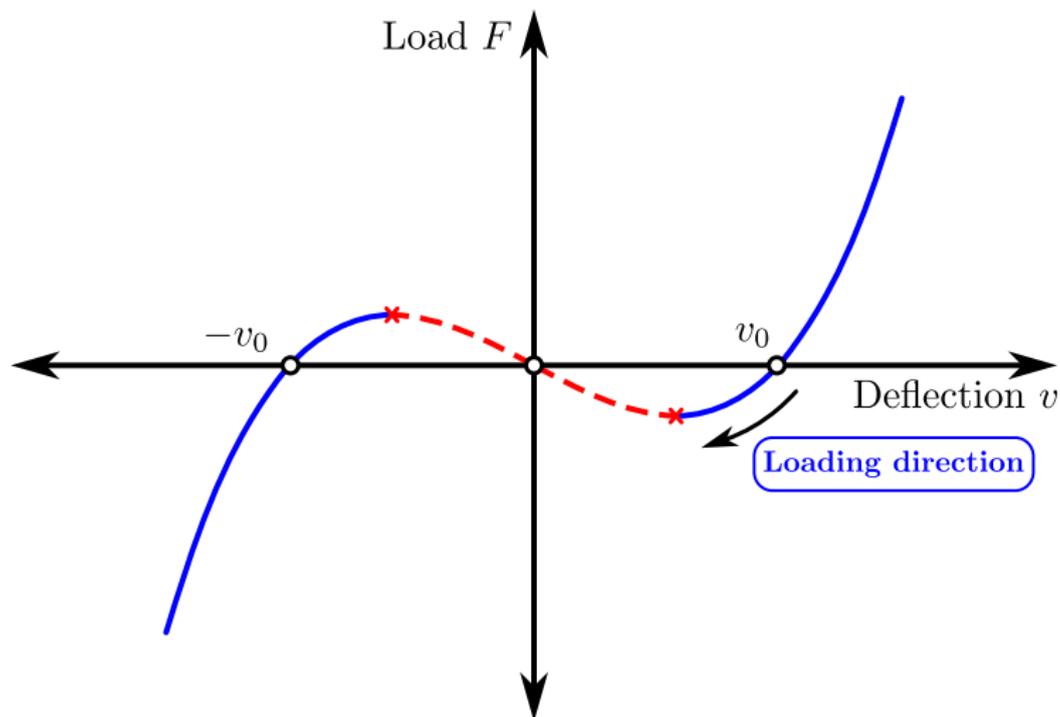


4. Snap-Through Buckling

- Instead of an analytical treatment, we will use **Graphical Inspection** to understand this function.

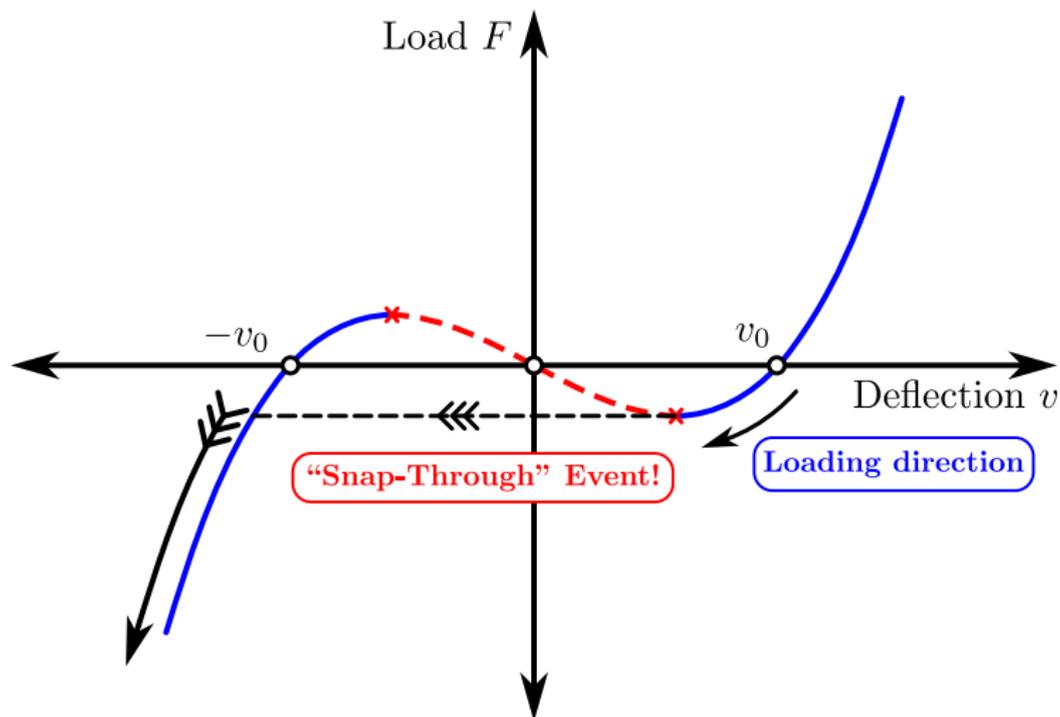



4. Snap-Through Buckling

- Instead of an analytical treatment, we will use **Graphical Inspection** to understand this function.

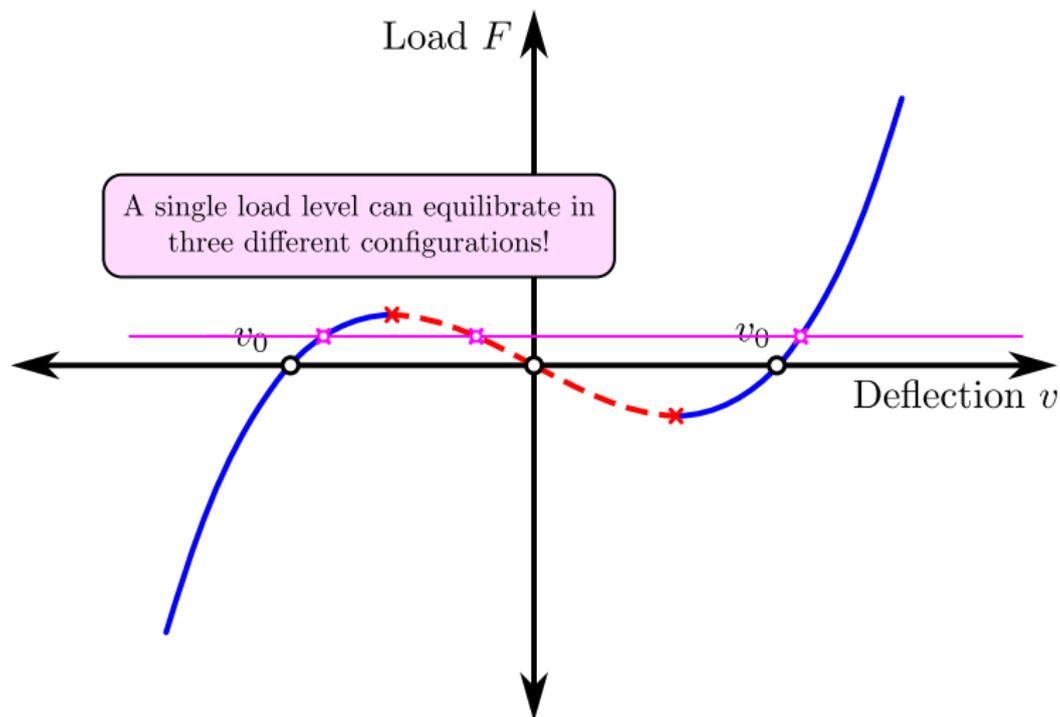

4: Equilibrium Visualization



Snap-Through Buckling

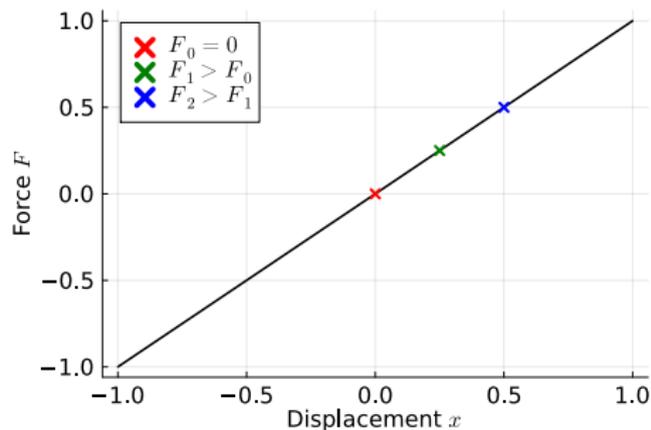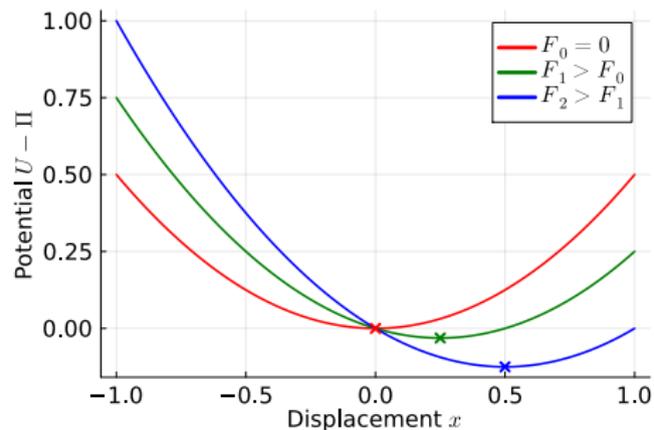

$$\text{Linear System: } U - \Pi = \frac{k}{2}x^2 - Fx$$

4: Equilibrium Visualization


Snap-Through Buckling

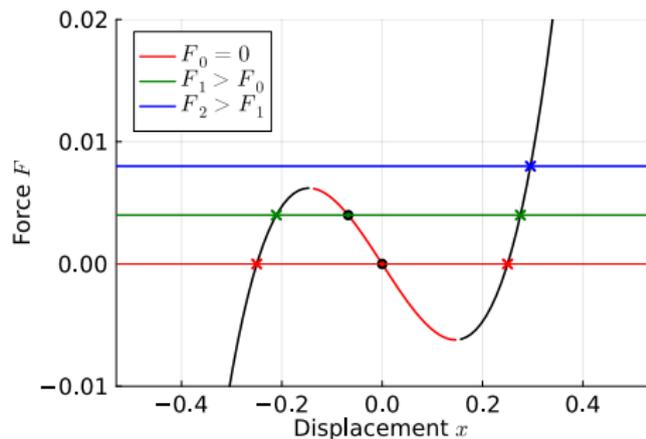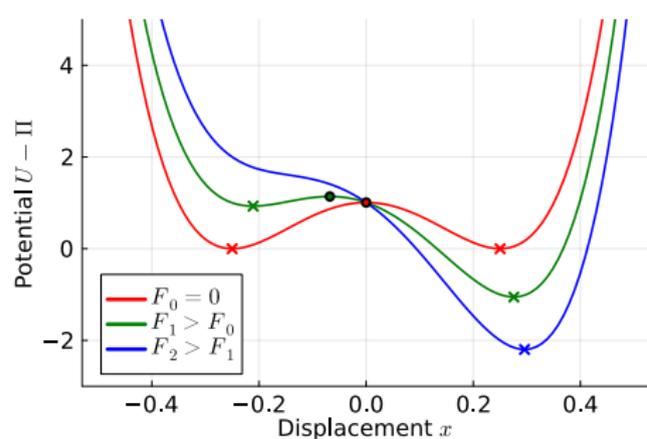

$$\text{Snap-Through Problem: } U - \Pi = k(\sqrt{L^2 - v_0^2} - \sqrt{L^2 - v^2})^2 - Fx$$

5.1. Plate Buckling

Governing Equations

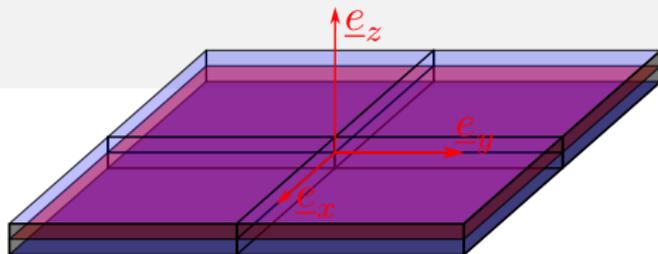

- Kirchhoff-Love Plate Theory.
- **Kinematic Assumptions:** Lines along section-thickness deform as lines and stay perpendicular to the neutral axis.
- Governing equations for the uniform case can be written in the form (derivation follows)


$$\frac{Et^3}{12(1-\nu^2)}(w_{,xxxx} + w_{,yyyy} + 2w_{,xxyy}) - (N_{xx}w_{,xx} + N_{yy}w_{,yy} + 2N_{xy}w_{,xy}) = 0$$

$$D\nabla^4 w - (N_{xx}w_{,xx} + N_{yy}w_{,yy} + 2N_{xy}w_{,xy}) = 0$$

- This is all that is needed to conduct buckling analysis - the procedure is identical as above!

5.1. Plate Buckling

Governing Equations

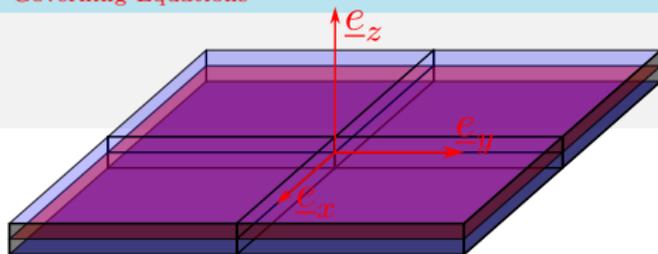

- Under plane stress conditions ($\sigma_{zz} = 0$, applicable for thin plates), the 2D constitutive relationship can be written as

$$\begin{bmatrix} \epsilon_{xx} \\ \epsilon_{yy} \\ \gamma_{xy} \end{bmatrix} = \frac{1}{E_y} \begin{bmatrix} 1 & -\nu & 0 \\ -\nu & 1 & 0 \\ 0 & 0 & 2(1+\nu) \end{bmatrix} \begin{bmatrix} \sigma_{xx} \\ \sigma_{yy} \\ \sigma_{xy} \end{bmatrix} \implies \begin{bmatrix} \sigma_{xx} \\ \sigma_{yy} \\ \sigma_{xy} \end{bmatrix} = \frac{E_y}{1-\nu^2} \begin{bmatrix} 1 & \nu & 0 \\ \nu & 1 & 0 \\ 0 & 0 & \frac{1-\nu}{2} \end{bmatrix} \begin{bmatrix} \epsilon_{xx} \\ \epsilon_{yy} \\ \epsilon_{xy} \end{bmatrix}$$

- We shall use the above constitutive relationship for deriving the governing equations just as we did for beams: **in plane problem gets solved separately first, then we include the out-of-plane deformations.**
- The overall deformation field is

$$U_x = u_x(x, y) + z\theta_y(x, y), \quad U_y = u_y(x, y) - z\theta_x(x, y), \quad U_z = w(x, y).$$

- The Kirchhoff kinematic assumption here is to set $\gamma_{xz} = 0$ and $\gamma_{yz} = 0$. This implies $\theta_x = w_{,y}$ and $\theta_y = -w_{,x}$. Using this, the overall deformation field is written as:

$$U_x = u_x - zw_{,x}, \quad U_y = u_y - zw_{,y}, \quad U_z = w.$$

5.2. In Plane Deformations

Plate Buckling

- Firstly we consider purely in-plane deformations. Here, the deformation field and the corresponding strains can be expressed as

$$U_x = u_x(x, y), \quad U_y = u_y(x, y), \quad U_z = 0, \quad \begin{bmatrix} \varepsilon_{xx} \\ \varepsilon_{yy} \\ \varepsilon_{xy} \end{bmatrix} = \begin{bmatrix} u_{x,x} \\ u_{y,y} \\ u_{x,y} + u_{y,x} \end{bmatrix}.$$

- There are 3 in-plane stress components that can be enforced: 2 “axial” stresses σ_{xx}, σ_{yy} and 1 shear stress σ_{xy} . We define load densities $N_{xx}(x, y), N_{yy}(x, y), N_{xy}(x, y)$ such that

$$\sigma_{xx} = \frac{N_{xx}}{t}, \quad \sigma_{yy} = \frac{N_{yy}}{t}, \quad \sigma_{xy} = \frac{N_{xy}}{t},$$

where t is the thickness of the plate (which can also vary as $t(x, y)$).

- Substituting this back in the constitutive relationship, we have

$$\begin{bmatrix} \varepsilon_{xx} \\ \varepsilon_{yy} \\ \gamma_{xy} \end{bmatrix} = \begin{bmatrix} u_{x,x} \\ u_{y,y} \\ u_{x,y} + u_{y,x} \end{bmatrix} = \frac{1}{E_y t} \begin{bmatrix} 1 & -\nu & 0 \\ -\nu & 1 & 0 \\ 0 & 0 & 2(1 + \nu) \end{bmatrix} \begin{bmatrix} N_{xx} \\ N_{yy} \\ N_{xy} \end{bmatrix}.$$

5.3. Out-of-Plane Deformations

Plate Buckling

- We now write out the strains of the general case:

$$\begin{aligned}
 U_x &= u_x - zw_{,x}, & U_y &= u_y - zw_{,y}, & U_z &= w \\
 \Rightarrow \begin{bmatrix} \varepsilon_{xx} \\ \varepsilon_{yy} \\ \gamma_{xy} \end{bmatrix} &= \begin{bmatrix} u_{x,x} \\ u_{y,y} \\ u_{x,y} + u_{y,x} \end{bmatrix} - z \begin{bmatrix} w_{,xx} \\ w_{,yy} \\ 2w_{,xy} \end{bmatrix} + \frac{1}{2} \begin{bmatrix} w_{,x}^2 \\ w_{,y}^2 \\ 2w_{,x}w_{,y} \end{bmatrix}
 \end{aligned}$$

We have here included **nonlinear Von Karman strains** which encode geometrical nonlinearities just like they did for beams.

- The corresponding stresses are

$$\begin{bmatrix} \sigma_{xx} \\ \sigma_{yy} \\ \sigma_{xy} \end{bmatrix} = \frac{1}{t} \begin{bmatrix} N_{xx} \\ N_{yy} \\ N_{xy} \end{bmatrix} - \frac{E_y z}{1 - \nu^2} \begin{bmatrix} 1 & \nu & 0 \\ \nu & 1 & 0 \\ 0 & 0 & \frac{1-\nu}{2} \end{bmatrix} \begin{bmatrix} w_{,xx} \\ w_{,yy} \\ 2w_{,xy} \end{bmatrix},$$

where we only retain the linear terms in stress.

- The virtual strains are written as

$$\begin{bmatrix} \delta\varepsilon_{xx} \\ \delta\varepsilon_{yy} \\ \delta\gamma_{xy} \end{bmatrix} = -z \begin{bmatrix} \delta w_{,xx} \\ \delta w_{,yy} \\ 2\delta w_{,xy} \end{bmatrix} + \begin{bmatrix} w_{,x}\delta w_{,x} \\ w_{,y}\delta w_{,y} \\ w_{,x}\delta w_{,y} + w_{,y}\delta w_{,x} \end{bmatrix}.$$

5.3. Out-of-Plane Deformations

Plate Buckling

- Shortening the notation, the quantities can be expressed as

$$\underline{\sigma} = \frac{N}{t} - z \underline{\mathbb{C}} \underline{w}'', \quad \delta \underline{\varepsilon} = -z \delta \underline{w}'' + \begin{bmatrix} w_{,x} \\ 0 \\ w_{,y} \end{bmatrix} \delta w_{,x} + \begin{bmatrix} 0 \\ w_{,y} \\ w_{,x} \end{bmatrix} \delta w_{,y}$$

with $\underline{w}'' = [w_{,xx} \quad w_{,yy} \quad 2w_{,xy}]^T$.

- The virtual work expression is written as:

$$\begin{aligned} \delta W &= - \int \int \left(\int_{-\frac{t}{2}}^{\frac{t}{2}} \underline{\sigma}^T \delta \underline{\varepsilon} dz \right) dx dy \\ &= - \int \int \left(\int_{-\frac{t}{2}}^{\frac{t}{2}} z^2 \underline{w}''^T \underline{\mathbb{C}}^T \delta \underline{w}'' + \frac{1}{t} \begin{bmatrix} N_{xx} w_{,x} \\ 0 \\ N_{xy} w_{,y} \end{bmatrix} \delta w_{,x} + \frac{1}{t} \begin{bmatrix} 0 \\ N_{yy} w_{,y} \\ N_{xy} w_{,x} \end{bmatrix} \delta w_{,y} dz \right) dx dy \\ &= - \int \int \frac{t^3}{12} \delta \underline{w}''^T \underline{\mathbb{C}} \underline{w}'' + \begin{bmatrix} N_{xx} w_{,x} \\ 0 \\ N_{xy} w_{,y} \end{bmatrix} \delta w_{,x} + \begin{bmatrix} 0 \\ N_{yy} w_{,y} \\ N_{xy} w_{,x} \end{bmatrix} \delta w_{,y} dx dy \end{aligned}$$

We have dropped the $\mathcal{O}(z)$ terms because they will anyway disappear after the integral over the thickness.

5.3. Out-of-Plane Deformations

Plate Buckling

- Replacing the double integral by an integral over a 2D domain $\Omega \subset \mathbb{R}^2$ lets us write the virtual work in more convenient notation:


$$\begin{aligned} \delta W &= - \int_{\Omega} \frac{t^3}{12} \delta \underline{w}''^T \underline{\mathbb{C}} \underline{w}'' + (N_{xx} w_{,x} + N_{xy} w_{,y}) \delta w_{,x} + (N_{yy} w_{,y} + N_{xy} w_{,x}) \delta w_{,y} d\Omega \\ &= - \int_{\Omega} \frac{E_y t^3}{12(1-\nu^2)} \left([1 \quad \nu \quad 0] \delta w_{,xx} + [\nu \quad 1 \quad 0] \delta w_{,yy} \right. \\ &\quad \left. + [0 \quad 0 \quad \frac{1-\nu}{2}] \delta w_{,xy} \right) \begin{bmatrix} w_{,xx} \\ w_{,yy} \\ 2w_{,xy} \end{bmatrix} d\Omega \\ &\quad - \int_{\Omega} (N_{xx} w_{,x} + N_{xy} w_{,y}) \delta w_{,x} + (N_{yy} w_{,y} + N_{xy} w_{,x}) \delta w_{,y} d\Omega. \end{aligned}$$

- Now we denote the constant above as $D = \frac{E_y t^3}{12(1-\nu^2)}$ and christen it *flexural rigidity*. This is the relevant quantity (the analog in beams is $E_y I_y$) that controls the stiffness of our plate.
- We carry out the integration by parts just like before, but Ω is 2D, so we do this using Gauss divergence.

5.3. Out-of-Plane Deformations

Plate Buckling

Gauss Divergence in 2D

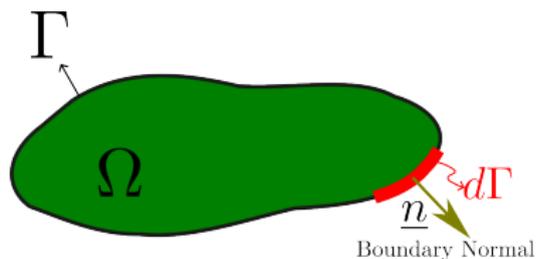

- The fundamental integral relationships to remember here are:

$$\int_{\Omega} f_{,x} d\Omega = \int_{\Gamma} f n_x d\Gamma, \quad \int_{\Omega} f_{,y} d\Omega = \int_{\Gamma} f n_y d\Gamma.$$

- n_x is the \underline{e}_x component of the normal vector \underline{n} and n_y is the corresponding \underline{e}_y component.
- For example we shall do manipulations of the following form to simplify the virtual work integral expression.

$$\int_{\Omega} f \delta w_{,x} d\Omega = \int_{\Omega} (f \delta w)_{,x} - f_{,x} \delta w d\Omega = - \int_{\Omega} f_{,x} \delta w d\Omega + \int_{\Gamma} f \delta w d\Gamma$$

5.3. Out-of-Plane Deformations

Plate Buckling

- Applying Gauss divergence once on the virtual work integral over Ω we get:

$$\begin{aligned} \delta W &= \int_{\Omega} ((N_{xx}w_{,x} + N_{xy}w_{,y})_{,x} + (N_{yy}w_{,y} + N_{xy}w_{,x})_{,y}) \delta w \, d\Omega \\ &\quad - \int_{\Gamma} \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} N_{xx}w_{,x} + N_{xy}w_{,y} \\ N_{yy}w_{,y} + N_{xy}w_{,x} \end{bmatrix} \delta w \, d\Gamma \\ &\quad - \int_{\Omega} (D(w_{,xx} + \nu w_{,yy}))_{,x} \delta w_{,x} + (D(\nu w_{,xx} + w_{,yy}))_{,y} \delta w_{,y} + (2D(1 - \nu)w_{,xy})_{,x} \delta w_{,y} \, d\Omega \\ &\quad - \int_{\Gamma} D(w_{,xx} + \nu w_{,yy}) n_x \delta w_{,x} + D(\nu w_{,xx} + w_{,yy}) n_y \delta w_{,y} + D(1 - \nu)w_{,xy} (n_x \delta w_{,y} + n_y \delta w_{,x}) \, d\Gamma. \end{aligned}$$

- Applying the Gauss divergence formula once again (on the flexural D -terms specifically) leads to:

$$\begin{aligned} \delta W &= - \int_{\Omega} \left((D(w_{,xx} + \nu w_{,yy}))_{,xx} + (D(\nu w_{,xx} + w_{,yy}))_{,yy} + (2D(1 - \nu)w_{,xy})_{,xy} \right. \\ &\quad \left. - (N_{xx}w_{,x} + N_{xy}w_{,y})_{,x} - (N_{yy}w_{,y} + N_{xy}w_{,x})_{,y} \right) \delta w \, d\Omega \\ &\quad - \int_{\Gamma} D \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} w_{,xx} + \nu w_{,yy} \\ (1 - \nu)w_{,xy} \end{bmatrix} \delta w_{,x} \, d\Gamma + \int_{\Gamma} D \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} (1 - \nu)w_{,xy} \\ \nu w_{,xx} + w_{,yy} \end{bmatrix} \delta w_{,y} \, d\Gamma \\ &\quad + \int_{\Gamma} \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} (D(w_{,xx} + \nu w_{,yy}))_{,x} + (D(1 - \nu)w_{,xy})_{,y} - (N_{xx}w_{,x} + N_{xy}w_{,y}) \\ (D(\nu w_{,xx} + w_{,yy}))_{,y} + (D(1 - \nu)w_{,xy})_{,x} - (N_{yy}w_{,y} + N_{xy}w_{,x}) \end{bmatrix} \delta w \, d\Gamma \end{aligned}$$

5.3. Out-of-Plane Deformations

Plate Buckling

- Applying Gauss divergence once on the virtual work integral over Ω we get:

$$\delta W = \int_{\Omega} ((N_{xx}w_{,x} + N_{xy}w_{,y})_{,x} + (N_{yy}w_{,y} + N_{xy}w_{,x})_{,y}) \delta w \, d\Omega$$

$$- \int_{\Gamma} [n_x \quad n_y] \begin{bmatrix} (N_{xx}w_{,x} + N_{xy}w_{,y})_{,x} \\ (N_{yy}w_{,y} + N_{xy}w_{,x})_{,y} \end{bmatrix} \delta w \, d\Gamma$$

$$+ \int_{\Omega} (D(w_{,xx} + \nu w_{,yy}))_{,xx} + (D(\nu w_{,xx} + w_{,yy}))_{,yy} + (2D(1 - \nu)w_{,xy})_{,xy}$$

$$- \int_{\Gamma} D [n_x \quad n_y] \begin{bmatrix} w_{,xx} + \nu w_{,yy} \\ (1 - \nu)w_{,xy} \end{bmatrix} \delta w_{,x} \, d\Gamma + \int_{\Gamma} D [n_x \quad n_y] \begin{bmatrix} (1 - \nu)w_{,xy} \\ \nu w_{,xx} + w_{,yy} \end{bmatrix} \delta w_{,y} \, d\Gamma$$

This gives us all we need to write down the governing partial differential equations along with the proper boundary conditions. We shall next write these down assuming D , N_{xx} , N_{yy} , and N_{xy} are all constants throughout.

- Applying the Gauss divergence formula once again (on the flexural D -terms specifically) leads to:

$$\delta W = - \int_{\Omega} \left((D(w_{,xx} + \nu w_{,yy}))_{,xx} + (D(\nu w_{,xx} + w_{,yy}))_{,yy} + (2D(1 - \nu)w_{,xy})_{,xy} \right. \\ \left. - (N_{xx}w_{,x} + N_{xy}w_{,y})_{,x} - (N_{yy}w_{,y} + N_{xy}w_{,x})_{,y} \right) \delta w \, d\Omega$$

$$- \int_{\Gamma} D [n_x \quad n_y] \begin{bmatrix} w_{,xx} + \nu w_{,yy} \\ (1 - \nu)w_{,xy} \end{bmatrix} \delta w_{,x} \, d\Gamma + \int_{\Gamma} D [n_x \quad n_y] \begin{bmatrix} (1 - \nu)w_{,xy} \\ \nu w_{,xx} + w_{,yy} \end{bmatrix} \delta w_{,y} \, d\Gamma$$

$$+ \int_{\Gamma} [n_x \quad n_y] \begin{bmatrix} (D(w_{,xx} + \nu w_{,yy}))_{,x} + (D(1 - \nu)w_{,xy})_{,y} - (N_{xx}w_{,x} + N_{xy}w_{,y}) \\ (D(\nu w_{,xx} + w_{,yy}))_{,y} + (D(1 - \nu)w_{,xy})_{,x} - (N_{yy}w_{,y} + N_{xy}w_{,x}) \end{bmatrix} \delta w \, d\Gamma$$

5.3. Out-of-Plane Deformations

Plate Buckling

- For the case with constant $D, N_{xx}, N_{yy}, N_{xy}$, we can simplify the virtual work to:

$$\begin{aligned} \delta W = & - \int_{\Omega} D(w_{,xxxx} + w_{,yyyy} + 2w_{,xxyy}) - (N_{xx}w_{,xx} + N_{yy}w_{,yy} + 2N_{xy}w_{,xy})d\Omega \\ & - \int_{\Gamma} D \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} w_{,xx} + \nu w_{,yy} \\ (1-\nu)w_{,xy} \end{bmatrix} \delta w_{,x} d\Gamma + \int_{\Gamma} D \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} (1-\nu)w_{,xy} \\ \nu w_{,xx} + w_{,yy} \end{bmatrix} \delta w_{,y} d\Gamma \\ & + \int_{\Gamma} \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} D(w_{,xxx} + w_{,xyy}) - (N_{xx}w_{,x} + N_{xy}w_{,y}) \\ D(w_{,xxy} + w_{,yyy}) - (N_{xy}w_{,x} + N_{yy}w_{,y}) \end{bmatrix} \delta w d\Omega \end{aligned}$$

- With this we can write the PDE:

$$D\nabla^4 w - (N_{xx}w_{,xx} + N_{yy}w_{,yy} + 2N_{xy}w_{,xy}) = 0, \quad (x, y) \in \Omega$$

$$w_{,x} \text{ specified, OR } D \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} w_{,xx} + \nu w_{,yy} \\ (1-\nu)w_{,xy} \end{bmatrix} = 0, \quad (x, y) \in \Gamma$$

$$w_{,y} \text{ specified, OR } D \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} (1-\nu)w_{,xy} \\ \nu w_{,xx} + w_{,yy} \end{bmatrix} = 0, \quad (x, y) \in \Gamma$$

$$w \text{ specified, OR } \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} D(w_{,xxx} + w_{,xyy}) - (N_{xx}w_{,x} + N_{xy}w_{,y}) \\ D(w_{,xxy} + w_{,yyy}) - (N_{xy}w_{,x} + N_{yy}w_{,y}) \end{bmatrix} = 0, \quad (x, y) \in \Gamma.$$

5.3. Out-of-Plane Deformations

Plate Buckling

- For the case with constant $D, N_{xx}, N_{yy}, N_{xy}$, we can simplify the virtual work to:

$$\begin{aligned} \delta W = & - \int_{\Omega} D(w_{,xxxx} + w_{,yyyy} + 2w_{,xxyy}) - (N_{xx}w_{,xx} + N_{yy}w_{,yy} + 2N_{xy}w_{,xy})d\Omega \\ & - \int_{\Gamma} D \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} w_{,xx} + \nu w_{,yy} \\ (1-\nu)w_{,xy} \end{bmatrix} \delta w_{,x} d\Gamma + \int_{\Gamma} D \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} (1-\nu)w_{,xy} \\ \nu w_{,xx} + w_{,yy} \end{bmatrix} \delta w_{,y} d\Gamma \\ & + \int_{\Gamma} \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} D(w_{,xxx} + w_{,xyy}) - (N_{xx}w_{,x} + N_{xy}w_{,y}) \\ D(w_{,xxy} + w_{,yyy}) - (N_{xy}w_{,x} + N_{yy}w_{,y}) \end{bmatrix} \delta w d\Omega \end{aligned}$$

- With this

Recall that $\theta_x = w_{,y}$ and $\theta_y = -w_{,x}$, so the corresponding work conjugates here are the appropriate moments that may be applied over the boundary.

$$w_{,yy}w_{,yy} + 2N_{xy}w_{,xy}) = 0, \quad (x, y) \in \Omega$$

$$w_{,x} \text{ specified, OR } D \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} w_{,xx} + \nu w_{,yy} \\ (1-\nu)w_{,xy} \end{bmatrix} = 0, \quad (x, y) \in \Gamma$$

$$w_{,y} \text{ specified, OR } D \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} (1-\nu)w_{,xy} \\ \nu w_{,xx} + w_{,yy} \end{bmatrix} = 0, \quad (x, y) \in \Gamma$$

$$w \text{ specified, OR } \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} D(w_{,xxx} + w_{,xyy}) - (N_{xx}w_{,x} + N_{xy}w_{,y}) \\ D(w_{,xxy} + w_{,yyy}) - (N_{xy}w_{,x} + N_{yy}w_{,y}) \end{bmatrix} = 0, \quad (x, y) \in \Gamma.$$

5.3. Out-of-Plane Defor

Plate Buckling

- For the case with constant

$$\delta W = - \int_{\Omega} D(w,_{xxxx}) - \int_{\Gamma} D \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} w,_{xx} \\ w,_{yy} \end{bmatrix} + \int_{\Gamma} \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} w,_{xy} \\ w,_{yx} \end{bmatrix}$$

- With this

Recall the twisting work contribution appropriate boundary conditions be applied

For simple straight boundaries facing the fundamental directions ($(n_x, n_y) \in \{(1, 0), (0, 1)\}$), we can write the boundary moments as follows:

Boundary

$$(n_x, n_y) = (1, 0)$$

- The moment linked to twisting rotation $\theta_x = w,_{xy}$ is

$$-M_{xy} = D(1 - \nu)w,_{xy}$$

- The moment linked to rotation about the boundary $\theta_y = -w,_{xx}$ is

$$M_x = -D(w,_{xx} + \nu w,_{yy})$$

Boundary

$$(n_x, n_y) = (0, 1)$$

- The moment linked to rotation about the boundary $\theta_x = w,_{xy}$ is

$$M_y = D(\nu w,_{xx} + w,_{yy})$$

- The moment linked to twisting rotation $\theta_y = -w,_{xx}$ is

$$M_{xy} = -D(1 - \nu)w,_{xy}$$


$$w,_{xx} \text{ specified, OR } D \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} w,_{xx} + \nu w,_{yy} \\ (1 - \nu)w,_{xy} \end{bmatrix} = 0, \quad (x, y) \in \Gamma$$

$$w,_{yy} \text{ specified, OR } D \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} (1 - \nu)w,_{xy} \\ \nu w,_{xx} + w,_{yy} \end{bmatrix} = 0, \quad (x, y) \in \Gamma$$

$$w \text{ specified, OR } \begin{bmatrix} n_x & n_y \end{bmatrix} \begin{bmatrix} D(w,_{xxx} + w,_{xyy}) - (N_{xx}w,_{xx} + N_{xy}w,_{xy}) \\ D(w,_{xxy} + w,_{yyx}) - (N_{xy}w,_{xx} + N_{yy}w,_{yy}) \end{bmatrix} = 0, \quad (x, y) \in \Gamma.$$


5.4. Reaction-Kinematics Relationships

Plate Buckling

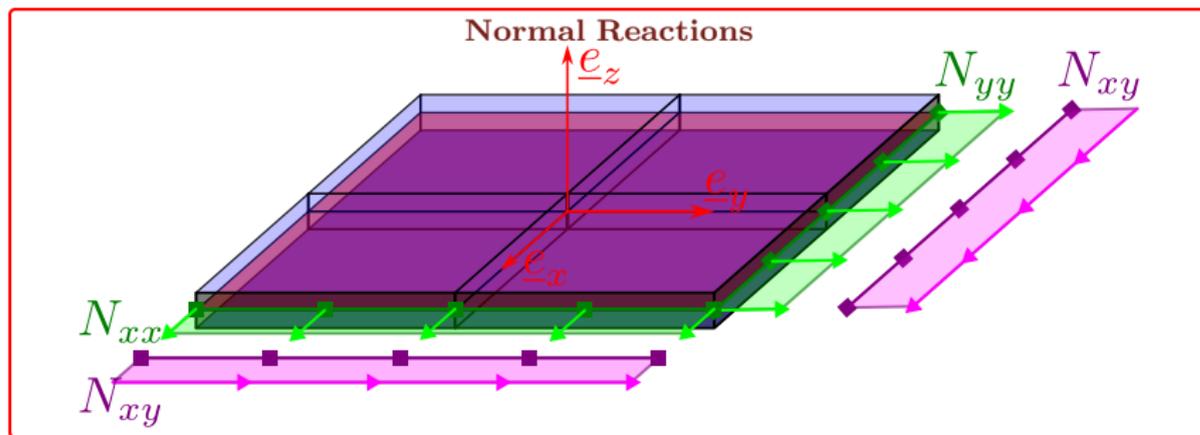


5.4. Reaction-Kinematics Relationships

Plate Buckling

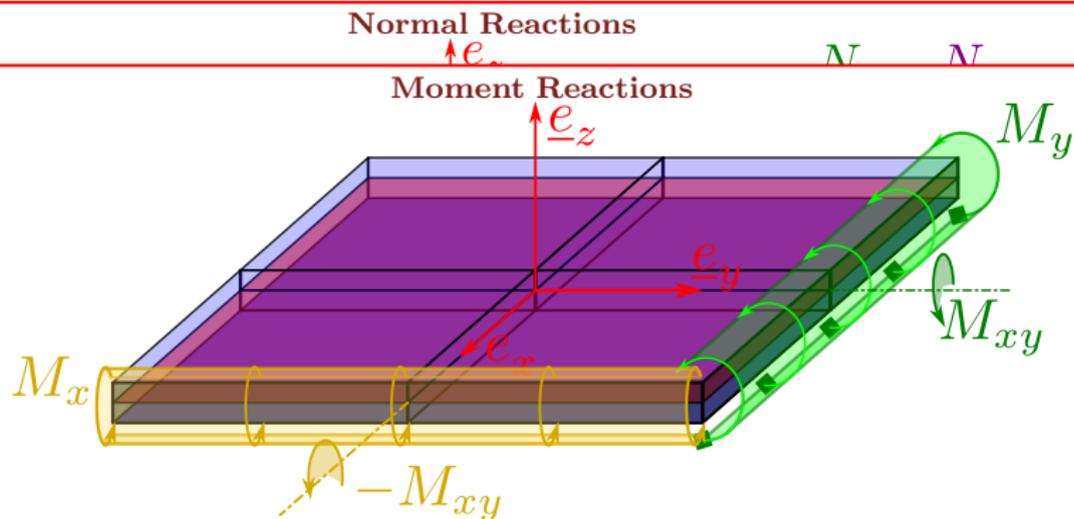

5.4. Reaction-Kinematics Relationships

Plate Buckling

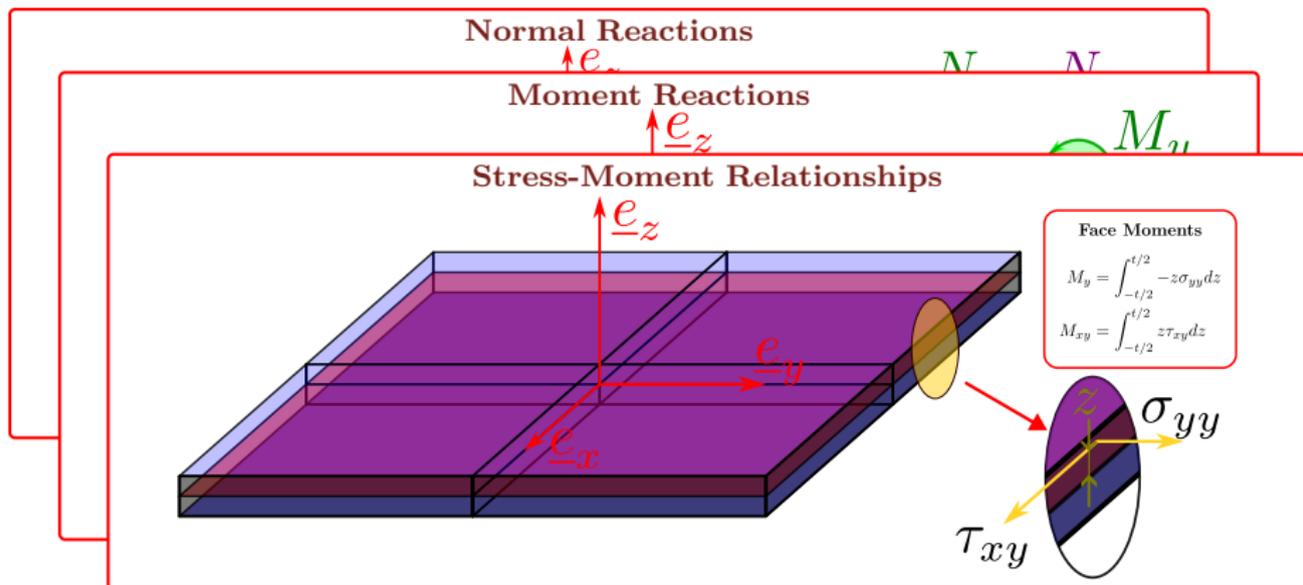

5.4. Reaction-Kinematics Relationships

Plate Buckling

Normal Reactions

 $\uparrow e_x$
 N
 N

Moment Reactions

 $\uparrow e_z$
 M_y

Stress-Moment Relationships

Equilibrium Equations (Shear Force-Moment Relationships)

$$\left. \begin{aligned} \sigma_{xx,x} + \tau_{xy,y} + \tau_{xz,z} &= 0 \\ \tau_{xy,x} + \sigma_{yy,y} + \tau_{yz,z} &= 0 \\ \tau_{xz,x} + \tau_{yz,z} + \sigma_{zz,z} &= 0 \end{aligned} \right\} \implies \begin{cases} Q_x &= M_{x,x} + M_{xy,y} \\ Q_y &= -M_{y,y} + M_{xy,x} \\ 0 &= Q_{x,x} + Q_{y,y} \end{cases}$$

Note:

- Although the shear strains γ_{xz} & γ_{yz} are assumed zero by the Kirchhoff kinematic assumptions, and thereby, the stresses τ_{xz} & τ_{yz} are also zero, **the shear forces can not be zero for equilibrium!!**
- They are defined as $Q_x = \int_{-\frac{t}{2}}^{\frac{t}{2}} \tau_{xz} dz$, $Q_y = \int_{-\frac{t}{2}}^{\frac{t}{2}} \tau_{yz} dz$.

5.5. Uniform Plates Under Uniaxial Compression

Plate Buckling

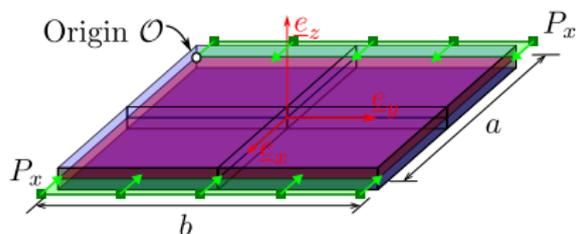


Plate under uniaxial compression

$$\text{Here } N_{xx} = -P \text{ and } N_{yy} = N_{xy} = 0.$$

Governing Equations

$$D\nabla^4 w + Pw_{,xx} = 0$$

$$\Rightarrow P_{cr,nm} = \frac{\pi^2 D}{b^2} \left(\frac{m}{a/b} + n^2 \frac{a/b}{m} \right)^2$$

(n=1 always for minimum critical load)

$$\Rightarrow P_{cr,m} = \frac{\pi^2 D}{b^2} \left(\frac{m}{a/b} + \frac{a/b}{m} \right)^2$$

$$P_{cr} = \frac{\pi^2 D}{b^2} \underbrace{\min_{m \in \mathbb{Z}^+} \left(\frac{m}{a/b} + \frac{a/b}{m} \right)^2}_{k_{cr}(a/b)}$$

Ansatz (Simply Supported Case)

$$w(x, y) = \sum_{m,n} W_{mn} \sin\left(m \frac{\pi x}{a}\right) \sin\left(n \frac{\pi y}{b}\right)$$

Boundary Conditions:


$$w = 0, M_x, M_y = 0 \quad \text{on } \Gamma$$

5.5. Uniform Plates Under Uniaxial Compression

Plate Buckling

Buckling Constant

$$k_{cr}(r) = \min_{m \in \mathbb{Z}^+} \left(\frac{m}{r} + \frac{r}{m} \right)^2$$

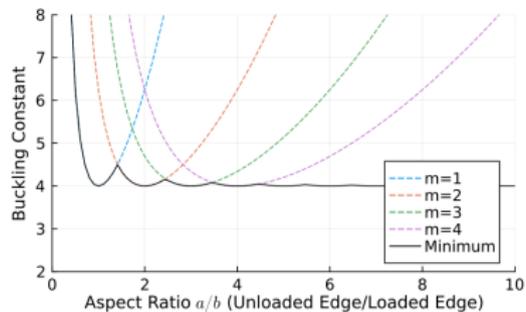


5.5. Uniform Plates Under Uniaxial Compression

Plate Buckling

Buckling Constant


$$k_{cr}(r) = \min_{m \in \mathbb{Z}^+} \left(\frac{m}{r} + \frac{r}{m} \right)^2$$

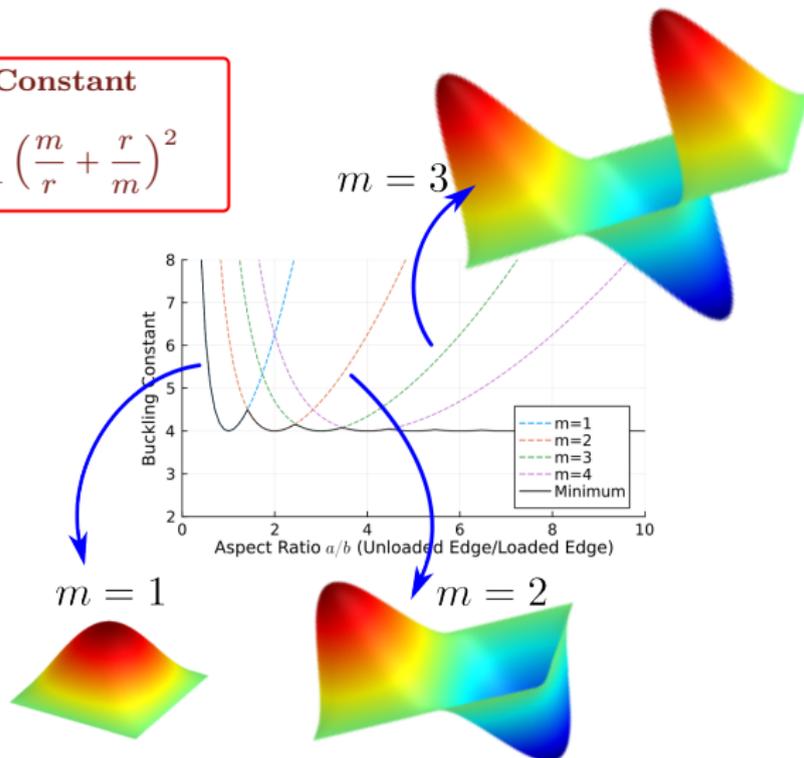

5.5. Other Boundary Conditions

Uniform Plates Under Uniaxial Compression

- It is possible to conduct the same analysis for other (combinations) of boundary conditions.
- The analysis is slightly more tedious (due to the Ansatz not being as simple any more), **but possible along the same lines.**
- The critical plot comes out as shown in your textbook.

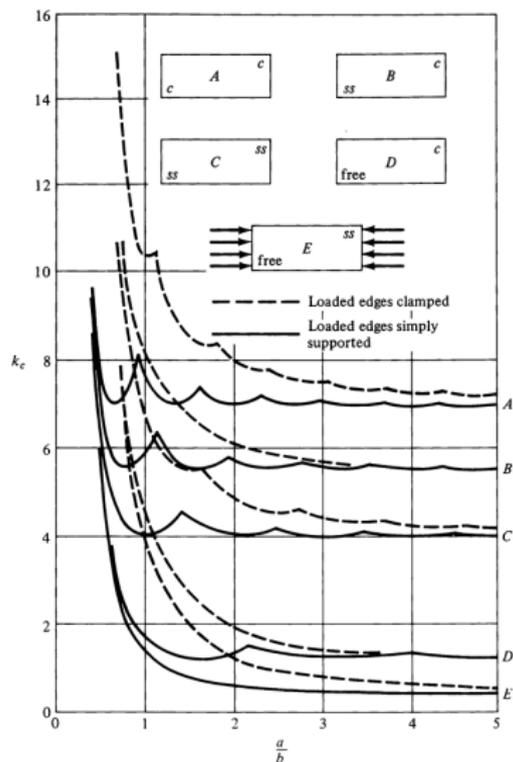


(Figure 3.9 from Brush and Almroth 1975)

5.5. Other Boundary Conditions


Uniform Plates Under Uniaxial Compression

- It is possible to conduct the same analysis for other (combinations) of boundary conditions.
- The analysis is slightly more tedious (due to the Ansatz not being as simple any more), **but possible along the same lines.**
- The critical plot comes out as shown in your textbook.

The same works for shear buckling too!

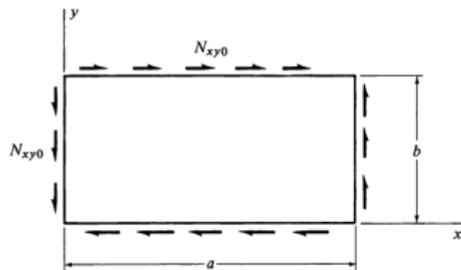

(Fig. 3.10 from Brush and Almroth 1975)

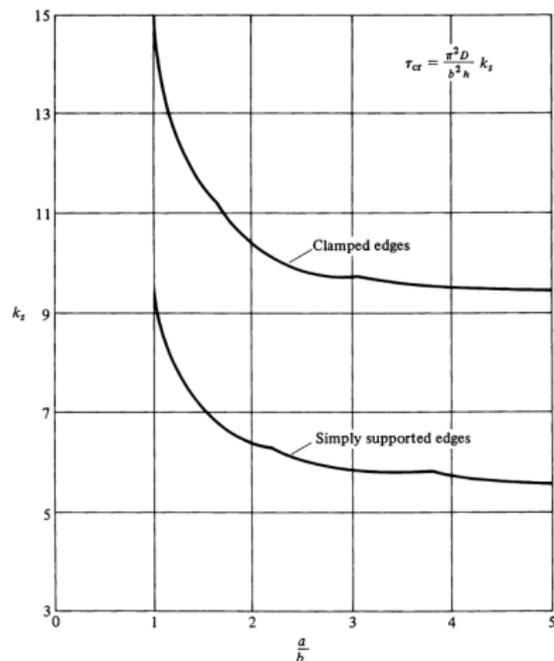


(Figure 3.11 from Brush and Almroth 1975)

5.5. Other Boundary Conditions

Uniform Plates Under Uniaxial Compression

- It is possible to conduct the same analysis


The shear buckling modeshapes, visualized

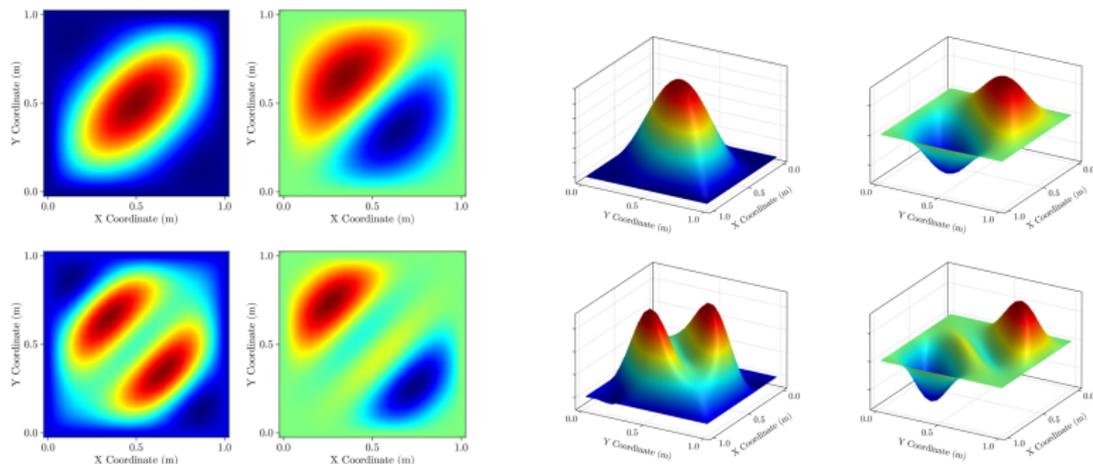


(Fig. 3.10 from Brush and Almroth 1975)

6. Food For Thought

- We're not yet ready to handle this (wait one more semester for AS3020), but some types of beam undergo **twisting instability!**
- In the right we have simply supported beams under axial compression - the beams twist before they bend under the instability.

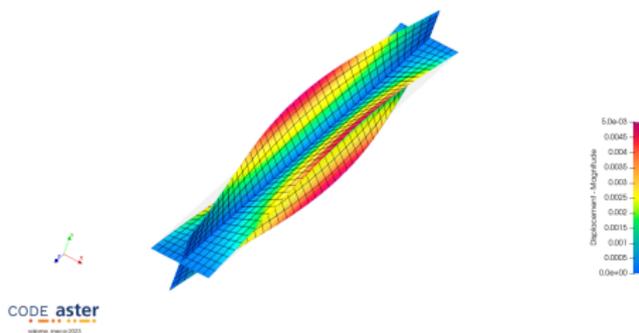

Simply Supported Beam Under Axial Compression

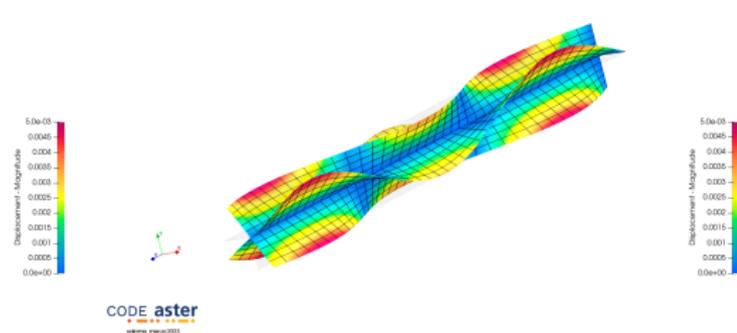

Cantilevered Beam under Axial Compression (2nd mode)

Heads Up: You are designed to see this in your structures lab experiment!

References I

- [1] Don Orr Brush and Bo O. Almroth. **Buckling of Bars, Plates, and Shells**, McGraw-Hill, 1975. ISBN: 978-0-07-008593-0 (cit. on pp. **2**, **58**, **89-91**).
- [2] T. H. G. Megson. **Aircraft Structures for Engineering Students**, Elsevier, 2013. ISBN: 978-0-08-096905-3 (cit. on p. **2**).
- [3] Richard Wiebe et al. “**On Snap-Through Buckling**”. In: *52nd AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics and Materials Conference*. Denver, Colorado: American Institute of Aeronautics and Astronautics, Apr. 2011. ISBN: 978-1-60086-951-8. DOI: **10.2514/6.2011-2083**. (Visited on 02/18/2025) (cit. on p. **61**).

8. Tutorials

- 7 Tutorials
 - Column Buckling

8.1. Column Buckling

Tutorials

1. Straight Column

A straight column 500 mm long has a rectangular cross section that is 25 mm wide and 10 mm thick. If the column ends are simply supported and $E_y = 200$ GPa. **Determine the buckling load.**

2. Crooked Column

Consider the same column as above but with crookedness quantified by $C_1 = 1$ mm, 0.1 mm, 0.01 mm (and $C_m = 0$ for $m > 1$).

- Plot the axial load versus maximum transverse deflection curves for each of the cases above.
- Determine the magnitude of the maximum compressive stress on the cross section for each of the three cases for an applied load of 2000 N.

8.1. Column Buckling: 1. Straight Column

Tutorials

- The section properties are computed as

$$A = 250 \text{ mm}^2, \quad I_y = 2083.33 \text{ mm}^4, \quad I_z = 13\,020.83 \text{ mm}^4.$$

Clearly buckling in the \underline{e}_y direction will be sooner than buckling in the \underline{e}_z direction, so we will only consider this.

- The buckling critical load is written as:


$$P_{cr} = \frac{\pi^2 E_y I_y}{\ell^2} = \pi^2 \frac{2 \times 10^5 \cdot 2083.33}{500^2} = 16\,449.31 \text{ N}.$$

Please be careful of units

8.1. Column Buckling: 2. Crooked Column

Tutorials

- Our formula for the mid-point deflection of a crooked column is $\Delta = \frac{C_1}{\frac{P_{cr}}{P} - 1}$ and is plotted in the figure below.
- The formula for axial stress is $\sigma_x = \frac{N}{A} - E_y y v'' = -\frac{P}{A} - E_y v'' y$.

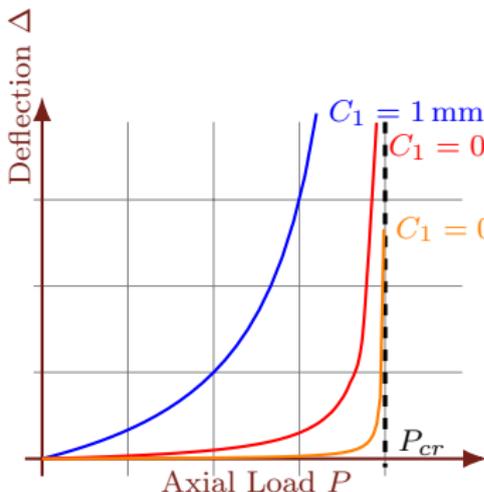

Deflection Plot

- For $P = 2000$ N, $\Delta = 0.1384C_1$
- Since $v = \Delta \sin\left(\frac{\pi x}{\ell}\right)$, $v'' = -\Delta \frac{\pi^2}{\ell^2} \sin\left(\frac{\pi x}{\ell}\right)$ whose maximum value is $\frac{\pi^2 \Delta}{\ell^2} = 5.4644C_1$.
- The maximum value of y is $y_{\max} = 5$ mm. So the stress equation becomes

$$\begin{aligned}\sigma_{\max} &= \frac{2000}{250 \times 10^{-6}} + 5.4644C_1 \times 5 \text{ mm} \times 200 \text{ GPa} \\ &= 8 + 5464.4C_1 \quad (\text{in MPa}).\end{aligned}$$

Peak axial stress for different C_1

C_1 (mm)	σ_{\max} (MPa)
1	13.46
0.1	8.55
0.01	8.05

9. Post-Buckling Behavior of Beams (Out of Syllabus)

- Let us use the variational approach to study the post-buckling behavior of a beam.
- We've developed some intuition that buckling blows up the displacement levels. Let us revise our kinematic description to capture this.
- The (simplified) approach we will follow is as follows:
 - ① **Write out nonlinear kinematics**, identify normal force $N = \int_{\mathcal{A}} \sigma_x dA$ and moment $M = \int_{\mathcal{A}} -y\sigma_x dA$.
 - ② **Assume transverse deformation field** $v = V \sin\left(\frac{\pi x}{\ell}\right)$
 - ③ **Assume axial tip deflection** u_T and derive axial deformation field.
 - ④ **Express work done in terms of scalars** V and u_T . \rightarrow Extremize.
 - ⑤ **Plot force deflection curves, analyze stability.**

8 Post-Buckling Behavior of Beams (Out of Syllabus)

- Geometrically Nonlinear Kinematics
- Equilibrium

9.1. Geometrically Nonlinear Kinematics

Post-Buckling Behavior of Beams (Out of Syllabus)

Geometrically Nonlinear Kinematics

- The deformation field is written as $u_x = u - yv'$, $u_y = v$. Consider the deformation of a line from (x, y) to $(x + \Delta x, y)$:

$$\begin{aligned}(x, y) &\rightarrow (x + u - yv', y + v), \\(x + \Delta x, y) &\rightarrow (x + \Delta x + u - yv' + (u' - yv'')\Delta x, y + v + v'\Delta x), \\ \Delta S &= \Delta x, \quad \Delta s^2 = \Delta x^2((1 + u' - yv'')^2 + v'^2).\end{aligned}$$

- We write the axial strain as

$$\varepsilon_x = \frac{1}{2} \frac{\Delta s^2 - \Delta S^2}{\Delta S^2} = (u' - yv'') + \frac{1}{2} \left((u' - yv'')^2 + v'^2 \right)$$

$$\varepsilon_x \approx (u' - yv'') + \frac{v'^2}{2}.$$

- The final assumption is sometimes referred to as Von Karman strain assumptions.

9.2. Equilibrium

Post-Buckling Behavior of Beams (Out of Syllabus)

- Nearly nothing changes in the equilibrium equations. We first write out the area-normal stresses and moments:

$$N = \int_{\mathcal{A}} E_y \varepsilon_x dA = E_y A \left(u' + \frac{v'^2}{2} \right), \quad M = \int_{\mathcal{A}} -y E_y \varepsilon_x dA = E_y I_y v''.$$

- The axial force balance reads:

$$N' = E_y A \frac{d}{dx} \left(u' + \frac{v'^2}{2} \right) = 0, \quad u(x)|_{x=0} = 0, \quad u|_{x=\ell} = u_T.$$

9.2. Equilibrium: Axial Problem

Post-Buckling Behavior of Beams (Out of Syllabus)

- We next **impose the transverse deformation field** $v(x) = V \sin\left(\frac{\pi x}{\ell}\right)$ on the axial problem. Solving this, we get

$$u(x) = -\frac{\pi V^2}{8\ell} \sin\left(\frac{2\pi x}{\ell}\right) + C_1 x + C_2.$$

- Boundary conditioned are imposed by setting $C_1 = \frac{u_T}{\ell}$ and $C_2 = 0$.
- The parameterized axial deformation field, therefore, is

$$u(x; V, u_T) = \frac{u_T}{\ell} x - \frac{\pi V^2}{8\ell} \sin\left(\frac{2\pi x}{\ell}\right).$$

- Note that we have not said anything about V or u_T so far.

9.2. Equilibrium: Strain Energy Density

Post-Buckling Behavior of Beams (Out of Syllabus)

- The strain energy density (per unit length) is written as,

$$\begin{aligned}\mathcal{V} &= \int_{\mathcal{A}} \frac{E_y \varepsilon_x^2}{2} dA = \frac{E}{2} \int_{\mathcal{A}} \left(u' - yv'' + \frac{v'^2}{2} \right)^2 dx \\ &= \frac{E_y A}{2} \left(u' + \frac{v'^2}{2} \right)^2 + \frac{E_y I_y}{2} v''^2 \approx \frac{E_y I_y}{2} v''^2 + \frac{E_y A}{2} \frac{v'^4}{4}.\end{aligned}$$

- Note that we have assumed $u_T \rightarrow 0$, i.e., providing negligible influence on the overall potential energy.
- Substituting the assumed deformation field $v = V \sin(\frac{\pi x}{\ell})$ and integrating over $(0, \ell)$ we have,

$$\begin{aligned}\mathcal{V}_{tot} &= \int_0^{\ell} \mathcal{V}(x) dx = \frac{\pi^4 E_y I_y}{4\ell^3} V^2 + \frac{3\pi^4 E_y A}{64\ell^3} V^4 \\ &= \frac{\pi^2 P_{cr}}{4\ell} V^2 + \frac{3\pi^2 A P_{cr}}{64I\ell} V^4.\end{aligned}$$

9.2. Equilibrium: Work Stationarity

Post-Buckling Behavior of Beams (Out of Syllabus)

- The work done by an axial compressive load P is given by

$$\begin{aligned}\Pi &= \int_0^{\ell} \int_{\mathcal{A}} \frac{P}{A} \varepsilon_x dA dx = \int_0^{\ell} \int_{\mathcal{A}} \frac{P}{A} (u' - yv'' + \frac{v'^2}{2}) dA dx \\ &= P \int_0^{\ell} u' dx + \frac{P}{2} \int_0^{\ell} v'^2 dx\end{aligned}$$

$$\boxed{\Pi = Pu_T + \frac{\pi^2 P}{4\ell} V^2.}$$

- So the total work scalar ($W = \Pi - \mathcal{V}_{tot}$) is given as (we ignore u_T here)

$$W(V) = \frac{\pi^2}{4\ell} (P - P_{cr}) V^2 - \frac{3\pi^2 A}{64I\ell} P_{cr} V^4.$$

9.2. Equilibrium: Work Stationarity

Post-Buckling Behavior of Beams (Out of Syllabus)

- Stationarizing the work we get,

$$\frac{dW}{dV} = \frac{\pi^2 P_{cr}}{2\ell} V \left(\left(\frac{P}{P_{cr}} - 1 \right) - \frac{3A}{8I} V^2 \right) \implies V = 0, \pm \sqrt{\frac{8I}{3A} \left(\frac{P}{P_{cr}} - 1 \right)}.$$

Note that the non-trivial solution is only active for $P \geq P_{cr}$.

- We can next estimate u_T easily by applying the boundary conditions.

9.2. Equilibrium: Work Stationarity

Post-Buckling Behavior of Beams (Out of Syllabus)

• Stat

Not

• We

