



AS3020: Aerospace Structures

Module 4: Bending of Beam-Like Structures


Instructor: Nidish Narayanaa Balaji

Dept. of Aerospace Engg., IIT-Madras, Chennai


September 25, 2025

Table of Contents

- 1 Unsymmetrical Bending
 - Axial Stress and its Moments
 - Axial Stress In Terms of Moments and Forces
 - Equilibrium Equations
 - Equations of Motion in Terms of Displacement
- 2 Shear Stress and Flow in Sections
 - Shear Flow Distribution
 - The Simple Rectangular Section
 - The “C” Section
 - The “I” Section
 - Closed Sections
 - The Rectangular “Box” Section
- 3 Stringer-Web Idealization
 - Idealizing a Thin Rectangular Section
 - Idealized Analysis of a C Section
- 4 Saint-Venant’s Principle in Practice: Shear Lag



Chapters 4-5 in Sun (2006)



Chapters 16-20 in Megson (2013)


1. Unsymmetrical Bending

Assumptions

- ❶ Plane sections remain planar.
- ❷ Sections remain perpendicular to neutral axis: $\gamma_{12} = \gamma_{13} = 0$.
- ❸ Plane Stress: $\sigma_{22} = \sigma_{33} = 0$.



Deformed State



1. Rigid Section Displacement Field

$$\begin{bmatrix} u_1 \\ u_2 \\ u_3 \end{bmatrix} = \begin{bmatrix} 0 \\ v(X_1) \\ w(X_1) \end{bmatrix} + \underbrace{\begin{bmatrix} X_3\theta_2 - X_2\theta_3 \\ 0 \\ 0 \end{bmatrix}}_{\underline{\theta} \times \underline{X}}$$

2. Zero Shear Strain Simplification

$$\gamma_{12} = \gamma_{13} = 0 \implies \theta_2 = -w', \quad \theta_3 = v'$$

3. Plane Stress Constitution

$$\sigma_{11} = E_Y \underline{E}_{11}$$

$$\implies \mathcal{E}_{11} = u_{1,1} = [X_3 \quad -X_2] \begin{bmatrix} \theta_2' \\ \theta_3' \end{bmatrix}.$$

We shall develop the theory without the zero strain simplification first.

1.1. Axial Stress and its Moments

Unsymmetrical Bending

- The axial stress distribution is $\sigma_{11} = E_Y [X_3 \quad -X_2] \begin{bmatrix} \theta'_2 \\ \theta'_3 \end{bmatrix}$. The traction vector in the section is $\underline{t} = \sigma_{11}\underline{e}_1 + \sigma_{12}\underline{e}_2 + \sigma_{13}\underline{e}_3$.
- Considering just the axial component ($\sigma_{11}\underline{e}_1$), we write the overall axial force as the area integral (**zeroth moment**):

$$N_1 = \int_{\mathcal{A}} \sigma_{11} = E_Y \left[\int_{\mathcal{A}} X_3 dA \quad - \int_{\mathcal{A}} X_2 dA \right] \begin{bmatrix} \theta'_2 \\ \theta'_3 \end{bmatrix}.$$

- Recall that we have already chosen then origin as the section centroid for expressing the rigid rotation displacement field, s.t. $\int_{\mathcal{A}} \underline{X} dA = \underline{0}$. Therefore $N_1 = 0$ for pure bending.
- Considering the moment due to the axial component ($d\underline{m} = (X_k \underline{e}_k) \times (\sigma_{11} \underline{e}_1 dA)$) we have (**first moment**):

$$\begin{aligned} \begin{bmatrix} M_2 \\ M_3 \end{bmatrix} &= \int_{\mathcal{A}} \begin{bmatrix} X_3 \\ -X_2 \end{bmatrix} \sigma_{11} dA = \int_{\mathcal{A}} E_Y \begin{bmatrix} X_3 \\ -X_2 \end{bmatrix} [X_3 \quad -X_2] dA \begin{bmatrix} \theta'_2 \\ \theta'_3 \end{bmatrix} \\ &= \int_{\mathcal{A}} E_Y \begin{bmatrix} X_3^2 & -X_2 X_3 \\ -X_2 X_3 & X_2^2 \end{bmatrix} dA \begin{bmatrix} \theta'_2 \\ \theta'_3 \end{bmatrix}. \end{aligned}$$

For constant E_Y through section,

$$\begin{bmatrix} M_2 \\ M_3 \end{bmatrix} = E_Y \begin{bmatrix} I_{22} & -I_{23} \\ -I_{23} & I_{33} \end{bmatrix} \begin{bmatrix} \theta'_2 \\ \theta'_3 \end{bmatrix}.$$

Second Moments of Area

$$I_{22} = \int_{\mathcal{A}} X_3^2 dA$$

$$I_{33} = \int_{\mathcal{A}} X_2^2 dA$$

$$I_{23} = \int_{\mathcal{A}} X_2 X_3 dA$$

1.2. Axial Stress In Terms of Moments and Forces

Unsymmetrical Bending

- It is sometimes convenient to have the stress σ_{11} expressed in terms of its resultant moments instead of kinematic quantities like θ_2 and θ_3 . So we will invert the relationship that we have to first get:

$$\begin{bmatrix} \theta'_2 \\ \theta'_3 \end{bmatrix} = \frac{1}{E_Y} \frac{1}{I_{22}I_{33} - I_{23}^2} \begin{bmatrix} I_{33} & I_{23} \\ I_{23} & I_{22} \end{bmatrix} \begin{bmatrix} M_2 \\ M_3 \end{bmatrix}.$$

- Stress simplifies as

$$\begin{aligned} \sigma_{11} &= E_Y \begin{bmatrix} X_3 & -X_2 \end{bmatrix} \begin{bmatrix} \theta'_2 \\ \theta'_3 \end{bmatrix} \\ &= \frac{\begin{bmatrix} X_3 & -X_2 \end{bmatrix}}{I_{22}I_{33} - I_{23}^2} \begin{bmatrix} I_{33} & I_{23} \\ I_{23} & I_{22} \end{bmatrix} \begin{bmatrix} M_2 \\ M_3 \end{bmatrix}. \end{aligned}$$

- Observe that we have gotten to the above without requiring shear strains to be zero.

1.3. Equilibrium Equations

Unsymmetrical Bending

- We shall invoke and simplify the equilibrium equations in an integral sense in the presence of transverse forces only (**stress assumptions: $\sigma_{22} = \sigma_{33} = \sigma_{23} = 0$**).

$$\sigma_{1j,j} = 0 \implies \int_{\mathcal{A}} \sigma_{1j,j} dA = 0$$

$$\sigma_{12,1} + f_2 = 0 \implies \int_{\mathcal{A}} \sigma_{12,1} dA + \int_{\mathcal{A}} f_2 dA = 0$$

$$\sigma_{13,1} + f_3 = 0 \implies \int_{\mathcal{A}} \sigma_{13,1} dA + \int_{\mathcal{A}} f_3 dA = 0$$

- $\int_{\mathcal{A}} \sigma_{1j,j} dA$ is simplified as

$$\int_{\mathcal{A}} \sigma_{1j,j} dA = \int_{\mathcal{A}} \sigma_{11,1} dA + \underbrace{\int_{\mathcal{A}} \sigma_{1j} n_j dA}_{\text{Gauss divergence in 2D: } \int_{\mathcal{A}} \sigma_{1j} n_j dA} = N_{1,1}$$

where $\underline{n} = n_j \underline{e}_j$ is the **outward pointing normal** on the boundary of the section ($n_1 = 0$).

- $\sigma_{1j} n_j$ is the $\underline{e}_1$ component of the traction vector on the free surface. By definition this has to be zero, so we have $N_{1,1} = 0$.
- Defining the shearing forces as $V_2 = \int_{\mathcal{A}} \sigma_{12} dA$ and $V_3 = \int_{\mathcal{A}} \sigma_{13} dA$, the second two equations can be read as:

$$\boxed{V_{2,1} + F_2 = 0}, \quad \boxed{V_{3,1} + F_3 = 0}.$$

1.3. Equilibrium Equations

Unsymmetrical Bending

- In order to relate the different stresses, we invoke $M_2 = X_3\sigma_{11}$ and $M_3 = -X_2\sigma_{11}$ now.
- We first pre-multiply $\sigma_{1j,j}$ by X_3 **and then integrate** over the section:

$$\int_{\mathcal{A}} X_3\sigma_{11,1}dA + \int_{\mathcal{A}} X_3\sigma_{12,2} + X_3\sigma_{13,3}dA = M_{2,1} + \int_{\mathcal{A}} (X_3\sigma_{12})_{,2} + (X_3\sigma_{13})_{,3} - \sigma_{13}dA$$

$$\int_{\mathcal{A}} (X_3\sigma_{12})_{,2} + (X_3\sigma_{13})_{,3}dA = \int_{\partial\mathcal{A}} \cancel{X_3\sigma_{1k}n_k}d\ell \implies M_{2,1} - \int_{\mathcal{A}} \sigma_{13}dA = \boxed{M_{2,1} - V_3 = 0}.$$

- Next we pre-multiply $\sigma_{1j,j}$ by X_2 and repeat the same:

$$\int_{\mathcal{A}} X_2\sigma_{11,1}dA + \int_{\mathcal{A}} X_2\sigma_{12,2} + X_3\sigma_{13,3}dA = -M_{3,1} + \int_{\mathcal{A}} (X_2\sigma_{12})_{,2} - \sigma_{12} + (X_2\sigma_{13})_{,3}dA$$

$$\int_{\mathcal{A}} (X_2\sigma_{12})_{,2} + (X_2\sigma_{13})_{,3}dA = \int_{\partial\mathcal{A}} \cancel{X_2\sigma_{1k}n_k}d\ell \implies M_{3,1} + \int_{\mathcal{A}} \sigma_{12}dA = \boxed{M_{3,1} + V_2 = 0}.$$

- We are finally left with 4 equilibrium equations applicable for beam theory:

$$\boxed{V_{2,1} + F_2 = 0}, \quad \boxed{V_{3,1} + F_3 = 0}, \quad \boxed{M_{2,1} - V_3 = 0}, \quad \boxed{M_{3,1} + V_2 = 0}.$$

These are independent of any kinematic assumptions that we may make.

1.3. Equilibrium Equations

Unsymmetrical Bending

- In order to relate the different stresses, we invoke $M_2 = X_3\sigma_{11}$ and $M_3 = -X_2\sigma_{11}$ now.
- We first pre-multiply $\sigma_{1j,j}$ by X_3 **and then integrate** over the section:

$$\int_{\mathcal{A}} X_3\sigma_{11,1}dA + \int_{\mathcal{A}} X_3\sigma_{12,2} + X_3\sigma_{13,3}dA = M_{2,1} + \int_{\mathcal{A}} (X_3\sigma_{12})_{,2} + (X_3\sigma_{13})_{,3} - \sigma_{13}dA$$

Transverse Force-Bending Moment Relationship

$$\int_{\mathcal{A}} (X_2\sigma_{12})_{,2} + (X_2\sigma_{13})_{,3}dA = -V_3 = 0.$$

$$V_{2,1} + F_2 = 0, \quad V_{3,1} + F_3 = 0, \quad M_{2,1} - V_3 = 0, \quad M_{3,1} + V_2 = 0$$

$$\Rightarrow \begin{bmatrix} M_{3,1} \\ -M_{2,1} \end{bmatrix} = \begin{bmatrix} F_2 \\ F_3 \end{bmatrix}.$$

$$\int_{\mathcal{A}} X_2\sigma_{11,1}dA + \int_{\mathcal{A}} X_2\sigma_{12,2} + X_3\sigma_{13,3}dA = -M_{3,1} + \int_{\mathcal{A}} (X_2\sigma_{12})_{,2} - \sigma_{12} + (X_2\sigma_{13})_{,3}dA$$

$$\int_{\mathcal{A}} (X_2\sigma_{12})_{,2} + (X_2\sigma_{13})_{,3}dA = \int_{\partial\mathcal{A}} \cancel{X_2\sigma_{1k}n_k}d\ell \Rightarrow M_{3,1} + \int_{\mathcal{A}} \sigma_{12}dA = \boxed{M_{3,1} + V_2 = 0}$$

- We are finally left with 4 equilibrium equations applicable for beam theory:

$$\boxed{V_{2,1} + F_2 = 0}, \quad \boxed{V_{3,1} + F_3 = 0}, \quad \boxed{M_{2,1} - V_3 = 0}, \quad \boxed{M_{3,1} + V_2 = 0}.$$

These are independent of any kinematic assumptions that we may make.

1.4. Equations of Motion in Terms of Displacement

Unsymmetrical Bending

- The moments are related to the kinematics through

$$\begin{bmatrix} M_2 \\ M_3 \end{bmatrix} = E_Y \begin{bmatrix} I_{22} & -I_{23} \\ -I_{23} & I_{33} \end{bmatrix} \begin{bmatrix} \theta_2' \\ \theta_3' \end{bmatrix}.$$

- For the zero shear strain case ($\theta_2 = -w'$, $\theta_3 = v'$) the equilibrium equations simplify in the following manner:

$$\begin{aligned} \begin{bmatrix} M_{3,11} \\ -M_{2,11} \end{bmatrix} &= \begin{bmatrix} 0 & 1 \\ -1 & 0 \end{bmatrix} \begin{bmatrix} M_{2,11} \\ M_{3,11} \end{bmatrix} = \begin{bmatrix} F_2 \\ F_3 \end{bmatrix}, \\ E_Y \begin{bmatrix} 0 & 1 \\ -1 & 0 \end{bmatrix} \begin{bmatrix} I_{22} & -I_{23} \\ -I_{23} & I_{33} \end{bmatrix} \begin{bmatrix} 0 & -1 \\ 1 & 0 \end{bmatrix} \begin{bmatrix} v'''' \\ w'''' \end{bmatrix} &= \begin{bmatrix} F_2 \\ F_3 \end{bmatrix}, \\ \implies E_Y \begin{bmatrix} I_{33} & I_{23} \\ I_{23} & I_{22} \end{bmatrix} \begin{bmatrix} v'''' \\ w'''' \end{bmatrix} &= \begin{bmatrix} F_2 \\ F_3 \end{bmatrix}, \end{aligned}$$


or in more compact notation,

$$\boxed{E_Y \underset{\sim}{I} \underset{\sim}{V}'''' = \underset{\sim}{F}}, \quad \underset{\sim}{I} = \begin{bmatrix} I_{33} & I_{23} \\ I_{23} & I_{22} \end{bmatrix}, \quad \underset{\sim}{V} = \begin{bmatrix} v \\ w \end{bmatrix}.$$

(Recall that the planar symmetric bending equation is $EIv'''' = F$)

2. Shear Stress and Flow in Sections

Thin Section: Plane Stress Assumption



- Now we shall pursue the equilibrium equations for thin-walled sections.
- We define the above section-local coordinate system and transform the elasticity equations to $\sigma_{11,1} + \sigma_{1s,s} + \sigma_{1n,n} = 0$. We integrate this along the thickness:

$$\int_{X_n - \frac{t}{2}}^{X_n + \frac{t}{2}} \sigma_{11,1} dX_n + \int \sigma_{1s,s} dX_n + \int \sigma_{1n,n} dX_n = 0$$

- σ_{1n} has to be zero on the surfaces with normal $\underline{e}_n$ since these are “free” surfaces; so the last integral goes to zero. The integral above simplifies (for constant thickness along s) to:

$$t\sigma_{11,1} + \int \sigma_{1s,s} dX_n = 0 \implies \boxed{t\sigma_{11,1} + q_{,s} = 0},$$

where we define **shear flow** q , a new quantity that is basically the integral of the

transverse shear stress along the thickness:

$$\boxed{q(s) = \int \sigma_{1s} dX_n}.$$

2.1. Shear Flow Distribution

Shear Stress and Flow in Sections

- The stress distribution is written as:

$$\sigma_{11} = \frac{\begin{bmatrix} X_3 & -X_2 \end{bmatrix}}{I_{22}I_{33} - I_{23}^2} \begin{bmatrix} I_{33} & I_{23} \\ I_{23} & I_{22} \end{bmatrix} \begin{bmatrix} M_2 \\ M_3 \end{bmatrix}.$$

- Differentiating this we get:

$$\begin{aligned} \sigma_{11,1} &= \frac{\begin{bmatrix} X_3 & -X_2 \end{bmatrix}}{I_{22}I_{33} - I_{23}^2} \begin{bmatrix} I_{33} & I_{23} \\ I_{23} & I_{22} \end{bmatrix} \begin{bmatrix} \cancel{M_{2,1}}^{V_3} \\ \cancel{M_{3,1}}^{-V_2} \end{bmatrix} \\ \Rightarrow \sigma_{11,1} &= \frac{\begin{bmatrix} X_2 & X_3 \end{bmatrix}}{I_{22}I_{33} - I_{23}^2} \begin{bmatrix} I_{22} & -I_{23} \\ -I_{23} & I_{33} \end{bmatrix} \begin{bmatrix} V_2 \\ V_3 \end{bmatrix}. \end{aligned}$$

- Substituting this in $t\sigma_{11,1} + q_{,s} = 0$ we have,

You should be able to remember this formula!

$$\frac{dq}{ds} = -\frac{\begin{bmatrix} tX_2 & tX_3 \end{bmatrix}}{I_{22}I_{33} - I_{23}^2} \begin{bmatrix} I_{22} & -I_{23} \\ -I_{23} & I_{33} \end{bmatrix} \begin{bmatrix} V_2 \\ V_3 \end{bmatrix}.$$


- Integrating this from some point we designate as $s = 0$, we have

$$q(s) - q_0 = -\frac{\begin{bmatrix} \int_0^s tX_2 ds & \int_0^s tX_3 ds \end{bmatrix}}{I_{22}I_{33} - I_{23}^2} \begin{bmatrix} I_{22} & -I_{23} \\ -I_{23} & I_{33} \end{bmatrix} \begin{bmatrix} V_2 \\ V_3 \end{bmatrix}.$$

2.1.1. Shear Flow Distribution: The Simple Rectangular Section

Shear Stress and Flow in Sections

- Consider the rectangular section with height h and thickness t :

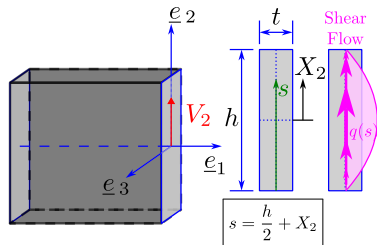

$$\begin{aligned}
 q(s) &= -\frac{V_2}{I_{33}} \int_0^s t X_2 ds = -\frac{t V_2}{I_{33}} \int_{-\frac{h}{2}}^{X_2} X_2 dX_2 \\
 &= -\frac{t V_2}{2 I_{33}} \left(X_2^2 - \frac{h^2}{4} \right)
 \end{aligned}$$

- Remember that V_2 is NOT any externally **applied force**. It is merely **the resultant of all the shear stresses in the section**.
- We are asking the question: **what SHOULD be the distribution of shear stresses (flow) so that their resultant is V_2 ?** It is incorrect to think that $q(s)$ is balancing out V_2 .

2.1.2. Shear Flow Distribution: The “C” Section

Shear Stress and Flow in Sections


- Let us consider a “C” section with uniform thickness t . **Out of convenience we shall use a non-centroidal origin, so the shear flow expression is written as**

$$q(s) - q_0 = -\frac{tV_2}{I_{33}} \int_0^s \overbrace{(X_2 - X_{C_2})}^{z_2(s)} ds - \frac{tV_3}{I_{22}} \int_0^s \overbrace{X_3}^{z_3(s)} ds.$$

- Doing shear flow calculations can get confusing because of the running integral. A nice way to keep things organized is to chart up a table and start filling it up:

	$s(X_2, X_3)$	X_2	X_3	$z_2 - z_{20}$	$z_3 - z_{30}$
A→B	$b - X_2$	$b - s$	$\frac{h}{2}$		
B→C	$b + \frac{h}{2} - X_3$	X_3	0		
C→D	$b + h + X_2$	$s - (b + h)$	$\frac{h}{2}$		

- Our task now boils down to filling this table carefully and then substituting in the equation above.

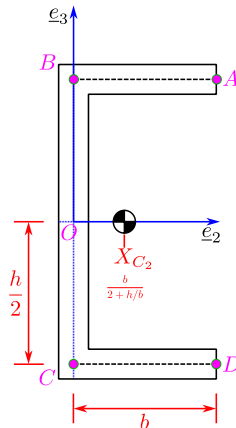


2.1.2. Shear Flow Distribution: The “C” Section

Shear Stress and Flow in Sections

- Let us first consider the case of having only V_2 and setting $V_3 = 0$, where the shear flow gets written as $q(s) = -\frac{tV_2}{I_{33}}z_2(s)$.

	$s(X_2, X_3)$	X_2	X_3	$z_2 - z_{20}$	$z_{21} - z_{20}$
A→B	$b - X_2$	$b - s$	$\frac{h}{2}$	$-\frac{(X_2 - b)}{2}\left(X_2 + \frac{h}{2 + \frac{h}{b}}\right)$	$\frac{h}{2}X_{C_2}$
B→C	$b + \frac{h}{2} - X_3$	0	X_3	$X_{C_2}(X_3 - \frac{h}{2})$	$-hX_{C_2}$
C→D	$b + h + X_2$	$s - (b + h)$	$\frac{h}{2}$	$\frac{X_2}{2}(X_2 - 2X_{C_2})$	$\frac{h}{2}X_{C_2}$




2.1.2. Shear Flow Distribution: The “C” Section

Shear Stress and Flow in Sections

- Let us first consider the case of having only V_2 and setting $V_3 = 0$, where the shear flow gets written as $q(s) = -\frac{tV_2}{I_{33}}z_2(s)$.

	$s(X_2, X_3)$	X_2	X_3	$z_2 - z_{20}$	$z_{21} - z_{20}$
A→B	$b - X_2$	$b - s$	$\frac{h}{2}$	$-\frac{(X_2 - b)}{2}\left(X_2 + \frac{h}{2 + \frac{h}{b}}\right)$	$\frac{h}{2}X_{C_2}$
B→C	$b + \frac{h}{2} - X_3$	0	X_3	$X_{C_2}\left(X_3 - \frac{h}{2}\right)$	$-hX_{C_2}$
C→D	$b + h + X_2$	$s - (b + h)$	$\frac{h}{2}$	$\frac{X_2}{2}\left(X_2 - 2X_{C_2}\right)$	$\frac{h}{2}X_{C_2}$

- Since $z_A = 0$, adding the last column cumulatively will give the value of $z(s)$. So we have $z_B = \frac{h}{2}X_{C_2}$, $z_C = -\frac{h}{2}X_{C_2}$, and $z_D = 0$. ($z_D = 0$ should also be a verification check for you since this will go to zero only if everything else is correct)
- The shear flow distribution is quadratic in the $A \rightarrow B$ and $C \rightarrow D$ segments and linear in the $B \rightarrow C$ segment.




2.1.2. Shear Flow Distribution: The “C” Section

Shear Stress and Flow in Sections

- Let us first consider the case of having only V_2 and setting $V_3 = 0$, where the shear flow gets written as $q(s) = -\frac{tV_2}{I_{33}}z_2(s)$.

	$s(X_2, X_3)$	X_2	X_3	$z_2 - z_{20}$	$z_{21} - z_{20}$
A $\rightarrow$ B	$b - X_2$	$b - s$	$\frac{h}{2}$	$-\frac{(X_2 - b)}{2}(X_2 + \frac{h}{2 + \frac{h}{b}})$	$\frac{h}{2}X_{C_2}$
B $\rightarrow$ C	$b + \frac{h}{2} - X_3$	0	X_3	$X_{C_2}(X_3 - \frac{h}{2})$	$-hX_{C_2}$
C $\rightarrow$ D	$b + h + X_2$	$s - (b + h)$	$\frac{h}{2}$	$\frac{X_2}{2}(X_2 - 2X_{C_2})$	$\frac{h}{2}X_{C_2}$

- Since $z_A = 0$, adding the last column cumulatively will give the value of $z(s)$. So we have $z_B = \frac{h}{2}X_{C_2}$, $z_C = -\frac{h}{2}X_{C_2}$, and $z_D = 0$. ($z_D = 0$ should also be a verification check for you since this will go to zero only if everything else is correct)
- The shear flow distribution is quadratic in the $A \rightarrow B$ and $C \rightarrow D$ segments and linear in the $B \rightarrow C$ segment.




Intuition Note

On segments along the direction of the resultant, the shear flow varies quadratically in space. Perpendicular to the direction of the resultant, the shear flow varies linearly in space.

2.1.2. Shear Flow Distribution: The “C” Section

Shear Stress and Flow in Sections

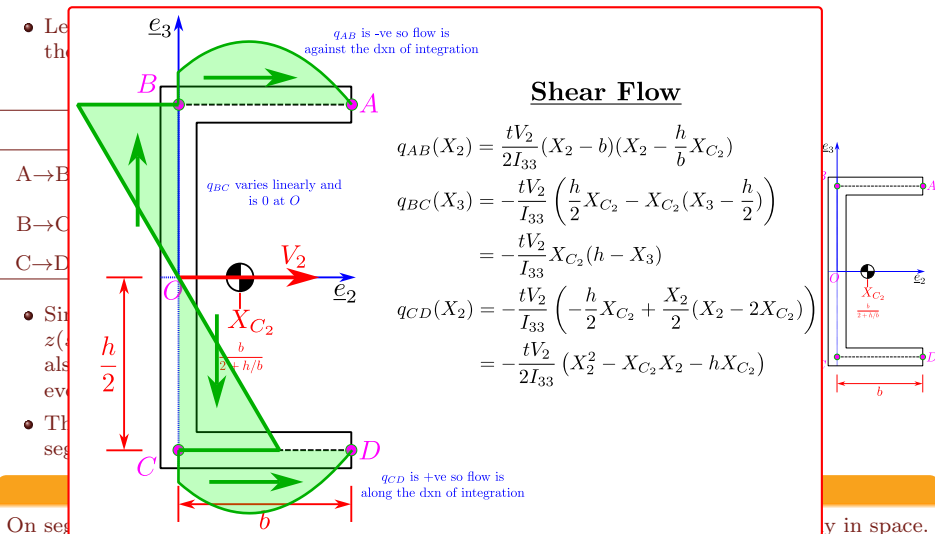

Perpendicular to the direction of the resultant, the shear flow varies linearly in space.


2.1.2. Shear Flow Distribution: The “C” Section

Shear Stress and Flow in Sections

- Now let us repeat the procedure for $V_2 = 0$ but $V_3 \neq 0$, so the shear flow gets written as $q(s) = -\frac{tV_3}{I_{22}}z_3(s)$.

	$s(X_2, X_3)$	X_2	X_3	$z_3 - z_{30}$	$z_{31} - z_{30}$
A→B	$b - X_2$	$b - s$	$\frac{h}{2}$	$-\frac{h}{2}(X_2 - b)$	$\frac{hb}{2}$
B→C	$b + \frac{h}{2} - X_3$	0	X_3	$-\frac{1}{2}(X_3^2 - (\frac{h}{2})^2)$	0
C→D	$b + h + X_2$	$s - (b + h)$	$\frac{h}{2}$	$-\frac{h}{2}X_2$	$-\frac{hb}{2}$


- Once again we see that the flow is **quadratically varying along the resultant and linearly perpendicular to it**.
- We also ensure that the last column sums up to zero.



2.1.2. Shear Flow Distribution: The “C” Section


Shear Stress and Flow in Sections

- No
- ge
- A →
- B →
- C →
- Or
- re
- W

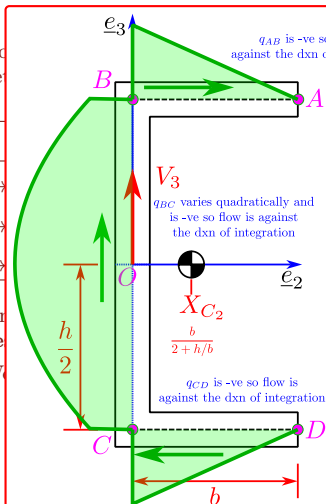


Shear Flow

$$\begin{aligned}
 q_{AB}(X_2) &= \frac{tV_3}{2I_{22}} h(X_2 - b) \\
 q_{BC}(X_3) &= -\frac{tV_3}{I_{22}} \left(\frac{hb}{2} - \frac{(X_3^2 - (\frac{h}{2})^2)}{2} \right) \\
 &= -\frac{tV_3}{2I_{22}} \left(hb + \frac{h^2}{4} - X_3^2 \right) \\
 q_{CD}(X_2) &= -\frac{tV_3}{I_{22}} \left(\frac{hb}{2} - \frac{h}{2} X_2 \right) \\
 &= \frac{tV_3}{2I_{22}} h(X_2 - b)
 \end{aligned}$$



2.1.2. Shear Flow Distribution: The “C” Section


Shear Stress and Flow in Sections

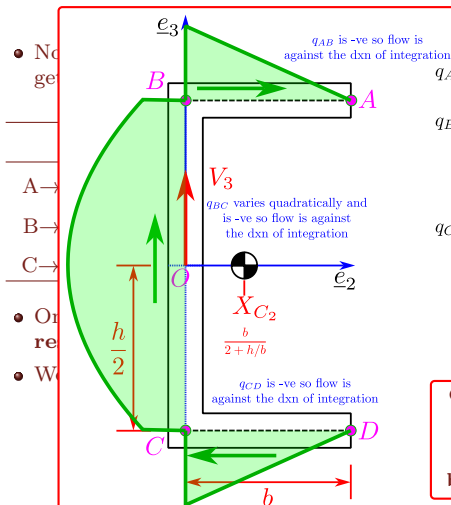

Shear Flow


$$\begin{aligned}
 q_{AB}(X_2) &= \frac{tV_3}{2I_{22}} h(X_2 - b) \\
 q_{BC}(X_3) &= -\frac{tV_3}{I_{22}} \left(\frac{hb}{2} - \frac{(X_3^2 - (\frac{h}{2})^2)}{2} \right) \\
 &= -\frac{tV_3}{2I_{22}} \left(hb + \frac{h^2}{4} - X_3^2 \right) \\
 q_{CD}(X_2) &= -\frac{tV_3}{I_{22}} \left(\frac{hb}{2} - \frac{h}{2} X_2 \right) \\
 &= \frac{tV_3}{2I_{22}} h(X_2 - b)
 \end{aligned}$$

Given this flow, let us now work out the twisting moment M_1 that this results in about the origin O . (Note that we have been assuming $M_1 = 0$ so far)



2.1.2. Shear Flow Distribution: The “C” Section

Shear Stress and Flow in Sections

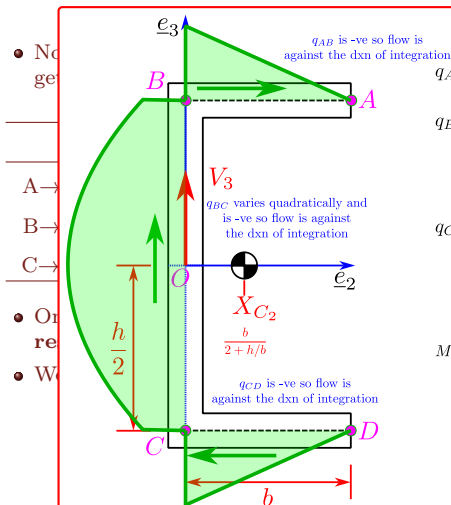


Shear Flow

$$\begin{aligned}
 q_{AB}(X_2) &= \frac{tV_3}{2I_{22}} h(X_2 - b) \\
 q_{BC}(X_3) &= -\frac{tV_3}{I_{22}} \left(\frac{hb}{2} - \frac{(X_3^2 - (\frac{h}{2})^2)}{2} \right) \\
 &= -\frac{tV_3}{2I_{22}} \left(hb + \frac{h^2}{4} - X_3^2 \right) \\
 q_{CD}(X_2) &= -\frac{tV_3}{I_{22}} \left(\frac{hb}{2} - \frac{h}{2} X_2 \right) \\
 &= \frac{tV_3}{2I_{22}} h(X_2 - b)
 \end{aligned}$$

Twisting Moment M_1

$$\begin{aligned}
 M_1 &= \int p q(s) ds \\
 &= \int_b^0 \frac{h}{2} q_{AB}(X_2)(-dX_2) + \int_0^b \frac{h}{2} q_{CD}(X_2) dX_2 \\
 &= \frac{h^2 t V_3}{2I_{22}} \int_0^b (X_2 - b) dX_2 = -\frac{h^2 b^2 t}{4I_{22}} V_3
 \end{aligned}$$

$$M_1 = \xi_s V_3 \Rightarrow \xi_s = -\frac{h^2 b^2 t}{4I_{22}}$$



2.1.2. Shear Flow Distribution: The “C” Section


Shear Stress and Flow in Sections

- Now let us repeat the procedure for $V_2 = 0$ but V_3 gets written as $q(s) = -\frac{tV_3}{I_{22}}z_3(s)$.

	$s(X_2, X_3)$	X_2	X_3	$z_3 -$
A→B	$b - X_2$	$b - s$	$\frac{h}{2}$	$-\frac{h}{2}(X_3 -$
B→C	$b + \frac{h}{2} - X_3$	0	X_3	$-\frac{1}{2}(X_3^2 -$
C→D	$b + h + X_2$	$s - (b + h)$	$\frac{h}{2}$	$-\frac{h}{2}(X_3 -$

- Once again we see that the flow is **quadratically resultant and linearly perpendicular** to it.
- We also ensure that the last column sums up to zero
- After substituting for $I_{22} = \frac{h^2 b t}{2} \left(1 + \frac{h}{6b}\right)$, we obtain

$$\xi_s = -\frac{b/2}{1 + \frac{h}{6b}}$$

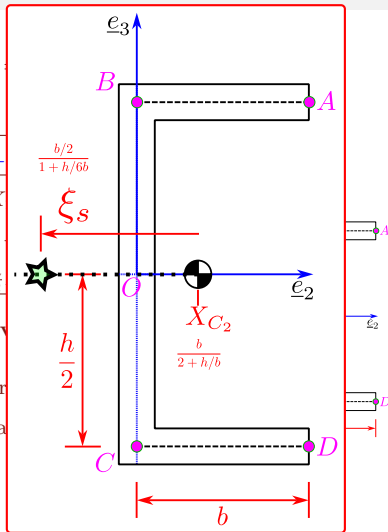

2.1.2. Shear Flow Distribution: The “C” Section

Shear Stress and Flow in Sections


- Now let us repeat the procedure for $V_2 = 0$ but V_3 gets written as $q(s) = -\frac{tV_3}{I_{22}}z_3(s)$.

	$s(X_2, X_3)$	X_2	X_3	$z_3 =$
A→B	$b - X_2$	$b - s$	$\frac{h}{2}$	$-\frac{h}{2}(X_3 - \frac{h}{2})$
B→C	$b + \frac{h}{2} - X_3$	0	X_3	$-\frac{1}{2}(X_3^2 - \frac{h^2}{4})$
C→D	$b + h + X_2$	$s - (b + h)$	$\frac{h}{2}$	$-\frac{h}{2}(X_3 - \frac{h}{2})$

- Once again we see that the flow is **quadratically resultant and linearly perpendicular to it**.
- We also ensure that the last column sums up to zero.
- After substituting for $I_{22} = \frac{h^2bt}{2} \left(1 + \frac{h}{6b}\right)$, we obtain

This point is known as the **Shear Centre** of the section.

$$\xi_s = -\frac{b/2}{1 + \frac{h}{6b}}$$

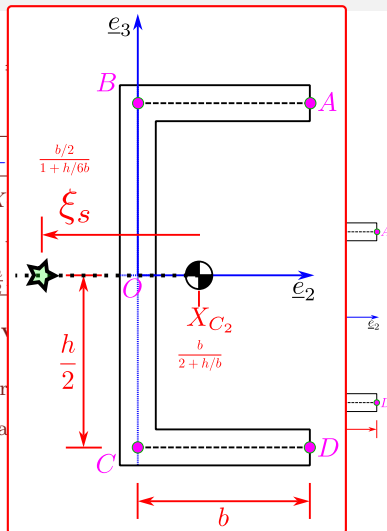

2.1.3. Shear Flow Distribution: The “I” Section

Shear Stress and Flow in Sections


- Consider the shear distribution through an I-section as shown here
- The shear distribution looks like it is “flowing”, with more “flow” occurring in the thin vertical web and less in the flanges.
- The second moment of area I_{22} sums up as,

$$I_{22} = \underbrace{\frac{h^3 t_w}{12}}_{web} + 2 \times \underbrace{\left(\frac{2bt_f^3}{12} + 2bt_f \times \frac{h^2}{4} \right)}_{flange} \approx \frac{h^3 t_w}{12} + h^2 bt_f.$$

- I_{33} sums up as,

$$I_{33} = \underbrace{\frac{ht_w^3}{12}}_{web} + 2 \times \underbrace{\left(\frac{2b^3 t_f}{3} \right)}_{flange} \approx \frac{4b^3 t_f}{3}.$$

- Recall that the stress distribution in this case ($I_{23} = 0$) is $\sigma_{11} = \frac{M_2}{I_{22}} X_3 - \frac{M_3}{I_{33}} X_2$. So I_{22} governs bending in the $\underline{e}_2$ direction and I_{33} governs bending in the $\underline{e}_3$ direction.

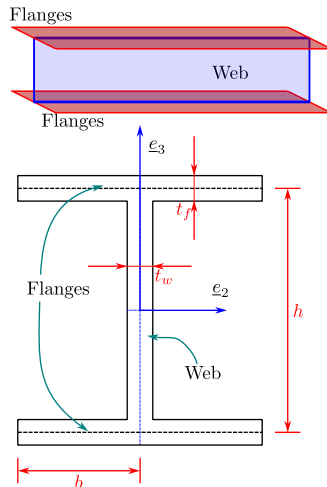

2.1.3. Shear Flow Distribution: The “I” Section

Shear Stress and Flow in Sections

- Consider the shear distribution through an I-section as shown here


Both I_{22} and I_{33} have a term that's proportional to t_f . For bending purposes, in fact, it is more efficient use of material to move the flanges far apart ($h \uparrow$) and make the web very thin ($t_w \downarrow$).

$$I_{22} = \underbrace{\frac{h^3 t_w}{12}}_{\text{web}} + 2 \times \underbrace{\left(\frac{2bt_f^3}{12} + 2bt_f \times \frac{h^2}{4} \right)}_{\text{flange}} \approx \frac{h^3 t_w}{12} + h^2 b t_f.$$

- I_{33} sums up as,

$$I_{33} = \underbrace{\frac{ht_w^3}{12}}_{\text{web}} + 2 \times \underbrace{\left(\frac{2b^3 t_f}{3} \right)}_{\text{flange}} \approx \frac{4b^3 t_f}{3}.$$

- Recall that the stress distribution in this case ($I_{23} = 0$) is $\sigma_{11} = \frac{M_2}{I_{22}} X_3 - \frac{M_3}{I_{33}} X_2$. So I_{22} governs bending in the $\underline{e}_2$ direction and I_{33} governs bending in the $\underline{e}_3$ direction.

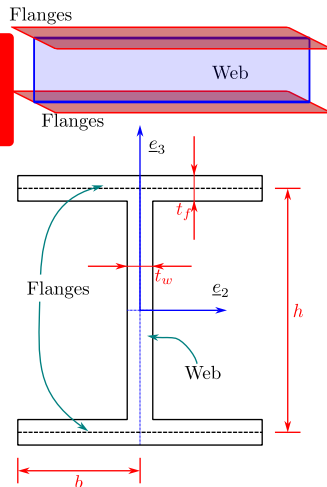

2.1.3. Shear Flow Distribution: The “I” Section

Shear Stress and Flow in Sections

- Consider the shear distribution through an I-section as shown here

Both I_{22} and I_{33} have a term that's proportional to t_f . For bending purposes, in fact, it is more efficient use of material to move the flanges far apart ($h \uparrow$) and make the web very thin ($t_w \downarrow$).


$$I_{22} = \underbrace{\frac{h^3 t_w}{12}}_{\text{web}} + 2 \times \underbrace{\left(\frac{2bt_f^3}{12} + 2bt_f \times \frac{h^2}{4} \right)}_{\text{flange}} \approx \frac{h^3 t_w}{12} + h^2 bt_f.$$

Design Principle

- Design the flanges to bear all the bending stresses.
- Design the web to "survive" the shear.

$$I_{33} = \underbrace{\frac{12}{web}}_{\text{web}} + 2 \times \left(\frac{1}{3} \right) \approx \frac{1}{3}.$$

- Recall that the stress distribution in this case ($I_{23} = 0$) is $\sigma_{11} = \frac{M_2}{I_{22}} X_3 - \frac{M_3}{I_{33}} X_2$. So I_{22} governs bending in the $\underline{e}_2$ direction and I_{33} governs bending in the $\underline{e}_3$ direction.

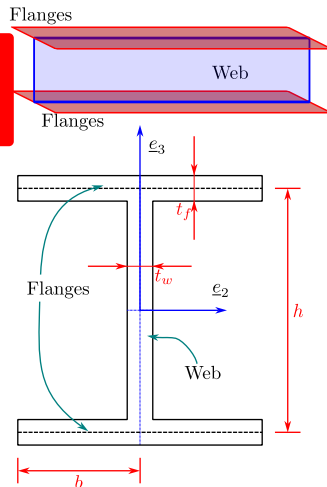

2.1.3. Shear Flow Distribution: The “I” Section


Shear Stress and Flow in Sections

- Let us now calculate the actual shear stress distribution for the I section. We label the section as shown and write up a table as follows:

Shear flow table for the I-section

	t	$s(X_2, X_3)$	X_2	X_3	$[X_{20}, X_{21}]$	$[X_{30}, X_{31}]$
A-B	t_y	$b + X_2$	$s - b$	$\frac{h}{2}$	$[-b, 0]$	—
C-B	t_y	$b - X_2$	$b - s$	$\frac{h}{2}$	$[b, 0]$	—
D-E	t_y	$b + X_2$	$s - b$	$-\frac{h}{2}$	$[-b, 0]$	—
F-E	t_y	$b - X_2$	$b - s$	$-\frac{h}{2}$	$[b, 0]$	—
E-B	t_w	$\frac{h}{2} + X_3$	0	$s - \frac{h}{2}$	—	$[-\frac{h}{2}, \frac{h}{2}]$

- $[X_{20}, X_{21}]$ and $[X_{30}, X_{31}]$ are the domains of each of the segments.

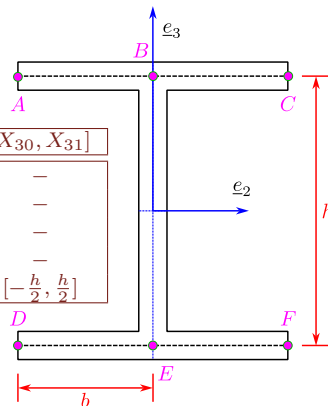

2.1.3. Shear Flow Distribution: The “I” Section

Shear Stress and Flow in Sections

- Let us now calculate the actual shear stress distribution for the I section. We label the section as shown and write up a table as follows:


Shear flow table for the I-section

	t	$s(X_2, X_3)$	X_2	X_3	$[X_{20}, X_{21}]$	$[X_{30}, X_{31}]$
A-B	t_y	$b + X_2$	$s - b$	$\frac{h}{2}$	$[-b, 0]$	—
C-B	t_y	$b - X_2$	$b - s$	$\frac{h}{2}$	$[b, 0]$	—
D-E	t_y	$b + X_2$	$s - b$	$-\frac{h}{2}$	$[-b, 0]$	—
F-E	t_y	$b - X_2$	$b - s$	$-\frac{h}{2}$	$[b, 0]$	—
E-B	t_w	$\frac{h}{2} + X_3$	0	$s - \frac{h}{2}$	—	$[-\frac{h}{2}, \frac{h}{2}]$

- $[X_{20}, X_{21}]$ and $[X_{30}, X_{31}]$ are the domains of each of the segments.
- The shear flow integral is written as

$$\begin{aligned}
 q(s) - q_0 &= -\frac{V_2}{I_{33}} \int_0^s \overbrace{tX_2 ds}^{z_2(s)} - \frac{V_3}{I_{22}} \int_0^s \overbrace{tX_3 ds}^{z_3(s)} \\
 &= -\frac{V_2}{I_{33}} z_2(s) - \frac{V_3}{I_{22}} z_3(s).
 \end{aligned}$$

We will compute the z_2 and z_3 functions (in terms of X_2, X_3) and add them to the table above

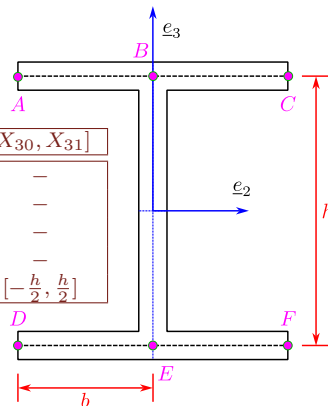

2.1.3. Shear Flow Distribution: The “I” Section

Shear Stress and Flow in Sections

$$q(s) - q_0 = -\frac{V_2}{I_{33}} \int_0^s t X_2 ds - \frac{V_3}{I_{22}} \int_0^s t X_3 ds = -\frac{V_2}{I_{33}} z_2(s) - \frac{V_3}{I_{22}} z_3(s).$$

Shear flow table for the I-section

	t	$s(X_2, X_3)$	X_2	X_3	$[X_{20}, X_{21}]$	$[X_{30}, X_{31}]$	$z_2 - z_{20}$	$z_3 - z_{30}$
A-B	t_f	$b + X_2$	$s - b$	$\frac{h}{2}$	$[-b, 0]$	—	$t_f \frac{X_2^2 - b^2}{2}$	$t_f \frac{h(X_2 + b)}{2}$
C-B	t_f	$b - X_2$	$b - s$	$\frac{h}{2}$	$[b, 0]$	—	$-t_f \frac{X_2^2 - b^2}{2}$	$-t_f \frac{h(X_2 - b)}{2}$
D-E	t_f	$b + X_2$	$s - b$	$-\frac{h}{2}$	$[-b, 0]$	—	$t_f \frac{X_2^2 - b^2}{2}$	$-t_f \frac{h(X_2 + b)}{2}$
F-E	t_f	$b - X_2$	$b - s$	$-\frac{h}{2}$	$[b, 0]$	—	$-t_f \frac{X_2^2 - b^2}{2}$	$t_f \frac{h(X_2 - b)}{2}$
E-B	t_w	$\frac{h}{2} + X_3$	0	$s - \frac{h}{2}$	—	$[-\frac{h}{2}, \frac{h}{2}]$	0	$t_w \frac{X_3^2 - (\frac{h}{2})^2}{2}$

- We now have all the terms necessary for furnishing the shear flow formula above.
- Noting that $q(s) = 0$ at all the 4 free tips (A,B,C,D here), q_0 for these integrals can safely be taken as zero. **But what about the section E – B ?**

2.1.3. Shear Flow Distribution: The “I” Section


Shear Stress and Flow in Sections

$$q(s) - q_0 = -\frac{V_2}{I_{33}} \int_0^s t X_2 ds - \frac{V_3}{I_{22}} \int_0^s t X_3 ds = -\frac{V_2}{I_{33}} z_2(s) - \frac{V_3}{I_{22}} z_3(s).$$

Shear flow table for the I-section

Balance at the T-junction

	t
A-B	t_f
C-B	t_f
D-E	t_f
F-E	t_f
E-B	t_w

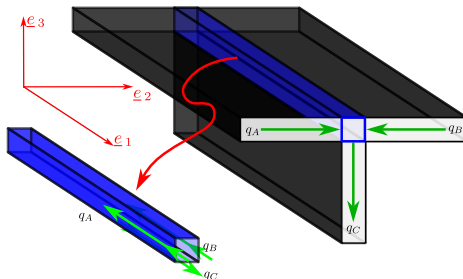

$$\sum F = q_A + q_B - q_C = 0 \Rightarrow q_C = q_A + q_B$$

	$z_2 - z_{20}$	$z_3 - z_{30}$
	$t_f \frac{X_2^2 - b^2}{2}$	$t_f \frac{h(X_2 + b)}{2}$
	$-t_f \frac{X_2^2 - b^2}{2}$	$-t_f \frac{h(X_2 - b)}{2}$
	$t_f \frac{X_2^2 - b^2}{2}$	$-t_f \frac{h(X_2 + b)}{2}$
	$-t_f \frac{X_2^2 - b^2}{2}$	$t_f \frac{h(X_2 - b)}{2}$
	0	$t_w \frac{X_3^2 - (\frac{h}{2})^2}{2}$

- We now have the shear flow formula above.
- Noting that $q(s) = 0$ at all the 4 free tips (A,B,C,D here), q_0 for these integrals can safely be taken as zero. **But what about the section E – B ?**

2.1.3. Shear Flow Distribution: The “I” Section

Shear Stress and Flow in Sections

- Since z_2 and z_3 are running integrals, we will also tabulate their values at the “end” of each segment.

Shear flow table for the I-section

	$z_2 - z_{20}$	$z_{21} - z_{20}$	$z_3 - z_{30}$	$z_{31} - z_{30}$
A-B	$t_f \frac{X_2^2 - b^2}{2}$	$-\frac{t_f b^2}{2}$	$t_f \frac{h(X_2 + b)}{2}$	$\frac{t_f hb}{2}$
C-B	$-t_f \frac{X_2^2 - b^2}{2}$	$\frac{t_f b^2}{2}$	$-t_f \frac{h(X_2 - b)}{2}$	$\frac{t_f hb}{2}$
D-E	$t_f \frac{X_2^2 - b^2}{2}$	$-\frac{t_f b^2}{2}$	$-t_f \frac{h(X_2 + b)}{2}$	$-\frac{t_f hb}{2}$
F-E	$-t_f \frac{X_2^2 - b^2}{2}$	$\frac{t_f b^2}{2}$	$t_f \frac{h(X_2 - b)}{2}$	$-\frac{t_f hb}{2}$
E-B	0	0	$t_w \frac{X_3^2 - (\frac{h}{2})^2}{2}$	0


- At the junction E, the shear flow will be a sum of the contributions from the segments D-E and F-E. In terms of the z_2, z_3 functions this turns out as,

$$z_2 \Big|_E = -\frac{t_f b^2}{2} + \frac{t_f b^2}{2} = 0, \quad z_3 \Big|_E = -\frac{t_f hb}{2} - \frac{t_f hb}{2} = -t_f hb.$$

2.1.3. Shear Flow Distribution: The “I” Section

Shear Stress and Flow in Sections

- Let us consider the case with $V_2 = 0$, $V_3 \neq 0$ graphically.
- The segments $A \rightarrow B$, $C \rightarrow B$, $D \rightarrow E$, and $F \rightarrow E$ are exposed in their free ends, simplifying the shear flow integral ($q = 0$ at free ends).

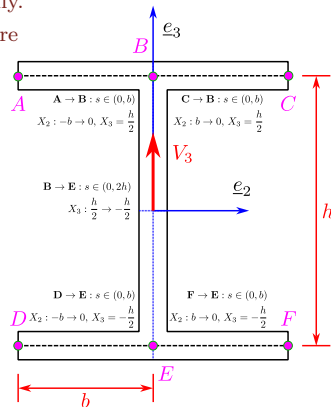


2.1.3. Shear Flow Distribution: The “I” Section

Shear Stress and Flow in Sections

- Let us consider the case with $V_2 = 0$, $V_3 \neq 0$ graphically.
- The segments $A \rightarrow B$, $C \rightarrow B$, $D \rightarrow E$, and $F \rightarrow E$ are exposed in their free ends, simplifying the shear flow integral ($q = 0$ at free ends).

$$\mathbf{A} \rightarrow \mathbf{B} : q_{AB}(s) \equiv q_{AB}(X_2) = -\frac{V_3}{I_{22}} z_3(s) = -\frac{V_3}{I_{22}} t_f \frac{h(X_2+b)}{2}$$

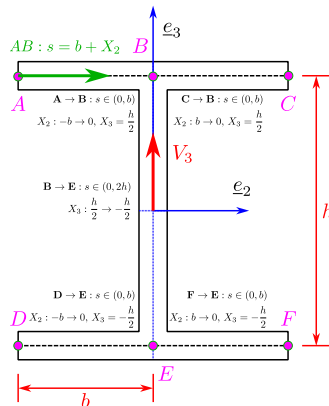


2.1.3. Shear Flow Distribution: The “I” Section

Shear Stress and Flow in Sections

- Let us consider the case with $V_2 = 0$, $V_3 \neq 0$ graphically.
- The segments $A \rightarrow B$, $C \rightarrow B$, $D \rightarrow E$, and $F \rightarrow E$ are exposed in their free ends, simplifying the shear flow integral ($q = 0$ at free ends).

$$\begin{aligned} \mathbf{A} \rightarrow \mathbf{B} : q_{AB}(s) &\equiv q_{AB}(X_2) = -\frac{V_3}{I_{22}} z_3(s) = \\ &= -\frac{V_3}{I_{22}} t_f \frac{h(X_2+b)}{2} \end{aligned}$$

$$\mathbf{C} \rightarrow \mathbf{B} : q_{CB}(X_2) = \frac{V_3}{I_{22}} t_f \frac{h(X_2-b)}{2}$$

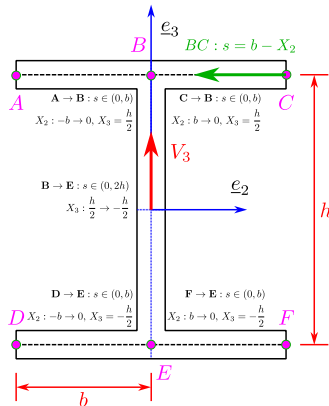

2.1.3. Shear Flow Distribution: The “I” Section


Shear Stress and Flow in Sections

- Let us consider the case with $V_2 = 0$, $V_3 \neq 0$ graphically.
- The segments $A \rightarrow B$, $C \rightarrow B$, $D \rightarrow E$, and $F \rightarrow E$ are exposed in their free ends, simplifying the shear flow integral ($q = 0$ at free ends).

$$\begin{aligned} A \rightarrow B : q_{AB}(s) &\equiv q_{AB}(X_2) = -\frac{V_3}{I_{22}} z_3(s) = \\ &= -\frac{V_3}{I_{22}} t_f \frac{h(X_2+b)}{2} \end{aligned}$$

$$C \rightarrow B : q_{CB}(X_2) = \frac{V_3}{I_{22}} t_f \frac{h(X_2-b)}{2}$$

$$D \rightarrow E : q_{DE}(X_3) = \frac{V_3}{I_{22}} t_f \frac{h(X_2+b)}{2}$$

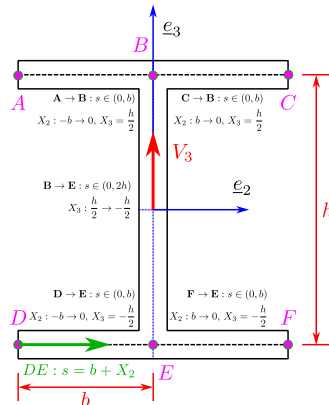

2.1.3. Shear Flow Distribution: The “I” Section

Shear Stress and Flow in Sections


- Let us consider the case with $V_2 = 0$, $V_3 \neq 0$ graphically.
- The segments $A \rightarrow B$, $C \rightarrow B$, $D \rightarrow E$, and $F \rightarrow E$ are exposed in their free ends, simplifying the shear flow integral ($q = 0$ at free ends).

$$\begin{aligned} \mathbf{A} \rightarrow \mathbf{B} : q_{AB}(s) &\equiv q_{AB}(X_2) = -\frac{V_3}{I_{22}} z_3(s) = \\ &= -\frac{V_3}{I_{22}} t_f \frac{h(X_2+b)}{2} \end{aligned}$$

$$\mathbf{C} \rightarrow \mathbf{B} : q_{CB}(X_2) = \frac{V_3}{I_{22}} t_f \frac{h(X_2-b)}{2}$$

$$\mathbf{D} \rightarrow \mathbf{E} : q_{DE}(X_2) = \frac{V_3}{I_{22}} t_f \frac{h(X_2+b)}{2}$$


$$\mathbf{F} \rightarrow \mathbf{E} : q_{FE}(X_2) = -\frac{V_3}{I_{22}} t_f \frac{h(X_2-b)}{2}$$

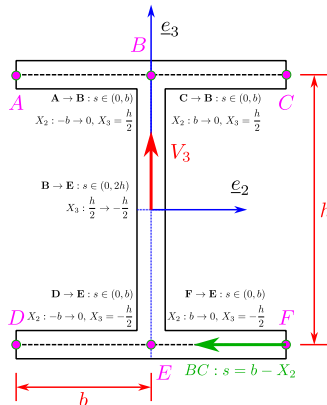

2.1.3. Shear Flow Distribution: The “I” Section

Shear Stress and Flow in Sections

- Let us consider the case with $V_2 = 0$, $V_3 \neq 0$ graphically.
- The segments $A \rightarrow B$, $C \rightarrow B$, $D \rightarrow E$, and $F \rightarrow E$ are exposed in their free ends, simplifying the shear flow integral ($q = 0$ at free ends).
- In summary we have linear shear flow trends at the flanges.

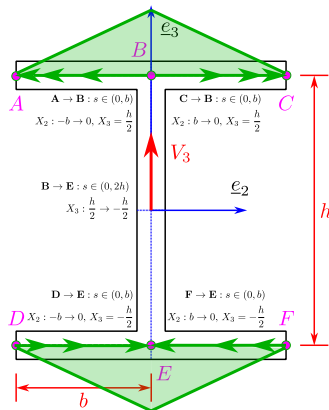


2.1.3. Shear Flow Distribution: The “T” Section

Shear Stress and Flow in Sections

- Let us consider the case with $V_2 = 0$, $V_3 \neq 0$ graphically.
- The segments $A \rightarrow B$, $C \rightarrow B$, $D \rightarrow E$, and $F \rightarrow E$ are exposed in their free ends, simplifying the shear flow integral ($q = 0$ at free ends).
- In summary we have linear shear flow trends at the flanges.
- For the web ($E \rightarrow B$), we recall the balance at the “T” junction.

Balance at the T-junction




2.1.3. Shear Flow Distribution: The “I” Section

Shear Stress and Flow in Sections

- Let us consider the case with $V_2 = 0$, $V_3 \neq 0$ graphically.
- The segments $A \rightarrow B$, $C \rightarrow B$, $D \rightarrow E$, and $F \rightarrow E$ are exposed in their free ends, simplifying the shear flow integral ($q = 0$ at free ends).
- On $\mathbf{E} \rightarrow \mathbf{B}$, we have

$$q_{EB}(0) = q_{DE}(0) + q_{FE}(0) = \frac{V_3}{I_{22}} t_f h b.$$
- The integration evaluates as,

$$\begin{aligned} q_{EB}(X_3) &= -\frac{V_3}{I_{22}} \left(-t_f h b + \frac{t_w}{2} (X_3^2 - (\frac{h}{2})^2) \right) \\ &= \frac{h V_3}{I_{22}} (t_f b + \frac{t_w h}{8}) - \frac{V_3}{I_{22}} \frac{t_w}{2} X_3^2. \end{aligned}$$

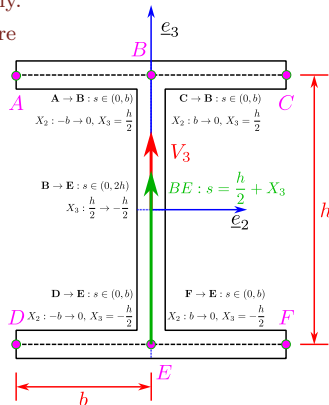

2.1.3. Shear Flow Distribution: The “I” Section


Shear Stress and Flow in Sections

- Let us consider the case with $V_2 = 0$, $V_3 \neq 0$ graphically.
- The segments $A \rightarrow B$, $C \rightarrow B$, $D \rightarrow E$, and $F \rightarrow E$ are exposed in their free ends, simplifying the shear flow integral ($q = 0$ at free ends).
- On $\mathbf{E} \rightarrow \mathbf{B}$, we have

$$q_{EB}(0) = q_{DE}(0) + q_{FE}(0) = \frac{V_3}{I_{22}} t_f h b.$$
- The integration evaluates as,

$$\begin{aligned} q_{EB}(X_3) &= -\frac{V_3}{I_{22}} \left(-t_f h b + \frac{t_w}{2} (X_3^2 - (\frac{h}{2})^2) \right) \\ &= \frac{h V_3}{I_{22}} (t_f b + \frac{t_w h}{8}) - \frac{V_3}{I_{22}} \frac{t_w}{2} X_3^2. \end{aligned}$$

- We now have the complete shear flow in the section.

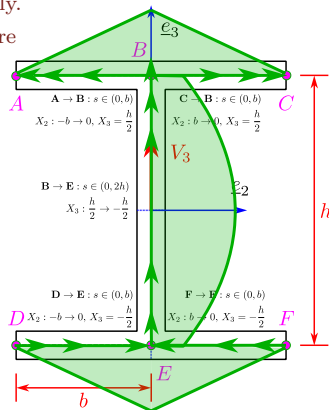


2.1.3. Shear Flow Distribution: The “I” Section


Shear Stress and Flow in Sections

Numerical Example


$b = 50.0 \text{ mm}$, $h = 75.0 \text{ mm}$, $t_f = 3.0 \text{ mm}$, $t_w = 1.0 \text{ mm}$



Resultant $V_2 = 1, V_3 = 0$



Resultant $V_2 = 0, V_3 = 1$



- We now have the complete shear flow in the section.

2. Shear Stress and Flow in Sections

The “I” section: Order of Magnitude Analysis

- Let us consider the “total” shear forces experienced by each member.

- Flange AB**

$$V_{AB} = -\frac{V_3}{I_{22}} \frac{ht_f}{2} \int_{-b}^0 (X_2 + b) dX_2 = -\frac{b^2 ht_f V_3}{4I_{22}}$$


- Web BE**

$$V_{EB} = \frac{h^2(h + 12b)tV_3}{12I_{22}} = V_3$$

- For $b = \frac{h}{2}$, we have,

$$V_{AB} = -\frac{h^3 t V_3}{16 I_{22}} \approx -\frac{V_3}{8}$$

$$V_{EB} = V_3$$

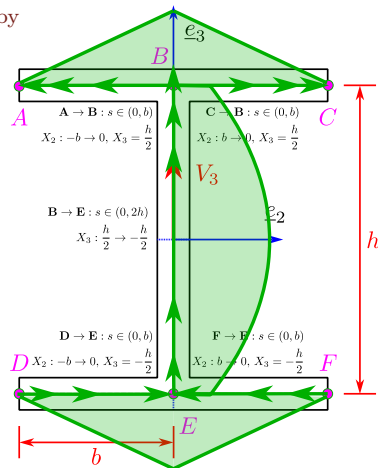

2. Shear Stress and Flow in Sections

The “I” section: Order of Magnitude Analysis

- Let us consider the “total” shear forces experienced by each member.

• Flange AB

$$V_{AB} = -\frac{V_3}{I_{22}} \frac{ht_f}{2} \int_{-b}^0 (X_2 + b) dX_2 = -\frac{b^2 ht_f V_3}{4I_{22}}$$


• Web BE

$$V_{EB} = \frac{h^2(h + 12b)tV_3}{12I_{22}} = V_3$$

- For $b = \frac{h}{2}$, we have,


$$V_{AB} = -\frac{h^3 t V_3}{16 I_{22}} \approx -\frac{V_3}{8}$$

$$V_{EB} = V_3$$

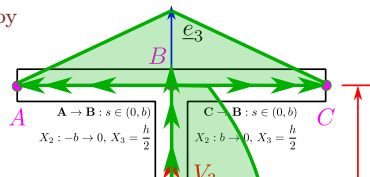


Simplification Observation

Since $V_{AB} \ll V_{BE}$, we understand that the **web is primarily responsible for restoring shear loads**, with negligible contributions from the flanges.



2. Shear Stress and Flow in Sections

An “I” section beam subjected to 3-point bending: Finite Element Results

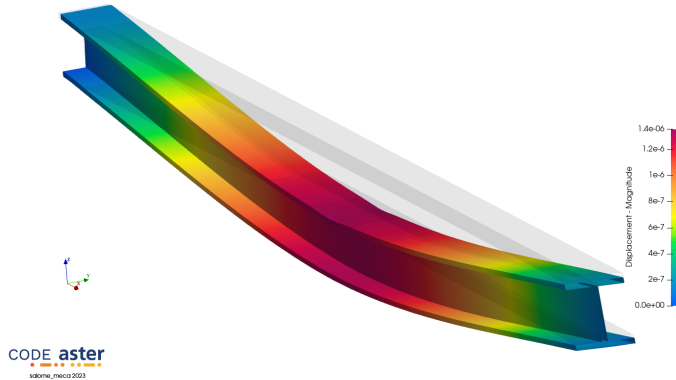


Code_Aster on the Salome Platform

Free and Open Source (FOSS) FE solver that comes with a fully functional frontend (Salome)! Please Do Explore!




2. Shear Stress and Flow in Sections

An "I" section beam subjected to 3-point bending: Finite Element Results

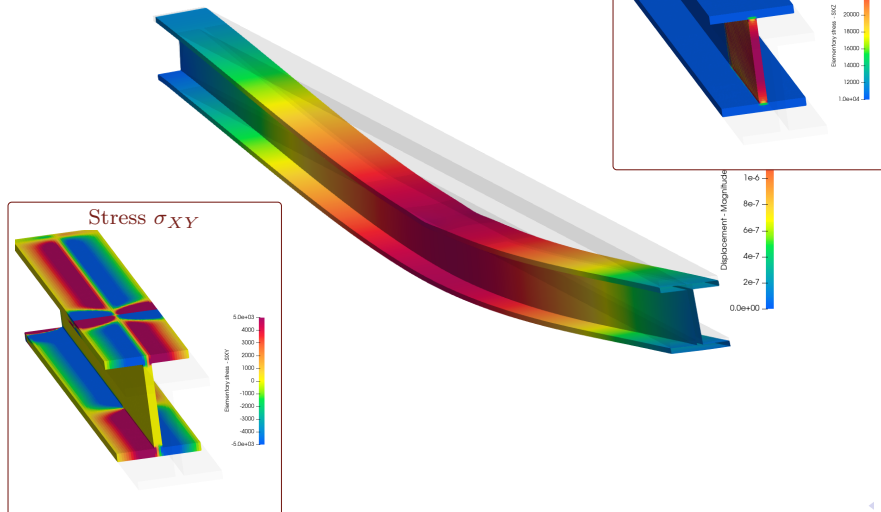

2. Shear Stress and Flow in Sections

An "I" section beam subjected to 3-point bending: Finite Element Results

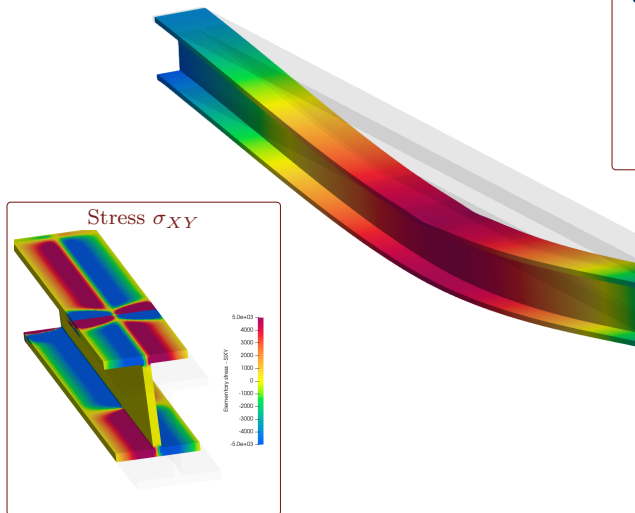


2.2. Closed Sections

Shear Stress and Flow in Sections

- The shear-flow integral formula makes no reference to whether the section is open or closed.
- Considering the generic closed section shown, we start the integral at some **arbitrary** point A . The integral is then written as,

$$q(s) - q_A = - \underbrace{\int_0^s t \sigma_{11,1} ds}_{q_b(s)}.$$

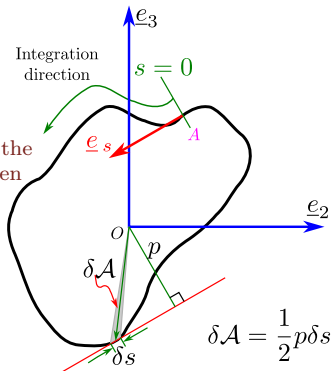

- When no twisting is expected at the section, the moment along $\underline{e}_1$ about O has to be zero. This is computed as,

$$\int_{A^-}^{A^+} dM_1 = \oint p q(s) ds = q_A \underbrace{\oint p q(s) ds}_{2\mathcal{A}} + \oint p q_b(s) ds = 0 \Rightarrow \boxed{q_A = -\frac{1}{2\mathcal{A}} \oint p q_b(s) ds}.$$


2.2. Closed Sections

Shear Stress and Flow in Sections

- The shear-flow integral formula makes no reference to whether the section is open or closed.
- Considering the generic closed section shown, we start the integral at some **arbitrary** point A . The integral is then

Are we already assuming that O is the shear center with this?!

$$\underbrace{J_0}_{q_b(s)}$$

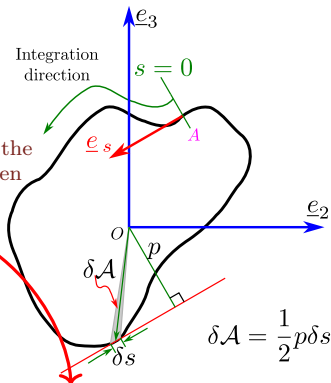

- When no twisting is expected at the section, the moment along $\underline{e}_1$ about O has to be zero. This is computed as,

$$\int_{A^-}^{A^+} dM_1 = \oint pq(s)ds = q_A \underbrace{\oint pq(s)ds}_{2\mathcal{A}} + \oint pq_b(s)ds = 0 \implies q_A = -\frac{1}{2\mathcal{A}} \oint pq_b(s)ds.$$


2.2. Closed Sections

Shear Stress and Flow in Sections

- The shear-flow integral formula makes no reference to whether the section is open or closed.
- Considering the generic closed section shown, we start the integral at some **arbitrary** point A . The integral is then

Are we already assuming that O is the shear center with this?!

Yes. We need to add an extra term when resultants V_2, V_3 are acting with an offset.

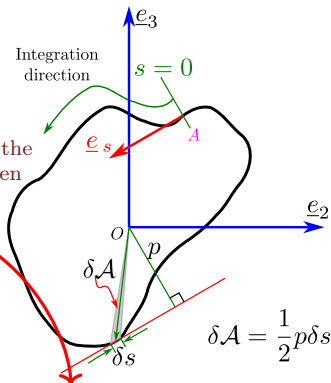

- When no twisting is expected at the section, **the moment along $\underline{e}_1$ about O has to be zero**. This is computed as,

$$\int_{A^-}^{A^+} dM_1 = \oint pq(s)ds = q_A \overbrace{\oint pq(s)ds}^{2A} + \oint pq_b(s)ds = 0 \implies \boxed{q_A = -\frac{1}{2A} \oint pq_b(s)ds}.$$

2.2. Closed Sections: Shear Center


Shear Stress and Flow in Sections

- If we suppose that the resultants are acting along some (ξ_2, ξ_3) , the applied moment is:
 $(\xi_2 \underline{e}_2 + \xi_3 \underline{e}_3) \times (V_2 \underline{e}_2 + V_3 \underline{e}_3)$:

$$M_1 = \xi_2 V_3 - \xi_3 V_2.$$

- Equating this to the moment developed from the shear flow distribution, we get:

$$\xi_2 V_3 - \xi_3 V_2 = 2\mathcal{A}q_{A-} + \oint pq_b(s)ds$$



- For shear center determination (the point around which resultants act), this is not enough.
- We will additionally invoke an argument of **zero twist** ($\theta_{1,1} = 0$) in the deflection field to get an additional relationship ($\oint \frac{q}{Gt} ds = 0$). **This will be covered in the next module (Torsion).**
- For symmetric closed sections**, however, the shear center coincides with the centroid (through symmetry arguments).

2.2.1. The Rectangular “Box” Section

Closed Sections

To avoid confusion choose a clock-wise integration direction always!

- Let us consider the rectangular beam for V_3 alone.
- We start the integration from point A arbitrarily.


- The shear flow equation is $q(s) - q_A = -\frac{tV_3}{I_{22}} \int_0^s X_3 ds = -\frac{tV_3}{I_{22}} \underbrace{(z_3(s) - z_A)}_{z_{3b}(s)}$.

- We write down the table as follows:

	$s(X_2, X_3)$	X_3	$z_3 - z_{30}$	$z_{31} - z_{30}$	$z_{3b}(X_2, X_3)$
A→B	$\frac{b}{2} - X_2$	$\frac{h}{2}$	$-\frac{h}{2}(X_2 - \frac{b}{2})$	$\frac{hb}{2}$	$-\frac{h}{2}(X_2 - \frac{b}{2})$
B→C	$b + \frac{h}{2} - X_3$	X_3	$-\frac{1}{2}(X_3^2 - (\frac{h}{2})^2)$	0	$\frac{hb}{2} - \frac{1}{2}(X_3^2 - (\frac{h}{2})^2)$
C→D	$\frac{3b}{2} + h + X_2$	$-\frac{h}{2}$	$-\frac{h}{2}(X_2 + \frac{b}{2})$	$-\frac{hb}{2}$	$-\frac{h}{2}(X_2 - \frac{b}{2})$
D→A	$2b + \frac{3h}{2} + X_3$	X_3	$\frac{1}{2}(X_3^2 - (\frac{h}{2})^2)$	0	$\frac{1}{2}(X_3^2 - (\frac{h}{2})^2)$

- The zero twist condition can be interpreted as saying that the moment about O is zero:


$$M_O = \oint pq(s)ds = 0 \implies z_A(-2bh) + \oint p \cdot z_3(s)ds = 0$$




2.2.1. The Rectangular “Box” Section

Closed Sections

To avoid confusion choose a clock-wise integration direction always!



Choosing a non-centroidal point as the center of moment is sometimes helpful. Always remember this construction:

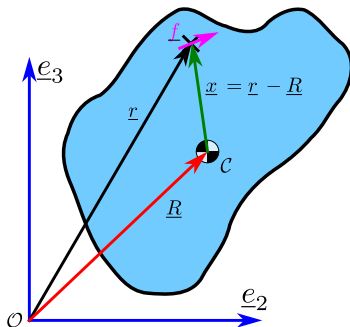

Moment about Centroid C

$$\begin{aligned}
 \underline{M}_C &= \int_{\Omega} \underline{x} \times \underline{f} d\Omega \\
 &= \int_{\Omega} (\underline{r} - \underline{R}) \times \underline{f} d\Omega \\
 &= \int_{\Omega} \underline{r} \times \underline{f} d\Omega - \underline{R} \times \int_{\Omega} \underline{f} d\Omega \\
 &= \underline{M}_O - \underline{R} \times \underline{F}
 \end{aligned}$$

- The zero twist condition can be interpreted as saying that the moment about O is zero:

$$M_O = \oint p q(s) ds = 0 \implies z_A(-2bh) + \oint p \cdot z_3(s) ds = 0$$

2.2.1. The Rectangular “Box” Section


Closed Sections

- Based on the above construction, we have

$$M_O = M_C - \frac{V_3 b}{2} = 0.$$

- The moment w.r.t. C is written as

$$M_C = -\frac{tV_3}{I_{22}} \oint p(z_A + z_{3b}(s))ds = -\frac{tV_3}{I_{22}} \left(2bhz_A + \oint pz_{3b}(s)ds \right).$$



Let us evaluate the last integral using the table (you can just add columns):


	$s(X_2, X_3)$	p	$z_{3b}(X_2, X_3)$	$\int_{s_0}^{s_1} pz_{3b}(s)ds$
A→B	$\frac{b}{2} - X_2$	h	$-\frac{h}{2}(X_2 - \frac{b}{2})$	$\frac{h^2 b^2}{4}$
B→C	$b + \frac{h}{2} - X_3$	0	$\frac{hb}{2} - \frac{1}{2}(X_3^2 - (\frac{h}{2})^2)$	0
C→D	$\frac{3b}{2} + h + X_2$	0	$-\frac{h}{2}(X_2 - \frac{b}{2})$	0
D→A	$2b + \frac{3h}{2} + X_3$	b	$\frac{1}{2}(X_3^2 - (\frac{h}{2})^2)$	$-\frac{bh^3}{12}$

- Summing up the last column we can write

$$M_C = -V_3 \left(\frac{2bht}{I_{22}} z_A + \frac{h^2 bt}{12I_{22}} (3b - h) \right)$$

2.2.1. The Rectangular “Box” Section

Closed Sections



- The zero twist condition reads:

$$M_C = -V_3 \left(\frac{2bht}{I_{22}} z_A + \frac{h^2bt}{12I_{22}} (3b - h) \right) = \frac{V_3 b}{2}.$$

- Solving this for z_A we get


$$z_A = -\frac{hb}{8} + \frac{h^2}{24} - \frac{I_{22}}{4ht}.$$

- The second area moment is $I_{22} = \frac{h^2t}{6}(3b + h)$. Substituting this we get $z_A = -\frac{hb}{4}$.
- Adding this to $z_{3b}(s)$ we can write $z_3(s)$ s.t. $q(s) = -\frac{tV_3}{I_{22}} z_3(s)$:


	$A \rightarrow B$	$B \rightarrow C$	$C \rightarrow D$	$D \rightarrow A$
$z_3(s)$	$-\frac{h}{2}X_2$	$\frac{hb}{4} - \frac{1}{2}(X_3^2 - (\frac{h}{2})^2)$	$-\frac{h}{2}X_2$	$-\frac{hb}{4} + \frac{1}{2}(X_3^2 - (\frac{h}{2})^2)$

2.2.1. The Rectangular “Box” Section

Closed Sections

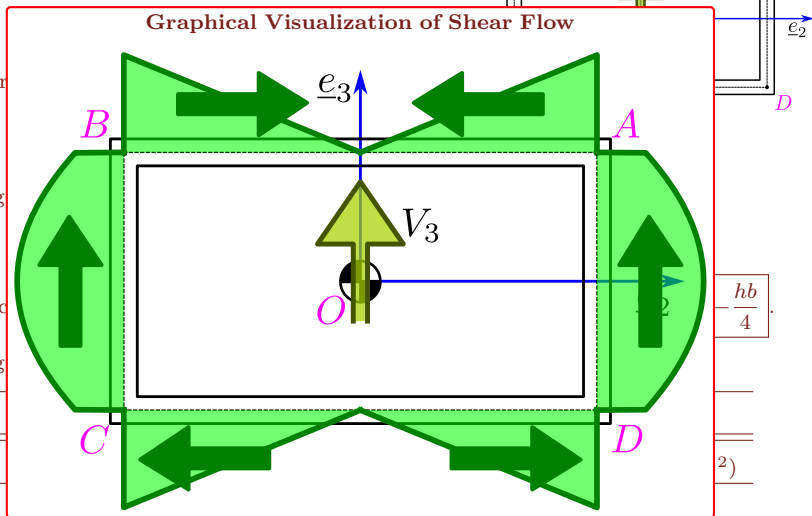

3. Stringer-Web Idealization




- A stringer, when looked at from a section, looks like a feature with a sudden increase in thickness.
- Consider the r^{th} “Boom” to be located at (X_{r2}, X_{r3}) , with area A_r .
- So the shear flow integral can be generalized to,

$$q(s) - q(0) = - \frac{\left[\int_0^s t X_2 ds + \sum_r A_r X_{r2} \quad \int_0^s t X_3 ds + \sum_r A_r X_{r3} \right]}{I_{22} I_{33} - I_{23}^2} \begin{bmatrix} I_{22} & -I_{23} \\ -I_{23} & I_{22} \end{bmatrix} \begin{bmatrix} V_2 \\ V_3 \end{bmatrix}$$

- It is sometimes possible to also “lump” the effects of the skins (with thickness t) into the boom areas to simplify the above

$$q(s) - q(0) = - \frac{[\sum_r A_r X_{r2} \quad \sum_r A_r X_{r3}]}{I_{22} I_{33} - I_{23}^2} \begin{bmatrix} I_{22} & -I_{23} \\ -I_{23} & I_{33} \end{bmatrix} \begin{bmatrix} V_2 \\ V_3 \end{bmatrix}$$

- This is known as **Stringer-Web Idealization**.




3. Stringer-Web Idealization

- Considering the integral right across the boom, we have,

$$q^+ - q^- = - \frac{[A_r X_{r3} \quad -A_r X_{r2}]}{I_{22} I_{33} - I_{23}^2} \begin{bmatrix} I_{33} V_3 - I_{23} V_2 \\ I_{23} V_3 - I_{22} V_2 \end{bmatrix}.$$

- For the sections without a boom, there is **no change in the shear flow**.
- Therefore, the shear flow is constant in the webs that join two booms.




General Design Principle

- As a general principle, the stringers/booms are added to support bending.
- The web thicknesses are chosen to ensure the shear stresses don't exceed failure threshold (we should like to have $t = 0$ to minimize weight!).

3.1. Idealizing a Thin Rectangular Section

Stringer-Web Idealization

- Beam theory predicts that the axial stress σ_{11} varies linearly in the section. So let us consider a panel with ends A and B under stresses $\sigma_{11}(x_A) = \sigma_A$ and $\sigma_{11}(x_B) = \sigma_B$.
- While the complete panel responds to the σ_{11} distribution in reality, in the idealized panel, the “booms” alone bear the stresses (the webs have zero cross section). Since stress is proportional to the section moment, **we need to ensure that the moment along the e_n direction is conserved in the idealization process.**
- Taking moment about point A

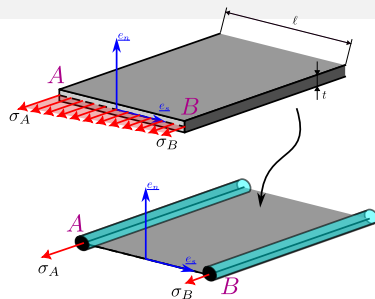

$$M_n = - \int_0^\ell x \left(\sigma_A + (\sigma_B - \sigma_A) \frac{x}{\ell} \right) t dx := -\sigma_B A r_B = M_{n,i} \implies A r_B = \frac{t\ell}{6} \left(2 + \frac{\sigma_A}{\sigma_B} \right)$$

- We also require the overall load to be conserved:


$$\int_0^\ell \sigma_A + (\sigma_B - \sigma_A) \frac{x}{\ell} t dx := \sigma_A A r_A + \sigma_B A r_B \implies A r_A = \frac{t\ell}{6} \left(2 + \frac{\sigma_B}{\sigma_A} \right).$$

3.2. Idealized Analysis of a C Section

Stringer-Web Idealization

- Let us now reconsider the C section but now using the idealization.
- We will consider the $V_3 \neq 0, V_2 = 0$ case ($M_2 \neq 0, M_3 = 0$). So the stress distribution will be proportional to X_3 .
 - On the top and bottom plates, $\sigma_A = \sigma_B$. So $Ar_A = Ar_B = \frac{bt}{2}$.
 - On the left plate, $\sigma_A = -\sigma_B$. So $Ar_A = Ar_B = \frac{ht}{6}$.
- We “stitch” the idealized panels together as shown below such that

$$Ar_A = \frac{bt}{2}, \quad Ar_B = \frac{bt}{2} + \frac{ht}{6}, \quad Ar_C = \frac{bt}{2} + \frac{ht}{6}, \quad Ar_D = \frac{bt}{2}.$$

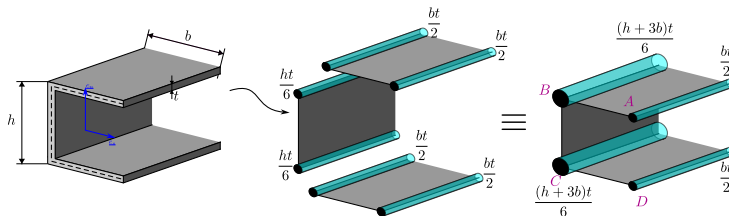


- In the web between the booms the shear flow is constant.
- The second area moment of the idealized section will be:

$$q(s) = -\frac{V_3}{I_{22}} \sum_r X_{r3} A_r$$

$$I_{22} = \frac{h^2 t (h + 6b)}{12}$$

3.2. Idealized Analysis of a C Section

Stringer-Web Idealization

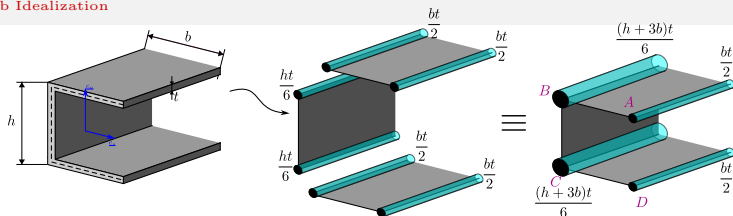

- Let's work out the shear flow now with a table:

	X_{r3}	A_r	q
A	$\frac{h}{2}$	$\frac{bt}{2}$	$-\frac{hbtV_3}{4I_{22}}$
B	$\frac{h}{2}$	$\frac{(h+3b)t}{6}$	$-\frac{ht(h+6b)V_3}{12I_{22}}$
C	$-\frac{h}{2}$	$\frac{(h+3b)t}{6}$	$-\frac{hbtV_3}{4I_{22}}$
D	$-\frac{h}{2}$	$\frac{bt}{2}$	0

- Let's estimate the shear center by computing the moment about C and setting it equal to $V_3\xi_s$ (like we did before):

$$M_C = q_{AB} \times bh = \xi_s V_3$$


$$\Rightarrow \xi_s = -\frac{h^2 b^2 t}{4I_{22}},$$

which is exactly the same as from the original section.

This process is significantly less painful than integrating the shear flow: **hereby lies its relevance**. But remember that it only provides **averaged shear flow**.

4. Saint-Venant's Principle in Practice: Shear Lag

- Loosely put, Saint Venant's principle implies that if a boundary loading condition is replaced with a point load such that the resultant magnitude and the (first) moment are equivalent to the original load, the response of the system **sufficiently far from the boundary** will be identical.
- As structural engineers, we should like to know: **How far is far?** So that we may exploit this principle in our design.
- Answering this in the general context is difficult but we shall demonstrate this process for a thin walled stringer-web section.

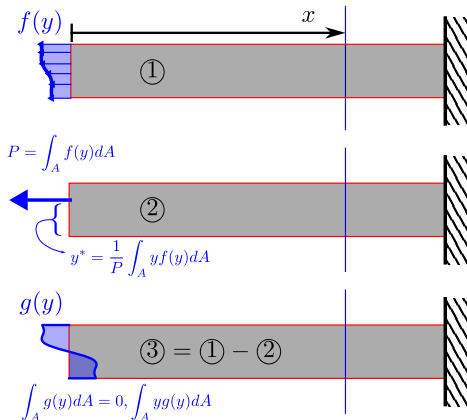


Instead of studying problems ① or ②, we shall study problem ③ which has zero resultant load and moment, so that the stress and displacement distributions “at infinity” are zero (as inferred from linear superposition).

4. Saint-Venant's Principle in Practice: Shear Lag

Example from Sun (2006) (Section 3.1)

- Let us consider the 3-boom bar under axial loading as shown.

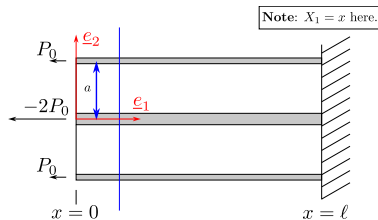

4. Saint-Venant's Principle in Practice: Shear Lag


Example from Sun (2006) (Section 3.1)

- Let us consider the 3-boom bar under axial loading as shown.
- Applying equilibrium on the section at some $X_1 = x$ ① leads to top and bottom

booms experiencing $\int_{\mathcal{A}_1} \sigma_{11} dA = P(x)$,

and the central boom,

$$\int_{\mathcal{A}_2} \sigma_{11} dA = -2P(x).$$

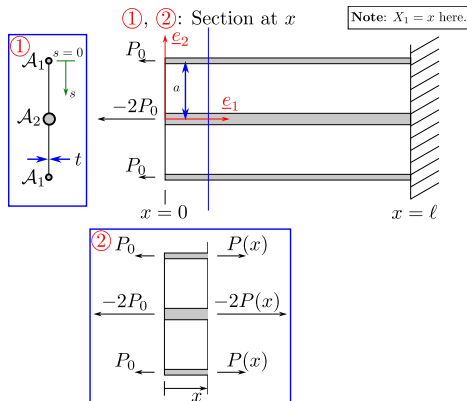

4. Saint-Venant's Principle in Practice: Shear Lag

Example from Sun (2006) (Section 3.1)

- Let us consider the 3-boom bar under axial loading as shown.
- Applying equilibrium on the section at some $X_1 = x$ ① leads to top and bottom

booms experiencing $\int_{\mathcal{A}_1} \sigma_{11} dA = P(x)$,


and the central boom,

$$\int_{\mathcal{A}_2} \sigma_{11} dA = -2P(x).$$

- Shear flow in top web is given as

$$q_{top} = -\sigma_{11,1} \mathcal{A}_1 = -P_{,1}$$

$$\text{or, } \sigma_{12} = \frac{1}{t} P_{,1}.$$

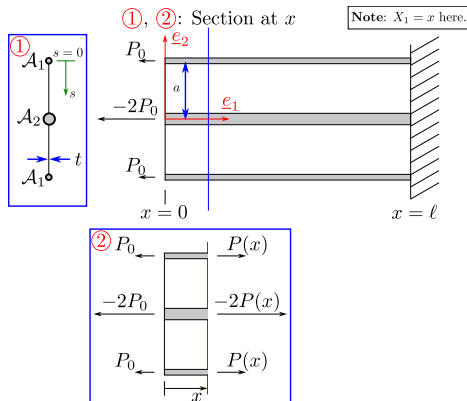

4. Saint-Venant's Principle in Practice: Shear Lag

Example from Sun (2006) (Section 3.1)

- Considering the shear differential in an infinitesimal section (construction in ③) we have,


$$\begin{aligned}\frac{\partial \gamma_{12}}{\partial x} &= \frac{1}{a}(\varepsilon_{top} - \varepsilon_{mid}) \\ &= \frac{1}{E_Y a} \left(\frac{P(x)}{\mathcal{A}_1} - \frac{-2P(x)}{\mathcal{A}_2} \right)\end{aligned}$$

- Since $\gamma_{12} = \frac{1}{G}\sigma_{12}$, this becomes,

$$\sigma_{12,1} = \frac{G}{E_Y a} \left(\frac{1}{\mathcal{A}_1} + \frac{2}{\mathcal{A}_2} \right) P(x).$$

- Combining this with the force balance relationship ($\sigma_{12} = \frac{1}{t}P_{,1}$) we obtain

$$\Rightarrow P_{,11} = \frac{Gt}{E_Y a} \left(\frac{1}{\mathcal{A}_1} + \frac{2}{\mathcal{A}_2} \right) P$$

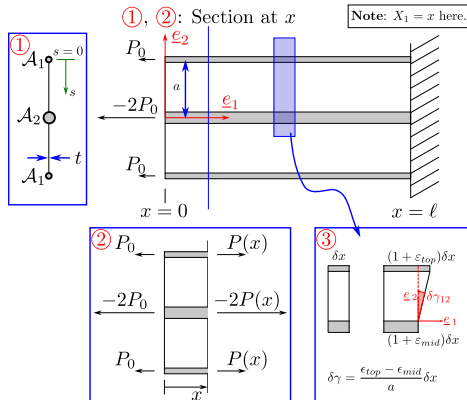

4. Saint-Venant's Principle in Practice: Shear Lag

Example from Sun (2006) (Section 3.1)

- The equation governing the **boom restoring axial force** is of the form

$$P_{,11} - \lambda^2 P = 0, \quad \lambda = \sqrt{\frac{Gt}{E_Y a} \left(\frac{1}{\mathcal{A}_1} + \frac{2}{\mathcal{A}_2} \right)}.$$

- This second order differential equation is solved by

$$P(X_1) = C_1 e^{-\lambda X_1} + C_2 e^{\lambda X_1}.$$

- Solving it over $X_1 \in (0, \infty)$, for $P(X_1 = 0) = P_0$ and $\lim_{X_1 \rightarrow \infty} P(X_1) = 0$, we obtain an **exponentially decaying** restoring force (i.e., straight stress) on the booms:

$$P(X_1) = P_0 e^{-\lambda X_1}.$$

- Substituting for σ_{12} we have (for the top web),

$$\sigma_{12} = -\frac{\lambda P_0}{t} e^{-\lambda X_1},$$

which also **decays exponentially** in X_1 .

4. Saint-Venant's Principle in Practice: Shear Lag: Decay Rate

Example from Sun (2006) (Section 3.1)

- The shear lag factor λ controls how quickly the effects “diffuse out”.
 - Large λ implies “fast” diffusion and potentially high concentration around the ends..
 - Small λ implies “slow” diffusion and potentially low concentrations.
- In general for stringer-web structures,


$$\lambda \propto \sqrt{\frac{Gt}{E_Y a \mathcal{A}}}.$$

- $\uparrow G, t$ (stiffer web, thicker web), $\uparrow \lambda$ (“faster” diffusion).
- $\uparrow E_Y, \mathcal{A}, a$ (stiffer boom, larger boom, larger section), $\downarrow \lambda$ (“slower” diffusion).

The terms “faster” and “slower” are used in the sense that “slower” implies that the stress distribution needs a longer axial distance to get averaged out (vise versa for “faster”).


4. Finite Element Simulation Results

- Let's consider a numerical example of a steel member ($E_Y = 210 \text{ GPa}$, $\nu = 0.3$) with $t = 0.5 \text{ mm}$, $a = 50 \text{ mm}$, $\mathcal{A}_1 = 25 \text{ mm}^2$, and $\mathcal{A}_2 = 100 \text{ mm}^2$
- The shear lag constant comes out to be $\lambda = 15.19 \text{ m}^{-1}$, i.e., the critical distance $\frac{1}{\lambda}$ is 65.83 mm . After 3 times this distance, the exponential function suggests that the effects will be below 5%.

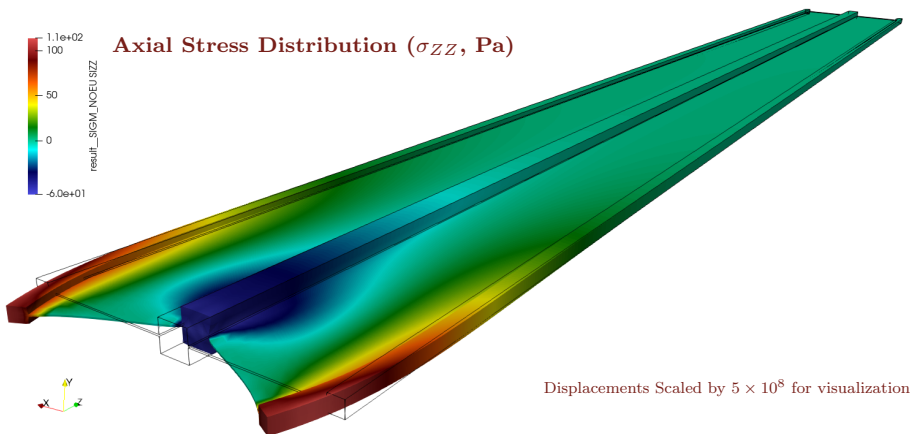


4. Finite Element Simulation Results

- Let's consider a numerical example of a steel member ($E_Y = 210 \text{ GPa}$, $\nu = 0.3$) with $t = 0.5 \text{ mm}$, $a = 50 \text{ mm}$, $\mathcal{A}_1 = 25 \text{ mm}^2$, and $\mathcal{A}_2 = 100 \text{ mm}^2$
- The shear lag constant comes out to be $\lambda = 15.19 \text{ m}^{-1}$, i.e., the critical distance $\frac{1}{\lambda}$ is 65.83 mm . After 3 times this distance, the exponential function suggests that the effects will be below 5%.

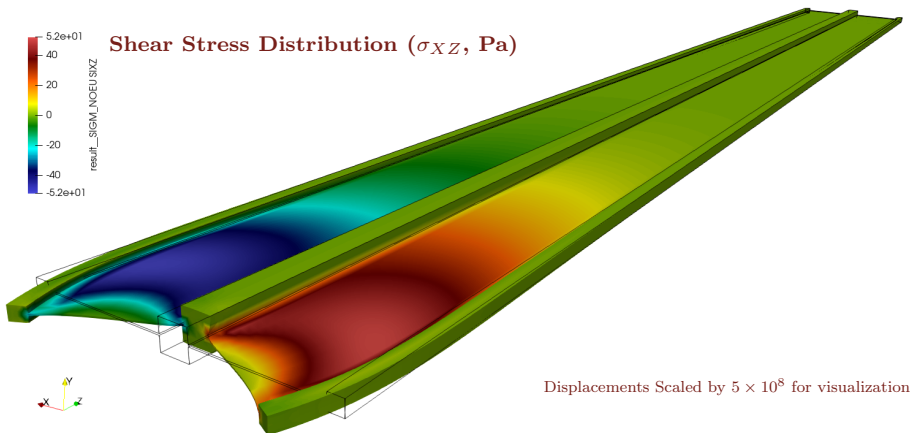


4. Finite Element Simulation Results


- Let's consider a nu
 $t = 0.5 \text{ mm}$, $a = 50$
- The shear lag cons
 65.83 mm . After 3
will be below 5%.



Shear Stress




Spatial Variation Compared Against Analysis

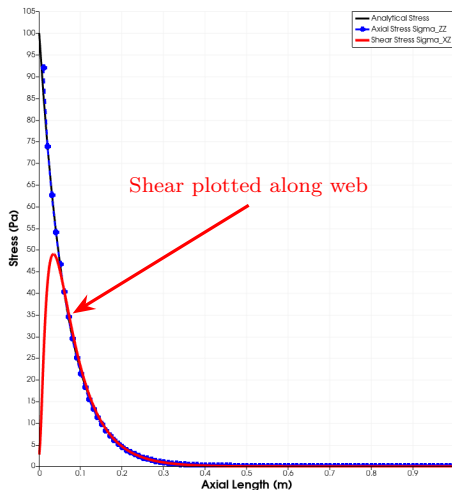

(Pa, $\nu = 0.3$) with

critical distance $\frac{1}{\lambda}$ is
suggests that the effects




by 5×10^8 for visualization

4. Saint-Venant's Principle in Practice: Shear Lag

Now What Does This Add To Our Understanding?

- Were we to add some “intrusions” into an ideally designed beam or plate, shear lag can tell us how much effect these will have on the overall behavior.
- Examples include cutouts in fuselages for windows and doors; fuel storage doors in wings, etc.

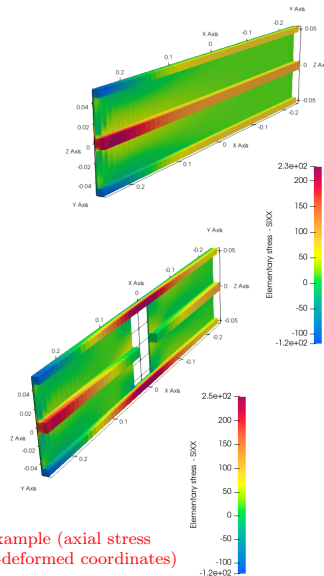

Bending example (axial stress
plotted on un-deformed coordinates)

References I

- [1] C. T. Sun. [Mechanics of Aircraft Structures](#), 2nd edition. Hoboken, N.J: Wiley, June 2006. ISBN: 978-0-471-69966-8 (cit. on pp. 2, 62–67).
- [2] T. H. G. Megson. [Aircraft Structures for Engineering Students](#), Elsevier, 2013. ISBN: 978-0-08-096905-3 (cit. on p. 2).